

General Catalog




# NC *Rotary Tables*




TSUDAKOMA Corp.

# Productivity Innovation


TSUDAKOMA products are being used all over the world for high-precision machining in the automobile, aerospace, electronics and medical industries. In pursuit of the ultimate in performance, productivity, and technical advantages, TSUDAKOMA always strives to develop innovative products. We are trying to create advantageous NC tables that best suit your needs.

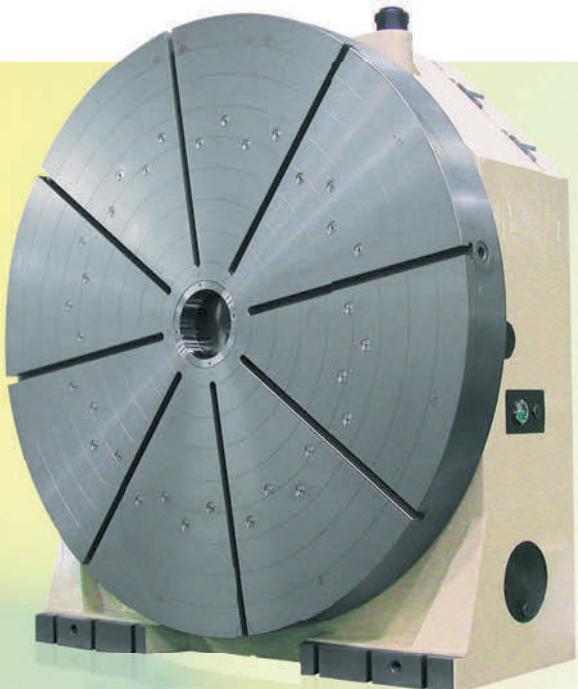

Aerospace/Parts

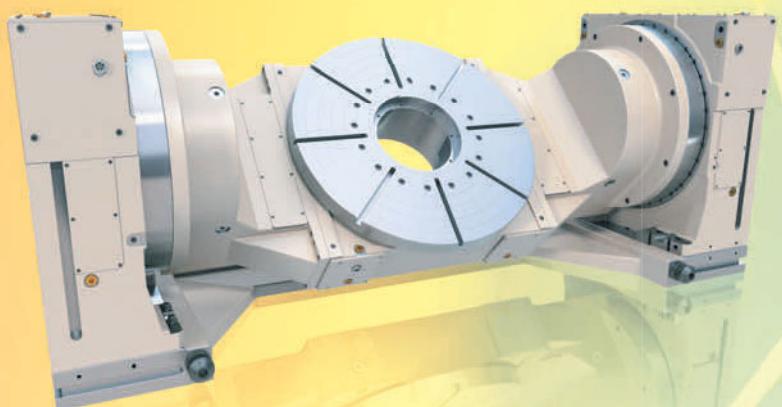

Energy

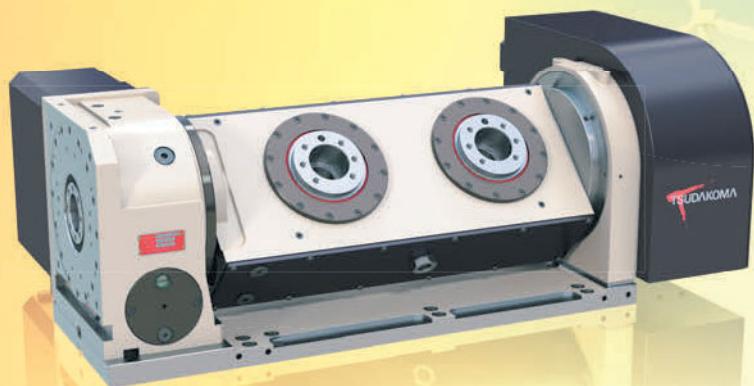

Electronics

Medical





## Automotive

General Catalog

# NC *Rotary Tables*

## I N D E X

Features	4	INDEX	8
<b>BallDrive NC Rotary Tables</b>			
Basic model	Standard type	<b>RBS</b>	<b>10</b>
	Standard type-Hydraulic-	<b>RBH</b>	<b>12</b>
Multi-spindle models	Multi-spindle type	<b>RBM</b>	<b>14</b>
<b>BallDrive NC Tilting Rotary Tables</b>			
Basic model	Standard type	<b>TBS</b>	<b>16</b>
<b>NC Rotary Tables</b>			
Basic model	Standard type	<b>RWE/RWA/RN</b>	<b>18</b>
	Standard type-Hydraulic-	<b>RWH</b>	<b>20</b>
	Rear motor mounting type	<b>RWA-B/RNCV-B</b>	<b>22</b>
Big bore model	Big bore type	<b>RWB</b>	<b>24</b>
	For horizontal machining centers	<b>RWB-K/RNCK</b>	<b>26</b>
High-rigidity model with a super big bore	Big bore type	<b>RCB</b>	<b>28</b>
Large models	For horizontal setting	<b>RCH/RNC</b>	<b>30</b>
	Horizontal motor mounting type	<b>RCV</b>	<b>32</b>
Multi-spindle models	Multi-spindle type	<b>RWM</b>	<b>34</b>

## NC Tilting Rotary Tables

Basic model	Standard type	<b>TWA/TN</b>	<b>36</b>
	Standard type	<b>TWB/TTNC</b>	<b>38</b>
Multi-spindle models	Multi-spindle type	<b>TWM</b>	<b>40</b>

<b>Direct Drive NC Rotary tables・Speciality Rotary Tables</b>		
SmartDD	<b>RDS</b>	<b>42</b>
Speciality rotary table <b>RTV/RTT</b> <b>43</b>		

<b>Direct Drive NC Tilting Rotary Table</b>		
Milling and Turning Model	<b>TDS/TDB</b>	<b>44</b>

<b>Single-axis NC Controllers TPC-Jr / TPC5</b>		
TPC-Jr Features and Functions	<b>46</b>	Installation of TPC Controller
TPC5 Features and Functions	<b>48</b>	TPC Controllers to Interlock with Machining Tools
Specifications	<b>50</b>	Time Chart
Option	<b>51</b>	TPC Standard Cable Specifications
TPC Machining Program Examples	<b>52</b>	NC Rotary Tables / TPC-Jr Dimensions and Specifications
Remote mode + M-specification	<b>52</b>	<b>56</b>

## Accessories

Chuck	<b>58</b>	Support Spindle	<b>62</b>
Tailstock	<b>60</b>	Face Plate	<b>63</b>

## Optional Specifications

Rotary Encoders and MP Scales	<b>64</b>	Pallet Clamp	<b>67</b>
Pull Stud	<b>66</b>	Air-hydraulic Booster	<b>67</b>
Rotary Joint	<b>66</b>		

## Technical Information

Applicable Servo Motors	<b>68</b>	To Make The Best Use	<b>72</b>
Applicable Cable Connectors	<b>68</b>	To Select The Best Model	<b>73</b>
Flow Chart of Control System	<b>69</b>	Inspection Standard	<b>74</b>
Indexing Cycle Time	<b>69</b>	CAUTION	<b>79</b>
Workpiece mounting space for tilting rotary tables	<b>70</b>		
Explanation of Technical Terms	<b>71</b>		

# TSUDAKOMA Original Next-Generation Drive mechanism 『BallDrive®』

The perfect drive system 'BallDrive®' realizes the highest accuracy level and no-backlash.

No-clamp machining at a light load with no-backlash, high speed and high rigidity.

Shorten cycle time to improve your productivity by zeroizing of clamp/unclamp time and more than double indexing speed ※

## No backlash

High accuracy machining without backlash

## High rigidity

Stable positioning using a powerful clamp

## Maintenance free

Extremely small aged deterioration  
Original precision is maintained

## Cycle time reduction

Twice as fast as the current model  
Clampless machining

## Power saving


High transfer efficiency with a ball rolling system

※In-house comparison

# EXCELLENT BALANCE OF SMOOTHNESS, POWER AND DURABILITY BY SPECIAL GEAR SYSTEM ASSURES THE ULTIMATE IN PERFORMANCE

**TSUDAKOMA** specially designed double-lead worm gears with full-depth teeth


The setting of the lead amount on this gear system is different depending on the rotating direction of the worm wheel and the worm spindle. By moving the worm spindle axially, the tooth engagement can be changed successively. As the backlash between the worm wheel and the worm spindle can be adjusted while keeping them in their proper positions, the ideal tooth engagement is maintained.

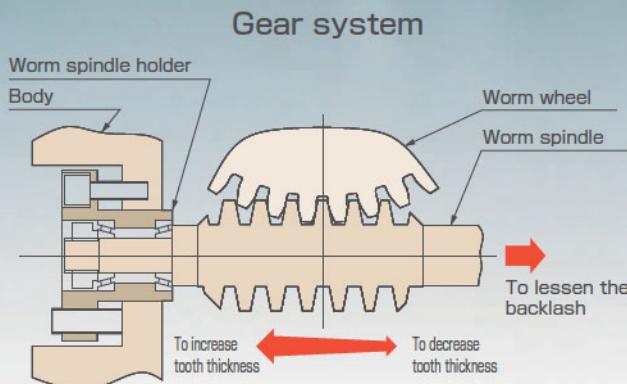

## Tooth profile

The adoption of full-depth gear teeth, instead of standard teeth, results in higher strength equal to that of a gear of a size larger in module.

## Conventional type

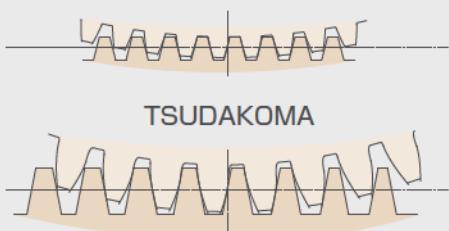

## Materials

Worm spindle: Case-hardened alloy steel  
Worm wheel: Special high-tensile brass equal in strength to a steel alloy


## Torque transfer efficiency

The combination of iron and brass produces less friction. A more effective transfer of the motor torque is achieved compared with other combinations of materials.


## Larger worm wheel

The worm wheel with a large pitch diameter creates a large engagement area and less pressure on the contact surface, resulting in high durability against wear compared with conventional gear system.

## Conventional type



TSUDAKOMA



RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNC

Multi-Spindle  
TWM

RDS

RTV  
RTT

TDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

# HIGH-LEVEL PERFORMANCE PROVEN IN MACHINING FIELDS

## BallDrive NC Rotary Tables

Basic model

### RBS/TBS-series



**High-performance model with the drive system uniquely developed**

#### No backlash

Ideally meshing rolling of steel balls with cam shaft achieves no backlash, 'play' at drive parts. It realizes the highest accuracy level for both indexing accuracy and repeatability.

#### High Speed

It enables smaller speed reduction ratio comparing with other drive system and more than twice as fast as worm gear. \*

#### High rigidity

High rigidity of BallDrive enables strong clamp and no-clamp machining at a light load.

\*In-house comparison

## Direct Drive NC Tilting Rotary Tables

Milling and Turning Model

### TDS/TDB

**Turning and Milling in One Chucking! Process Integration with this One Unit**



#### High Speed

DD motor drive enables high-speed indexing and simultaneous 5-axis machining.

#### Turning and Milling

Enables turning at MAX 3,000 min<sup>-1</sup>. The turning and indexing/milling machining processes, previously done in separate processes, are now integrated in a single machine. Machining in one chucking reduces setup time between different processes and increases workpiece accuracy.

#### No backlash

Achieve high-precision machining without backlash due to DD motor drive.

No reduction mechanism and no wear. Maintenance is basically unnecessary.

## NC Rotary Tables

Basic models

**RWE/RWA**-series

Big bore models

**RWB**-series

Basic tilting models

**TWA/TN**-series

**New standard for the ultimate  
in power and speed**

**High Speed**

The specially designed double-lead worm gear system with full-depth teeth of increased torque transfer efficiency minimizes the speed reduction ratio, improving the indexing speed. The machining cycle time is reduced.

**Strong Clamp Torque (RWA-series)**

The newly developed clamp mechanism using pneumatic pressure realizes powerful clamping. The cutting feed speed is increased. Responsivity is also increased.

**Newly developed strong hydraulic clamping system**

New clamping system enables 25% stronger clamping torque than previous model. It realizes stable machining at a distance from rotary center.

**Strong strength of worm gears**

Strength of worm gears improves 70% to 130% higher than previous model. It realizes 1 size stronger strength than previous model, which provides downsizing of the model.

**Indexing accuracy 14 sec.(the sum) guaranteed**

Our high quality control enable us to take an another step forward to elevate the indexing accuracy.

## NC Tilting Rotary Tables

**Best partner for  
five-axis machining**

**High Speed**

The specially designed double-lead worm gear system with full-depth teeth of increased torque transfer efficiency minimizes the speed reduction ratio, improving the indexing speed. The machining cycle time is reduced.

**Strong Clamp Torque**

The newly developed clamp mechanism using pneumatic pressure realizes powerful clamping. It is rigid enough for machining even at a position far from the tilting axis.

**Variety of Options**

In addition to the automatic work mounting and dismounting arrangements by a pull-stud device as well as pneumatic or hydraulic rotary joint, high precision specifications using a scale is also available.

RBS

RBH

Multi-Spindle  
**RBM**

TBS

RWE/RWA  
**RN**

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
**RWM**

TWA/TN

TWB  
TTNCMulti-Spindle  
**TWM**

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

# INDEX

## BallDrive NC Rotary Tables

### Basic models

Standard type

**RBS**



It enables high indexing speed and super productivity with top quality thanks to no backlash and high rigidity

RBS-160  
RBS-250  
RBS-320

P.10

Standard type +Hydraulic-  
**RBH**



RBH-160  
RBH-250  
RBH-320

P.12

### Multi-spindle models

Multi-spindle type

**RBM**



High production model capable of multiple workpieces machining

RBM-160-2 P.14

## BallDrive NC Tilting Rotary Tables

### Basic models

Standard type

**TBS**



It enables high indexing speed and super productivity with top quality thanks to no backlash and high rigidity

TBS-130  
TBS-160  
TBS-250

P.16

## NC Rotary Tables

### Basic models

Standard type

**RWE/RWA  
RN**



Powerful, Compact and Speedy!  
Products for processes ranging from high-speed multi-axis drilling and tapping to cam machining

Best-selling models with strong clamp torque and outstanding water-proof structure

RWE-160  
RWE-200  
RWA-160  
RWA-200  
RWA-250  
RWA-320  
RN-100

P.18

Standard type +Hydraulic-  
**RWH**



RWH-160  
RWH-200  
RWH-250  
RWH-320

P.20

Rear motor mounting type

**RWA-B  
RNCV-B**



Our flagship model various types of labor-saving and automation devices can be attached through the large-diameter bore

RWA-160R,B P.22  
RWA-200R,B  
RWA-250R,B  
RWA-320R,B  
RNCV-401R,B

P.22

### Big bore models

Big bore type

**RWB**



For horizontal machining centers

**RWB-K  
RNCK**



RWB-250K  
RWB-320K  
RWB-400K  
RWB-500K  
RNCK-631

P.26

### High-rigidity models with a super big bore

Big bore type

**RCB**



RCB-350  
RCB-450  
RCB-550

P.28

**RBS**

**RBH**

Multi-Spindle  
**RBM**

**TBS**

**RWE/RWA  
RN**

**RWH**

**RWA-B  
RNCV-B**

**RWB**

**RWB-K  
RNCK**

**RCB**

**RCH  
RNC**

**RCV**

Multi-Spindle  
**RWM**

**TWA/TN**

**TWB  
TTNC**

Multi-Spindle  
**TWM**

**RDS**

**RTV  
RTT**

**TDS  
TDB**

NC Controllers


Accessories

Options

Technical Information


## Large models

For horizontal setting

**RCH**  
**RNC**
**RCH-800**  
**RCH-1000**  
**RCH-1250**  
**RNC-1501**  
**RNC-2001**

P.30

Horizontal motor mounting type

**RCV**
**RCV-800**  
**RCV-1000**  
**RCV-1250**  
**RCV-1600**

P.32

## Multi-spindle models

Multi-spindle type

**RWM**
**RWM-160-2/3/4**  
**RWM-200-2/3/4**  
**RWM-250-2/3/4**  
**RWM-320-2/3/4**

P.34

**RBS****RBH**Multi-Spindle  
**RBM****TBS****RWE/RWA**  
**RN****RWH****RWA-B**  
**RNCV-B****RWB****RWB-K**  
**RNCK****RCB****RCH**  
**RNC****RCV**Multi-Spindle  
**RWM****TWA/TN****TWB**  
**TTNC**Multi-Spindle  
**TWM****RDS****RTV**  
**RTT****TDS**  
**TDB**

NC Controllers

Accessories

Options

Technical Information

## NC Tilting Rotary Tables

## Basic models

Standard type

**TWA/TN**
**TWA-100**  
**TWA-130**  
**TWA-160**  
**TWA-200**  
**TN-320**  
**TN-450**

P.36

**Standard type**  
**TWB**  
**TTNC**

**TWB-320**  
**TWB-630**  
**TWB-1000**  
**TTNC-1500**

P.38

## Multi-spindle models

Multi-spindle type

**TWM**
**TWM-100**  
**TWM-160**  
**TWM-250**

P.40

## High production model capable of multiple workpieces machining

## Direct Drive NC Rotary tables•Speciality Rotary Tables

SmartDD

**RDS**

Specialty rotary table

**RTV**•**RTT**
**RDS-200**  
**RTV-202**  
**RTT-112**

P.42

P.43

## Direct Drive NC Tilting Rotary Tables

Milling and Turning Model

**TDS**  
**TDB**
**TDS-200**  
**TDB-200**

P.44

## Single-axis NC Controllers

For small NC rotary tables

**TPC-Jr**
**TPC-Jr K2**  
**TPC-Jr K3**

P.46

For large NC rotary tables

**TPC5**
**TPC5 SR6**  
**TPC5 SR12**  
**TPC5 SR30**

P.48

## Accessories

P.58

Chuck  
Scroll chuck

Power chuck

Tailstock  
Manual tailstock

Hydraulic tailstock



Support spindle




Face plate




## Optional Specifications

P.64

Rotary encoders and  
MP scales for high precision


Pull-stud




Rotary joint



Pallet clamp



Air-hydraulic Booster



Standard type

# RBS RBS-160•250•320

We provide you the top productivity and high-grade machining with no backlash and high indexing speed, two times faster than previous model.



RBS-160R,H

## Specifications

Unit: mm

		RBS-160,H	RBS-250,H	RBS-320,H
<b>RWA-B</b>	Handedness	R	○	○
<b>RNCV-B</b>		L	○	○
<b>RWB</b>	Spindle diameter		φ100	φ140
<b>RWB-K</b>	Table diameter		φ160 or φ200 (Option)	φ250 (Option)
<b>RNC</b>	Center height		160	210
<b>RCB</b>	Center bore	Nose diameter	φ55H7×45	φ80H7×45
<b>RCH</b>		Through-bore	φ40	φ50
<b>RNC</b>	Table T-slot width		12H8	12H8
<b>RCV</b>	Guide block width		14h7	18h7
<b>RWM</b>	Servo motors (for FANUC)		αiS4	αiS8
<b>TWA/TN</b>	Inertia converted into motor shaft $\times 10^{-3} \text{kg}\cdot\text{m}^2$		0.19	0.42
<b>TWB</b>	Net weight	kg	60	110
<b>TTNC</b>	Speed reduction ratio		1/36	1/36
<b>TWM</b>	Table max. rpm	min <sup>-1</sup> (Motor rpm: 3,000min <sup>-1</sup> )	83.3	83.3
<b>RDS</b>	Indexing accuracy (the sum)	sec	15	15
<b>RTV</b>	Clamp system		Pneumatic	Pneumatic
<b>RTT</b>	Clamp torque /pneumatic pressure 0.49MPa	N·m	500	1,000
<b>TDS</b>	Allowable work weight	Vertical setting ( ):with tailstock	100 (200)	125 (250)
<b>TDB</b>		Horizontal setting	200	250
<b>NC Controllers</b>		F	10,800	14,400
<b>Accessories</b>		FXL	500	1,000
<b>Options</b>	Allowable load (when table is clamped)	N·m	780	1,900
<b>Technical Information</b>	Allowable work inertia	J = $\frac{W \cdot D^2}{8}$ kg·m <sup>2</sup>	0.64	1.95
				4.48

## CE correspondence model


**Tech.Info.** Servo motors of other manufacturers **P.68** When assembling a faceplate or a fixture with the main spindle **P.79**

**Option** High-precision Spec. **P.64** Rotary Joint **P.66**


## Dimensions

Unit:mm


## RBS-160R

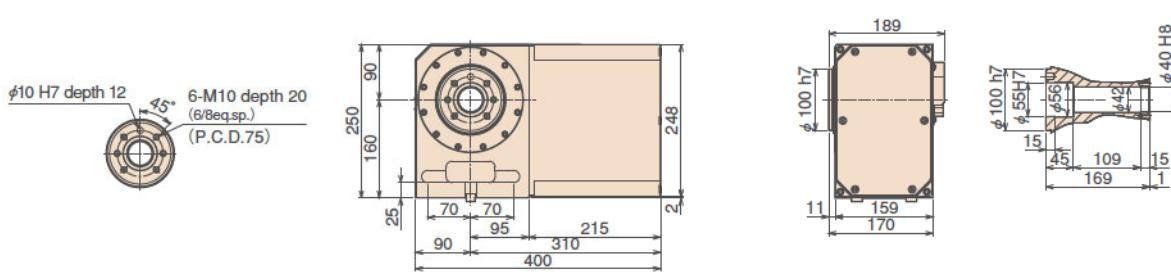

## RBS-250R

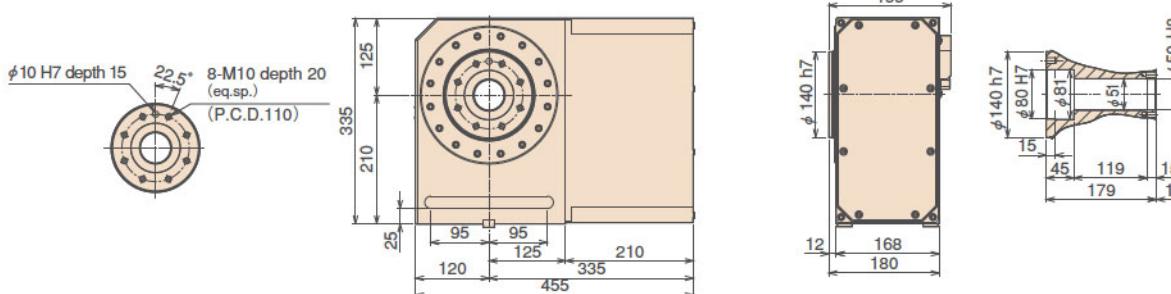

## RBS-320R

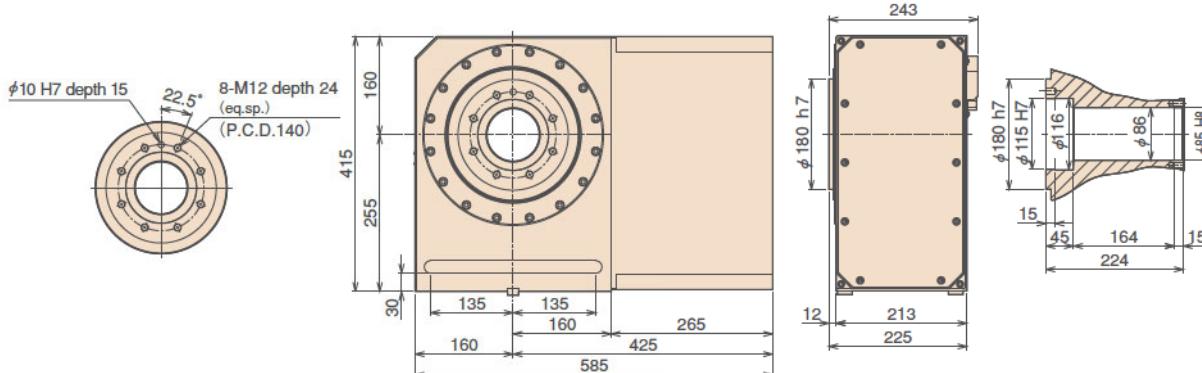

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt


Unit: mm

	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
<b>RBS-160</b>	2	—	14	—	—	—	—	—	—	—	17	8	60	—	23	12
<b>RBS-250</b>	4	40 to 120	18	25	12	80	12	33	35	22	21	11	65	40	28	16
<b>RBS-320</b>	4	55 to 147	18	30	15	90	16	31	43	25	21	11	70	46	28	16

Note 1: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Note 2: Clamping blocks are not included with the RBS-160.

## Type I

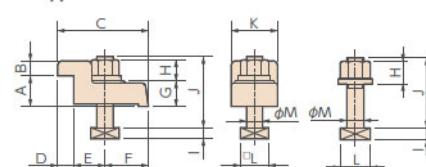

## Standard type—Hydraulic—

**RBH RBH-160•250•320**

Unit: mm

TSUDAKOMA BallDrive NC rotary table with new hydraulic clamp specification.

Selection can be made according to the fluid in the operating environment.

Increase machining efficiency and productivity of various workpieces.

## 仕様

		RBH-160	RBH-250	RBH-320
RWS	Handedness	R L	○ ○	○ ○
RBH	Spindle diameter		φ100	φ140
Multispindle RBM	Table diameter		φ160 or φ200 (Option)	φ250 (Option)
TBS	Center height		160	210
RWE/RWA RN	Center bore	Nose diameter Through-bore	φ55H7×45 φ40	φ80H7×45 φ50
RWH	Table T-slot width		12H8	12H8
RWB	Guide block width		14h7	18h7
RWB-K RNCK	Servo motors (for FANUC)		αiS4	αiS8
RCB	Inertia converted into motor shaft $\times 10^{-3} \text{kg}\cdot\text{m}^2$		0.19	0.42
RCH RNC	Net weight kg		60	110
RCV	Speed reduction ratio		1/36	1/36
RWM	Table max. rpm $\text{min}^{-1}$ (Motor rpm: 3,000 $\text{min}^{-1}$ )		83.3	83.3
TWA/TN	Indexing accuracy (the sum) 秒		15	15
TWB TTNC	Clamp system		Hydraulic	Hydraulic
TWM	Clamp torque /Hydraulic pressure 3.5Mpa N·m		500	1,000
RDS	Allowable work weight Vertical setting ( ):with tailstock kg		100 (200)	125 (250)
RTV RTT	Horizontal setting kg		200	250
TDS TDB	F N		10,800	14,400
NC Controllers	Allowable load (when table is clamped) $F \times L$ N·m		500	1,000
Accessories	Allowable load (when table is clamped) $F \times L$ N·m		780	1,900
Options	Allowable work inertia $J = \frac{W \cdot D^2}{8}$ $\text{kg}\cdot\text{m}^2$		0.64	1.95
Technical Information				4.48

## CE correspondence model


Tech.info. Servo motors of other manufacturers P.68 When assembling a faceplate or a fixture with the main spindle P.79

Option High-precision Spec. P.64 Rotary Joint P.66

## Dimensions


Unit:mm

## RBH-160R

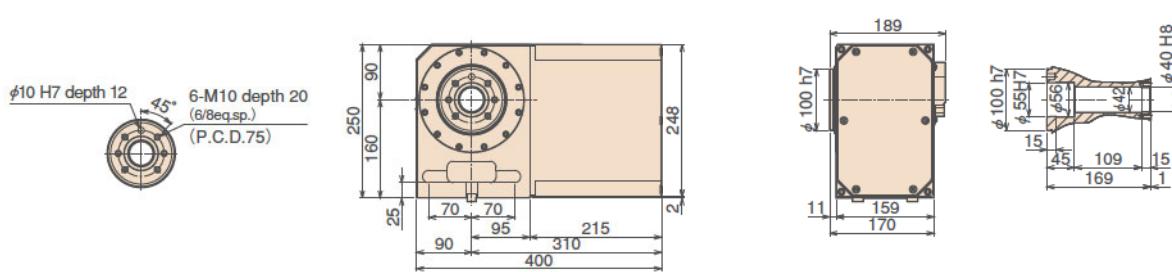


\*Size 160 is for vertical setting only.

## RBH-250R

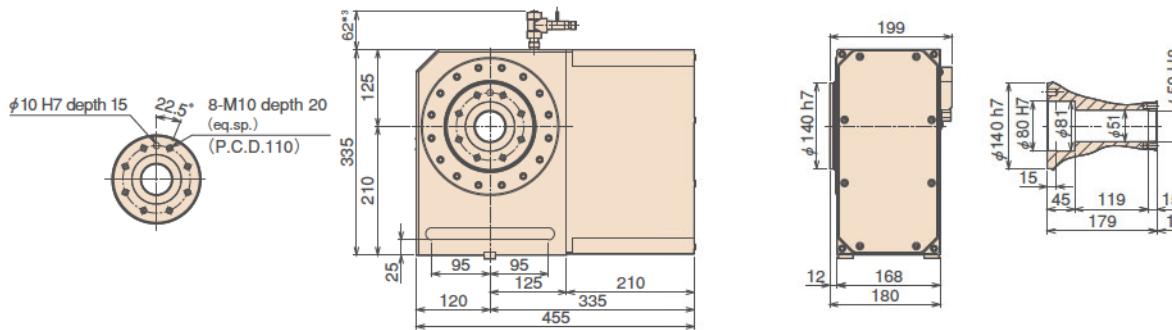

\*3 Hydraulic feed port and bleed plug are attached to the top of the frame for horizontal setting only.  
\*Size 250 can be used either horizontally or vertically. It cannot be used both horizontally and vertically.

## RBH-320R

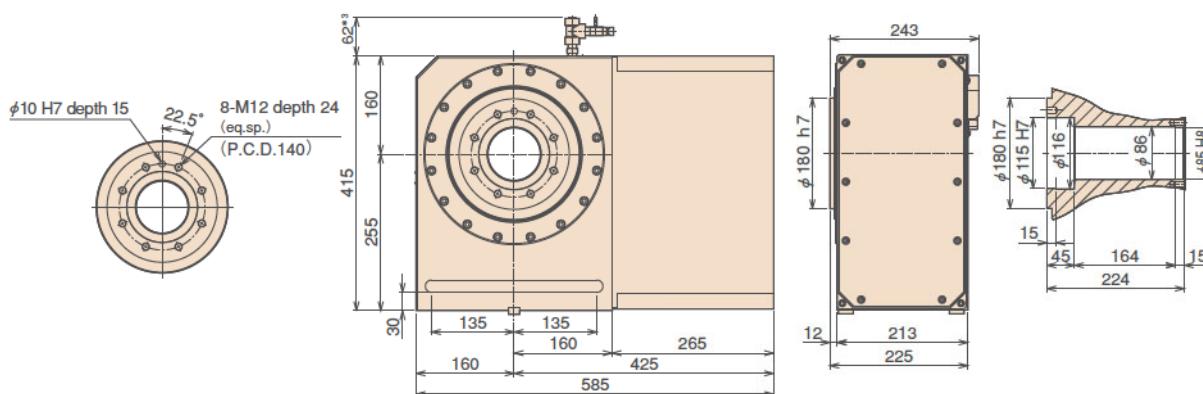

\*3 Hydraulic feed port and bleed plug are attached to the top of the frame for horizontal setting only.  
\*Size 320 can be used either horizontally or vertically. It cannot be used both horizontally and vertically.

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.


## Clamping block and bolt

	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M	Unit: mm
RBH-160	2	—	14	—	—	—	—	—	—	—	17	8	60	—	23	12	
RBH-250	4	40 to 120	18	25	12	80	12	33	35	22	21	11	65	40	28	16	
RBH-320	4	55 to 147	18	30	15	90	16	31	43	25	21	11	70	46	28	16	

Note 1: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Note 2: Clamping blocks are not included with the RBH-160.

## Type I

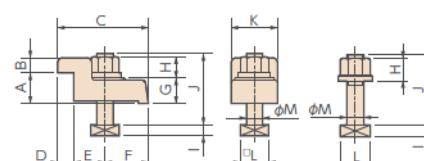

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories


Options

Technical  
Information





## Multi-spindle Type

**RBM RBM-160-2**

In addition to high-speed indexing with the BallDrive system and high productivity and high quality machining with no backlash, RBM-160 enables simultaneous machining of multiple units, further increases production efficiency.

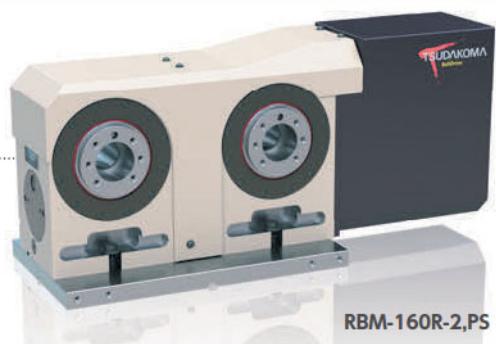

## Specifications


		Unit: mm
		<b>RBM-160-2</b>
Handedness	R L	○ ○
Spindle diameter		$\phi 100\text{h7}$
Table diameter		$\phi 160$ or $\phi 200$ (Option)
Distance between spindles		250 (PS) 320 (PL)
Center height (without base plate)		160
Center bore	Nose diameter Through-bore	$\phi 55\text{H7}$ $\phi 40$
Guide block width		14 h 7
Servo motors (for FANUC)		$\alpha iF8$
Number of axis		2-axis
Inertia converted into motor shaft	$\times 10^{-3}\text{kg}\cdot\text{m}^2$	0.87
Net weight	kg	150 (PS) 160 (PL)
Speed reduction ratio		1/36
Table max. rpm	$\text{min}^{-1}$ (Motor rpm: 3,000 $\text{min}^{-1}$ )	83.3
Clamp system		Pneumatic
Clamp torque /pneumatic pressure 0.49MPa	N·m	500
Indexing accuracy (the sum)	sec	15
Allowable work weight	 kg/axis	100
	 N	10,800
Allowable load (when table is clamped)	 N·m	500
	 N·m	780
Allowable work inertia (per single-axis)	$J = \frac{W \cdot D^2}{8}$  kg·m <sup>2</sup>	0.64

## CE correspondence model


 Servo motors of other manufacturers **P.68** When assembling a faceplate or a fixture with the main spindle **P.79**

 Rotary Joint **P.66**

| RBM-160R-2,PS

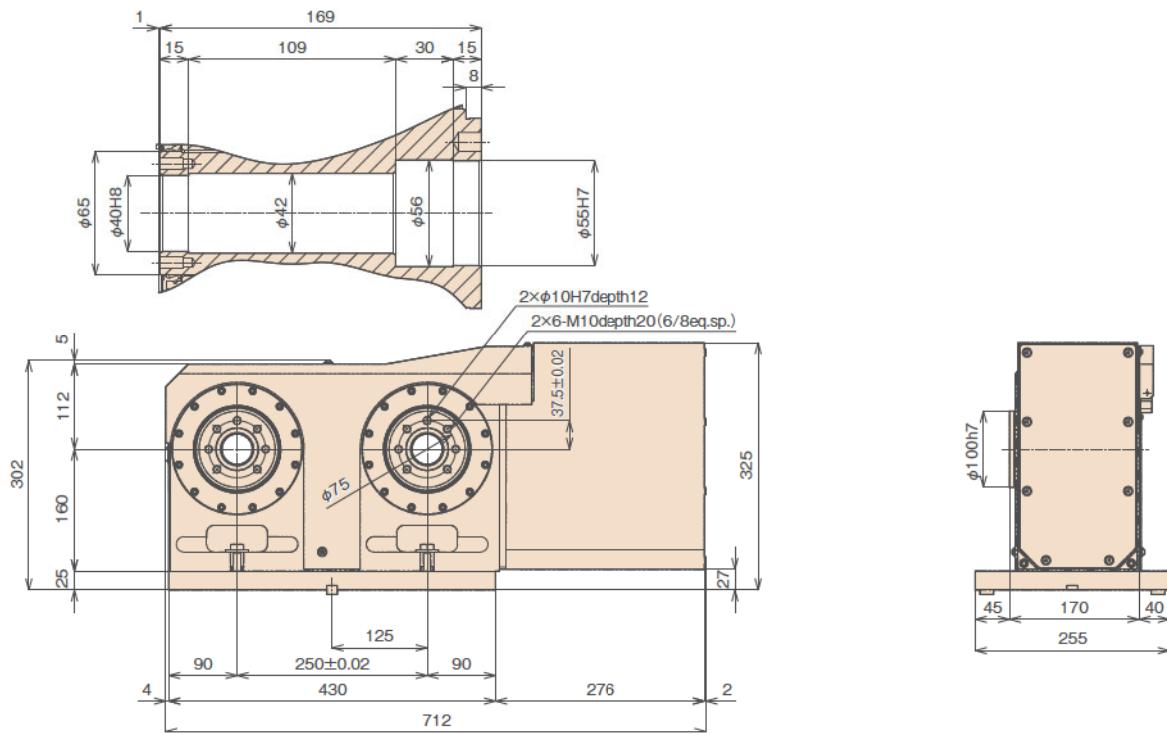

| RBM-160R-2,PL

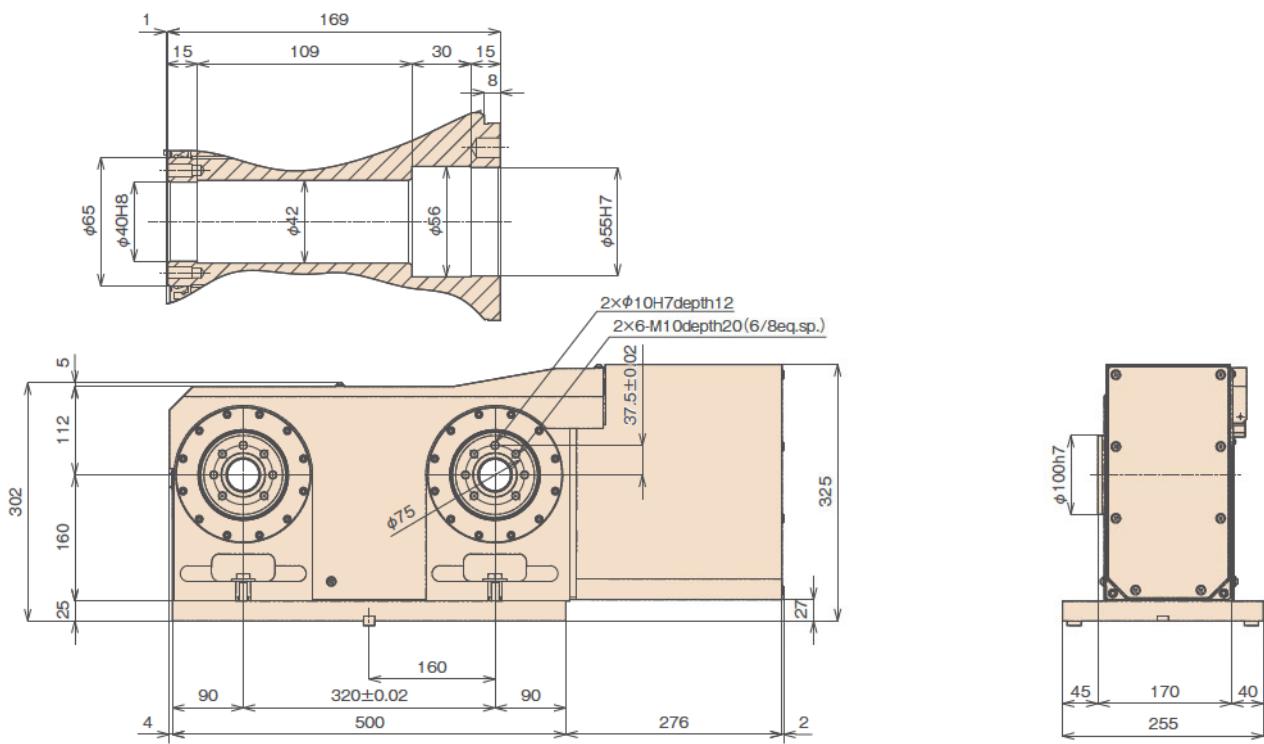

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

Standard type

**TBS TBS-130•160•250**

The latest technology, tilting rotary tables with TSUDAKOMA BallDrive system are joined in our line-up to provide perfect performance in 5-axis machining and to contribute to improve productivity.



TBS-160,H

Unit: mm

## Specifications

	<b>TBS-130,H</b>	<b>TBS-160,H</b>	<b>TBS-250,H</b>				
Tilt range	-30° to +110°	-30° to +110°	-30° to +110°				
Spindle diameter	φ90 h7	φ100 h7	φ140 h7				
Table diameter	φ135 (Option)	φ160 or 200 (Option)	φ250 (Option)				
Table height at 0° position	225 (250 w/face plate)	270 (300 w/face plate)	290 (320 w/face plate)				
Center height at 90° position	160	200	235				
Center bore	Nose diameter Through-bore	φ55 H7 (φ40 H7 w/face plate) φ40	φ55 H7 (φ50 H7 w/face plate) φ40	φ80 H7 (φ75 H7 w/face plate) φ50			
Table T-slot width		12H8 (w/face plate)	12H8 (w/face plate)	12H8 (w/face plate)			
Guide block width		14h7	18h7	18h7			
Servo motors (for FANUC)	Rotary axis αiS2	Tilt axis αiS2	Rotary axis αiS4	Tilt axis αiS8			
Inertia converted into motor shaft	×10 <sup>-3</sup> kg·m <sup>2</sup>	0.121	0.140	0.155	0.168	0.586	0.465
Speed reduction ratio	1/48	1/60	1/60	1/60	1/45	1/60	
Table max. rpm	min <sup>-1</sup> (Motor rpm: 3,000min <sup>-1</sup> )	62.5	50	50	66.6	50	
Clamp system Supplied pressure	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	
Clamp torque /pneumatic pressure 0.49MPa	N·m	500	500	500	1,000	1,000	
Indexing accuracy(the sum)	arc sec	20	—	20	—	20	
Tilting accuracy Tilt 0° to 90°	arc sec	—	30	—	30	—	
Net weight	kg	120	160	280			
Allowable work weight 0° (Horizontal)	kg	35	60	135			
Allowable work weight 0° to 90° (Tilting)	kg	20	40	85			
Allowable work moment W×L	N·m	61.1	59.6	186.7			
Allowable load F	N	3,920	10,800	14,400			
Allowable load (when table is clamped) F×L	N·m	500	500	1,000			
Allowable work inertia J= $\frac{W \cdot D^2}{8}$	kg·m <sup>2</sup>	0.08	0.19	1.05			

## CE correspondence model


Tech.info. Servo motors of other manufacturers **P.68** When assembling a faceplate or a fixture with the main spindle **P.79**

Option High-precision Spec. **P.64** Rotary Joint **P.66** Pull Stud **P.66**

## Dimensions

Unit:mm

## TBS-130

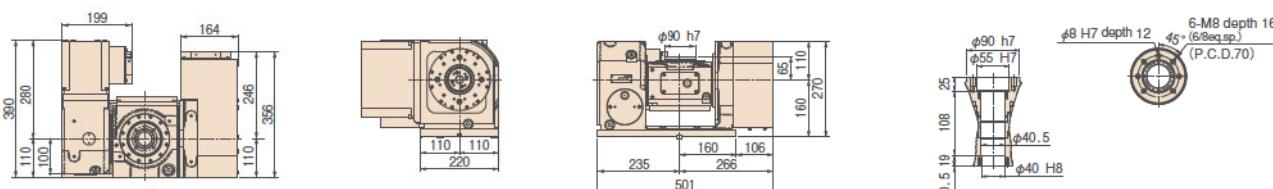

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC


RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

## TBS-160

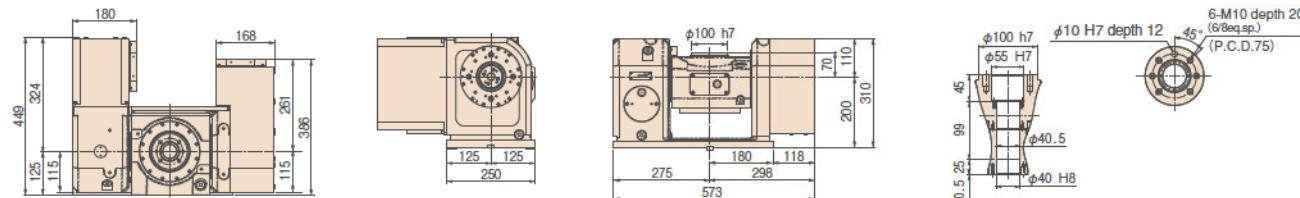

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB


RWB-K  
RNCK

RCB

RCH  
RNC

RCV

## TBS-250

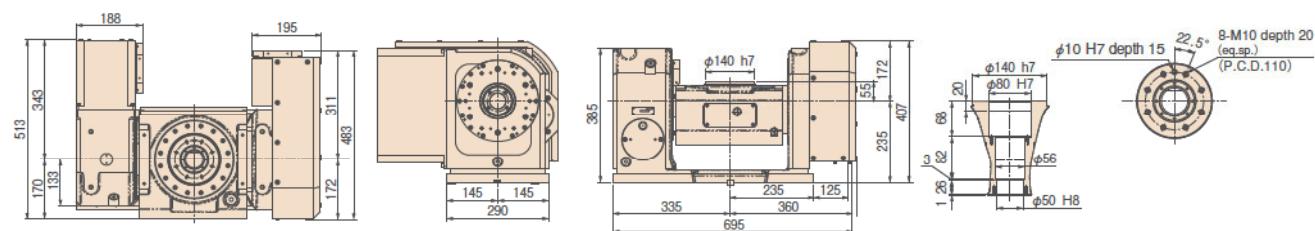

RDS

RTV

RTT

TDS

TDB

NC Controllers

Accessories

Options

Technical  
Information


Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt

	Type	Q'ty	Layout	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M	Unit:mm
TBS-130	I	4	a b	40 to 134 *	40 to 134 *	14	20	12	70	10	35	25	20	17	8	55	35	23	12
TBS-160	I	4	a b	78 to 152 63 to 107	78 to 152 63 to 107	18	20	12	70	10	35	25	17	15	11	55	35	28	16
TBS-250	I	4	a b	130 to 215 78 to 125	130 to 215 78 to 125	18	25	12	80	12	33	35	22	21	11	65	40	28	16

Note 1: \*In the case of layout b, contact us for the details about mounting.

Note 2: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)



Standard type

**RWE/RWA****RWE-160・200****RWA-160・200・250・320****RN RN-100**

The RWE/RWA series, an improvement on the best-selling, has remarkably improved cost efficiency due to its high-speed operation for use in drill and tapping machines.



RWA-160R

## Specifications

Unit: mm

		RWE/RWA-160	RWE/RWA-200	RWA-250	RWA-320	RN-100
RW-K RNCK	R	○	○	○	○	○
RCB	L	○	○	○	○	○
RCH RNC	K	○ (RWA only)	○ (RWA only)	—	—	—
RCV	Spindle diameter	φ100	φ120	φ140	φ180	φ80
TWA/TN	Table diameter*1	φ160 or 200 (Option)	φ200 or 250 (Option)	φ250 (Option)	φ320 (Option)	φ135 (Option)
TWB TTNC	Center height	135	160	160	210	110
RWM	Center bore	Nose diameter φ55H7×45	φ65H7×45	φ80H7×45	φ115H7×45	φ50H7×45
	Through-bore	φ40	φ45	φ50	φ85	φ30
TWA/TN	Table T-slot width	12H8	12H8	12H8	14H8	10H8
TWB TTNC	Guide block width	14h7	18h7	18h7	18h7	14h7
TWM	Servo motors (for FANUC)	αiS2	αiS4	αiS8	αiS8	αiF2
	Inertia converted into motor shaft ×10 <sup>-3</sup> kg·m <sup>2</sup>	0.09	0.17	0.41	0.52	0.23
RDS	Net weight kg	40	61	80	150	28
RTV RTT	Speed reduction ratio	1/72	1/72	1/90	1/120	1/36
TDS TDB	Table max. rpm min <sup>-1</sup> (Motor rpm: 3,000min <sup>-1</sup> )	41.6	41.6	33.3	25	83.3
NC Controllers	Indexing accuracy (the sum)	25	20	20	20	45
Accessories	Clamp system	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Options	Clamp torque N·m /pneumatic pressure 0.49MPa	250 (RWE) 500 (RWA)	400 (RWE) 800 (RWA)	1,000	1,500	80
Technical Information	Strength of worm gears N·m	206	288	596	939	176
	Vertical setting kg ( ):with tailstock	100 (200)	125 (250)	125 (250)	175 (350)	25 (50)
	Horizontal setting kg	200	250	250	350	50
	F N	10,800	14,400	14,400	24,800	5,880
	F×L N·m	250 (RWE) 500 (RWA)	400 (RWE) 800 (RWA)	1,000	1,500	80
	F×L N·m	780	1,900	1,900	4,700	156
	Allowable work inertia J = $\frac{W \cdot D^2}{8}$ kg·m <sup>2</sup>	0.64	1.25	1.95	4.48	0.10

CE correspondence model

(Tech.Info.) Servo motors of other manufacturers P.68

When assembling a faceplate or a fixture with the main spindle P.79




(Option) High-precision Spec. P.64

Rotary Joint P.66




## Dimensions

Unit:mm

## RWE/RWA-160






## RWE/RWA-200






RWA-160K




## RWA-250



## RWA-320



## RN-100R

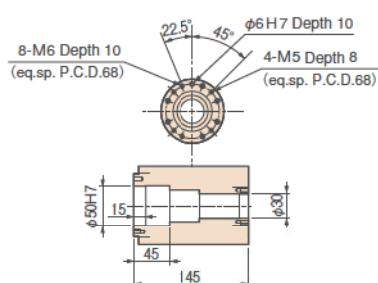


Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt

	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RWE/RWA-160	—	2	—	14	—	—	—	—	—	—	—	17	8	60	—	23	12
RWE/RWA-200	—	2	—	18	—	—	—	—	—	—	—	21	11	65	—	28	16
RWA-250	I	4	50 to 100	18	25	12	80	12	33	35	22	21	11	65	40	28	16
RWA-320	I	4	50 to 132	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RN-100	—	2	—	14	—	—	—	—	—	—	—	17	8	55	—	23	12

Note 1: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Note 2: Clamping blocks are not included with the RWE/RWA-160 and RWE/RWA-200 and RN-100.



RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## Standard type—Hydraulic—

**RWH** RWH-160•200•250•320

New hydraulic clamp specification is added to the basic model, which was only available in air clamp specification. Selection can be made according to the fluid in the operating environment.



RWH-200R

Unit: mm

## Specifications

		RWH-160	RWH-200	RWH-250	RWH-320
<b>RWA-B</b>	Handedness	R	○	○	○
<b>RNCV-B</b>		L	○	○	○
<b>RWB</b>	Spindle diameter		φ100	φ120	φ140
<b>RWB-K</b>	Table diameter		φ160 or 200 (Option)	φ200 or 250 (Option)	φ250 (Option)
<b>RNC</b>	Center height		135	160	160
<b>RCB</b>	Center bore	Nose diameter	φ55H7×45	φ65H7×45	φ80H7×45
		Through-bore	φ40	φ45	φ50
<b>RCH</b>	Table T-slot width		12H8	12H8	12H8
<b>RNC</b>	Guide block width		14h7	18h7	18h7
<b>RCV</b>	Servo motors (for FANUC)		αiS2	αiS4	αiS8
<b>RWM</b>	Inertia converted into motor shaft	×10 <sup>-3</sup> kg·m <sup>2</sup>	0.09	0.17	0.41
<b>TWA/TN</b>	Net weight	kg	40	61	80
<b>TWB</b>	Speed reduction ratio		1/72	1/72	1/90
<b>TTNC</b>	Table max. rpm	min <sup>-1</sup> (Motor rpm: 3,000min <sup>-1</sup> )	41.6	41.6	33.3
<b>TWM</b>	Indexing accuracy (the sum)	秒	25	20	20
<b>RDS</b>	Clamp system		Hydraulic	Hydraulic	Hydraulic
<b>RTV</b>	Clamp torque	N·m	500	800	1,000
<b>RTT</b>	/Hydraulic pressure 3.5Mpa				1,500
<b>TDS</b>	Strength of worm gears	N·m	206	288	596
<b>TDB</b>	Allowable work weight	Vertical setting ( ):with tailstock	kg	100 (200)	125 (250)
NC Controllers		Horizontal setting	kg	200	250
Accessories		F	N	10,800	14,400
Options		F×L	N·m	500	800
Technical Information	Allowable load (when table is clamped)		N·m	780	1,900
		F×L	N·m		
	Allowable work inertia	J = $\frac{W \cdot D^2}{8}$	kg·m <sup>2</sup>	0.64	1.25
		φD			1.95
		W			4.48

## CE correspondence model




**Tech.info** Servo motors of other manufacturers **P.68** When assembling a faceplate or a fixture with the main spindle **P.79**

**Option** High-precision Spec. **P.64** Rotary Joint **P.66**

## Dimensions




Unit:mm

## RWH-160






\*Size 160 is for vertical setting only.

## RWH-200



\*Size 200 is for vertical setting only.




## RWH-250



\*3 Hydraulic feed port and bleed plug are attached to the top of the frame for horizontal setting only.

\*Size 250 can be used either horizontally or vertically. It cannot be used both horizontally and vertically.

## RWH-320




\*3 Hydraulic feed port and bleed plug are attached to the top of the frame for horizontal setting only.

\*Size 320 can be used either horizontally or vertically. It cannot be used both horizontally and vertically.

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Type I



## Clamping block and bolt

	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M	Unit: mm
RWH-160	—	2	—	14	—	—	—	—	—	—	—	17	8	60	—	23	12	
RWH-200	—	2	—	18	—	—	—	—	—	—	—	21	11	65	—	28	16	
RWH-250	I	4	50 to 100	18	25	12	80	12	33	35	22	21	11	65	40	28	16	
RWH-320	I	4	50 to 132	18	30	15	90	16	31	43	25	21	11	70	46	28	16	

Note 1: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Note 2: Clamping blocks are not included with the RWH-160 and RWH-200.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV

RTT

TDS

TDB

NC Controllers

Accessories

Options

Technical  
Information

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

Rear motor mounting type

**RWA-B****RWA-160R,B•200R,B•250R,B•320R,B****RNCV-B** RNCV-401R,B

One of the most popular rear motor mounting types. Suitable for mounting on a compact machine tool for space saving.

## Specifications

Unit: mm

		RWA-160R,B	RWA-200R,B	RWA-250R,B	RWA-320R,B	RNCV-401R,B
<b>RCB</b>	Handedness	R ○ L —	○ —	○ —	○ —	○ —
<b>RCH RNC</b>	Spindle diameter	φ100	φ120	φ140	φ180	—
<b>RCV</b>	Table diameter	φ160 or 200 (Option)	φ200 or 250 (Option)	φ250 (Option)	φ320 (Option)	φ400
<b>TWA/TN</b>	Center height	135	160	160	210	255
<b>TWB TTNC</b>	Center bore	Nose diameter φ55H7×45 Through-bore φ40	φ65H7×45 φ45	φ80H7×45 φ50	φ115H7×45 φ85	φ40H7×21 φ40
<b>TWM</b>	Table T-slot width	12H8	12H8	12H8	14H8	14H8
<b>RDS</b>	Guide block width	14h7	18h7	18h7	18h7	18h7
<b>RTV RTT</b>	Servo motors (for FANUC)	αiS2	αiS4	αiS8	αiS8	αiF12
<b>TDS TDB</b>	Inertia converted into motor shaft $\times 10^{-3} \text{kg}\cdot\text{m}^2$	0.56	0.64	0.97	0.84	4.01
<b>NC Controllers</b>	Net weight kg	55	77	95	165	330
<b>RTV RTT</b>	Speed reduction ratio	1/72	1/72	1/90	1/120	1/180
<b>TDS TDB</b>	Table max. rpm min <sup>-1</sup> (Motor rpm: 3,000min <sup>-1</sup> )	41.6	41.6	33.3	25	11.1
<b>RTV RTT</b>	Indexing accuracy (the sum) sec	25	20	20	20	15
<b>RTV RTT</b>	Clamp system	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Hydraulic or air-hydraulic (Option)
<b>RTV RTT</b>	Clamp torque /pneumatic pressure 0.49MPa N·m	500	800	1,000	1,500	1,764 (Hydraulic pressure 3.5Mpa)
<b>RTV RTT</b>	Strength of worm gears N·m	206	288	596	939	1,666
<b>RTV RTT</b>	Allowable work weight Vertical setting ( ):with tailstock kg	100 (200)	125 (250)	125 (250)	175 (350)	200 (500)
<b>RTV RTT</b>	Allowable load F N	10,800	14,400	14,400	24,800	39,200
<b>RTV RTT</b>	Allowable load (when table is clamped) F×L N·m	500	800	1,000	1,500	1,764
<b>RTV RTT</b>	Allowable load F×L N·m	780	1,900	1,900	4,700	2,450
<b>RTV RTT</b>	Allowable work inertia J = $\frac{W \cdot D^2}{8}$ kg·m <sup>2</sup>	0.64	1.25	1.95	4.48	9.7

CE correspondence model (excluding RNCV-B)

(Tech.info.) Servo motors of other manufacturers P.68


When assembling a faceplate or a fixture with the main spindle P.79

(Option) High-precision Spec. P.64


## Dimensions

Unit: mm


## RWA-160R,B

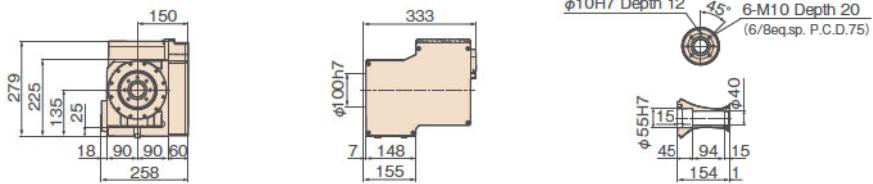


## RWA-200R,B

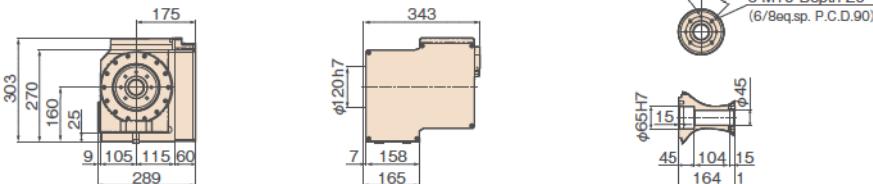


## RWA-250R,B

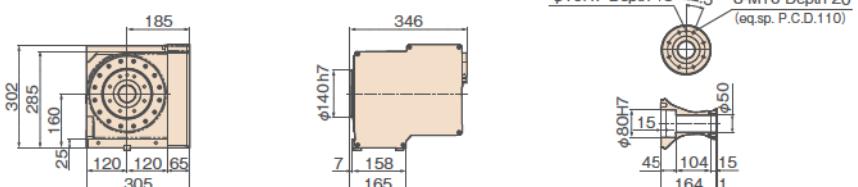

## RWA-320R,B

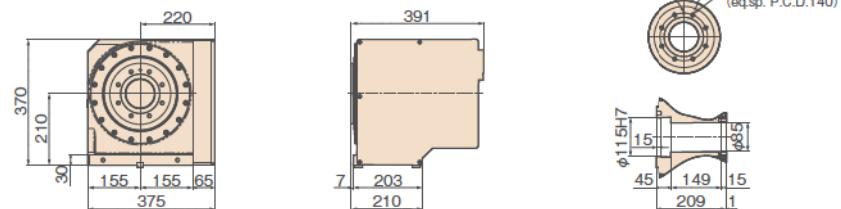

## RNCV-401R,B

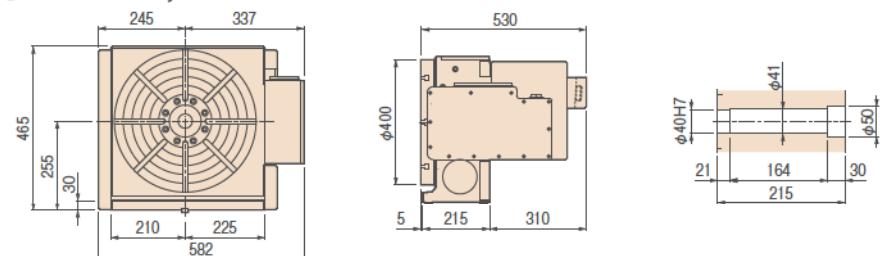

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt

	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RWA-160R,B	—	2	—	14	—	—	—	—	—	—	—	17	8	60	—	23	12
RWA-200R,B	—	2	—	18	—	—	—	—	—	—	—	21	11	65	—	28	16
RWA-250R,B	I	4	50 to 100	18	25	12	80	12	33	35	22	21	11	65	40	28	16
RWA-320R,B	I	4	50 to 132	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RNCV-401R,B	I	4	55 to 155	18	30	15	90	16	31	43	25	21	11	70	46	28	16


Note 1: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Note 2: Clamping blocks are not included in the RWA-160R,B and RWA-200R,B.



RNCV-401R,B

Type I



RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## Big bore type

**RWB****RWB- 250•320•  
400•500•630**

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B**RWB**RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB


NC Controllers

Accessories

Options

Technical  
Information

Our flagship models equipped with state-of-the-art TSUDAKOMA technology. It realizes stronger clamping torque and strength of worm gears than previous model. A larger through-bore size enables more ports number of rotary joint.

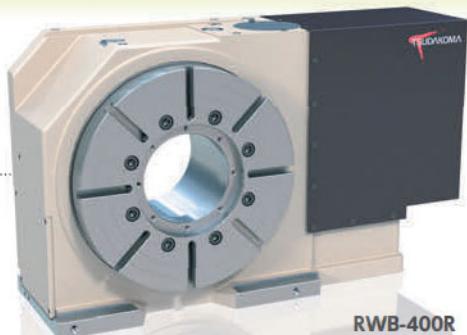

RWB-400R

Unit: mm

## Specifications

		RWB-250	RWB-320	RWB-400	RWB-500	RWB-630	
Handedness	R	○	○	○	○	○	
	L	○	○	○	○	—	
Table diameter		φ 250	φ 320	φ 400	φ 500	φ 630	
Center height		160	210	255	310	400	
Center bore	Nose diameter	φ 105H7	φ 150H7	φ 200H7	φ 220H7	φ 220H7	
	Through-bore	φ 80	φ 120	φ 160	φ 181	φ 181	
Table T-slot width		12H7	14H7	14H7	18H7	18H7	
Guide block width		18h7	18h7	18h7	18h7	18h7	
Servo motors (for FANUC)		αiF8	αiF12	αiF12	αiF12	αiF22	
Inertia converted into motor shaft	×10 <sup>-3</sup> kg·m <sup>2</sup>	1.27	3.53	4.63	4.25	4.36	
Net weight	kg	125	250	360	620	800	
Speed reduction ratio		1/90	1/120	1/120	1/180	1/180	
Table max. rpm	min <sup>-1</sup> (Motor rpm: 2,000min <sup>-1</sup> )	22.2	16.6	16.6	11.1	11.1	
Indexing accuracy (the sum)	sec	14	14	14	14	14	
Clamp system		Hydraulic or air-hydraulic (Option)					
Clamp torque /Hydraulic pressure 3.5MPa	N·m	1,300 (3.5MPa) 2,000 (4.9MPa)	3,100 (3.5MPa) 4,700 (4.9MPa)	5,500 (3.5MPa) 8,000 (4.9MPa)	7,600 (3.5MPa) 11,000 (4.9MPa)	7,600 (3.5MPa) 11,000 (4.9MPa)	
Strength of worm gears	N·m	1,011	2,127	3,958	5,601	5,601	
Allowable work weight	Vertical setting 	kg	175	250	300	600	600
	Vertical setting (with tailstock)		350	500	600	1,200	1,200
	Vertical setting (with SSB)		900	1,500	1,800	3,600	3,600
Horizontal setting 	kg	350	500	600	1,200	1,200	
Allowable load (when table is clamped)	F 	N	35,000	89,000	109,000	240,000	240,000
	F×L 	N·m	1,300 (3.5MPa) 2,000 (4.9MPa)	3,100 (3.5MPa) 4,700 (4.9MPa)	5,500 (MPa) 8,000 (MPa)	7,600 (3.5MPa) 11,000 (4.9MPa)	7,600 (3.5MPa) 11,000 (4.9MPa)
Allowable work inertia	F×L 	N·m	1,500	5,300	7,800	17,000	17,000
	J = $\frac{W \cdot D^2}{8}$ 	kg·m <sup>2</sup>	7	19	36	112	112

## CE correspondence model

For tables with a diameter of 800 or more, please order a big bore type of the following models:

Tables diameter	Model	Center bore	Specifications
φ 800	RCV-800	φ 360	P.32
φ 1000	RCV-1000	φ 410	P.32
φ 1250	RCV-1250	φ 500	P.32

Tech.Info.

Servo motors of other manufacturers P.68

Option


High-precision Spec. P.64 Pull Stud P.66

Rotary Joint P.66 Air-hydraulic Booster P.67


## Dimensions

Unit: mm


## RWB-250R

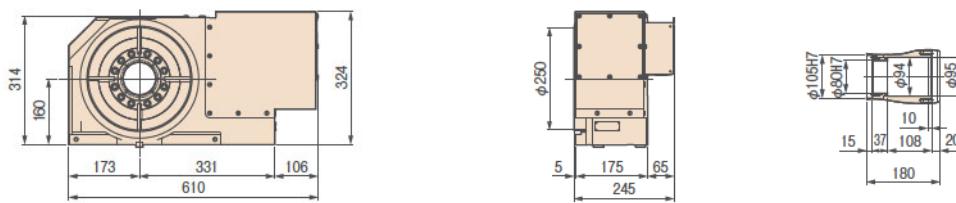


## RWB-320R

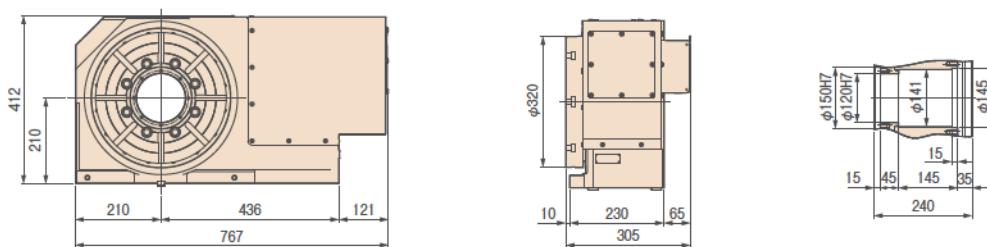


## RWB-400R

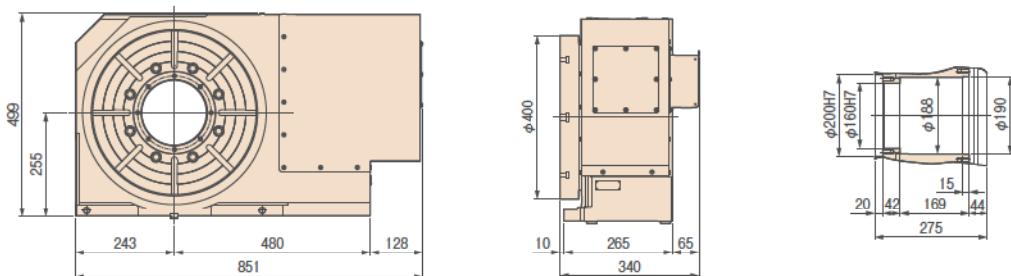

## RWB-500R

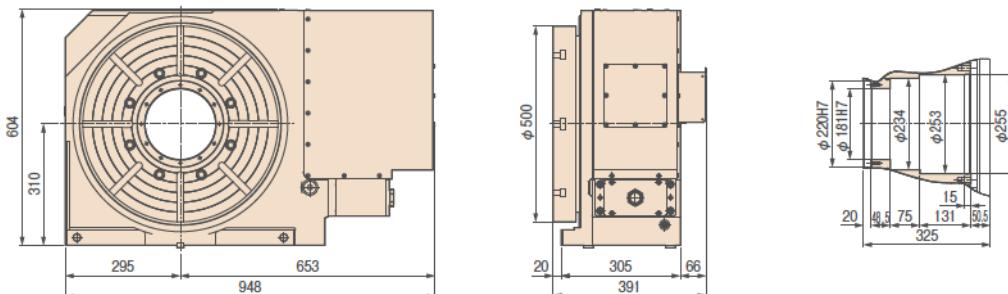

## RWB-630

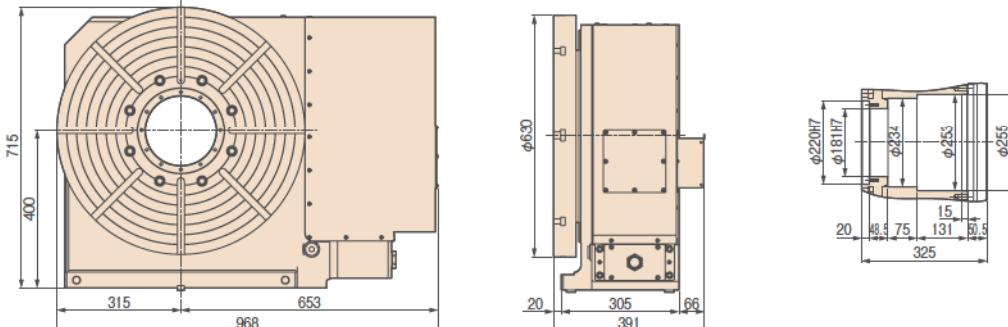


Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt

Unit: mm

	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RWB-250	I	4	50 to 125	18	25	12	80	12	33	35	22	21	11	65	40	28	16
RWB-320	I	4	73 to 162	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-400	I	4	73 to 193	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-500	I	4	73 to 233	18	40	20	110	18	42	50	25	21	11	70	46	28	16
RWB-630	I	4	73 to 233	18	40	20	110	18	42	50	25	21	11	70	46	28	16

Type I



Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

For horizontal machining centers

# RWB-K

RWB-250K・320K・400K・500K

# RNCK

RNCK-631

Flagship model with highest-class specifications exclusively for horizontal machining centers. A popular for the aircraft, automobile and cutting tool industries. A larger through-bore size enables more ports number of rotary joint than previous model.



RWB-400K

Unit: mm

## Specifications

		RWB-250K	RWB-320K	RWB-400K	RWB-500K	RNCK-631	
Table diameter		φ 250	φ 320	φ 400	φ 500	φ 630	
Center height		160	210	255	310	400	
Center bore	Nose diameter	φ 105H7	φ 150H7	φ 200H7	φ 220H7	φ 60H6	
	Through-bore	φ 80	φ 120	φ 160	φ 181	φ 60	
Table T-slot width*1		12H7	14H7	14H7	18H7	18H7	
Guide block width		18h7	18h7	18h7	18h7	18h7	
Servo motors(for FANUC)		αiF8	αiF12	αiF12	αiF12	αiF12	
Inertia converted into motor shaft	× 10 <sup>-3</sup> kg·m <sup>2</sup>	1.27	3.53	4.63	4.25	5.55	
Net weight	kg	130	250	370	590	800	
Speed reduction ratio		1/90	1/120	1/120	1/180	1/180	
Table max. rpm	min <sup>-1</sup> (Motor rpm: 2,000min <sup>-1</sup> )	22.2	16.6	16.1	11.1	11.1	
Indexing accuracy(the sum)	sec	14	14	14	14	15	
Clamp system		Hydraulic or air-hydraulic (Option)					
Clamp torque /Hydraulic pressure 3.5MPa	N·m	1,300 (3.5MPa) 2,000 (4.9MPa)	3,100 (3.5MPa) 4,700 (4.9MPa)	5,500 (3.5MPa) 8,000 (4.9MPa)	7,600 (3.5MPa) 11,000 (4.9MPa)	4,410 (3.5MPa)	
Strength of worm gears	N·m	1,011	2,127	3,958	5,601	4,116	
Allowable work weight	Vertical setting 	kg	175	250	300	600	400
	Vertical setting (with tailstock)		350	500	600	1,200	800
	Vertical setting (with SSB)		900	1,500	1,800	3,600	—
	F 	N	35,000	89,000	109,000	240,000	49,000
Allowable load (when table is clamped)	F×L 	N·m	1,300 (3.5MPa) 2,000 (4.9MPa)	3,100 (3.5MPa) 4,700 (4.9MPa)	5,500 (MPa) 8,000 (MPa)	7,600 (3.5MPa) 11,000 (4.9MPa)	4,410
	F×L 	N·m	1,500	5,300	7,800	17,000	7,840
Allowable work inertia	J = $\frac{\phi D^2}{8} \cdot W$ 	kg·m <sup>2</sup>	7	19	36	112	49.6

### CE correspondence model (excluding RNCK)

For tables with a diameter of 800 or more, please order a big bore type of the following models:

Tables diameter	Model	Center bore	Specifications
φ 800	RCV-800 (Motor mounted on top)	φ 360	P.32
φ 1000	RCV-1000 (Motor mounted on top)	φ 410	P.32
φ 1250	RCV-1250 (Motor mounted on top)	φ 500	P.32

Note: For the RNCK-631, a basic model (for vertical machining centers) is also available. (for standard bore)

Tech.Info.

Servo motors of other manufacturers P.68

Option

High-precision Spec. P.64

Pull Stud P.66


Rotary Joint P.66

Air-hydraulic Booster P.67


## Dimensions

Unit: mm


## RWB-250K

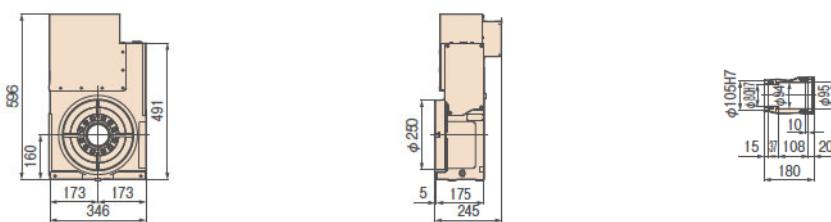


## RWB-320K

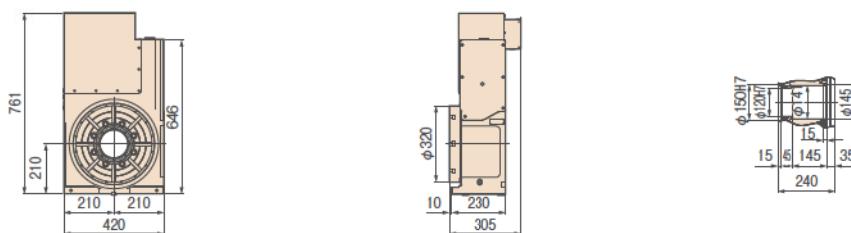


## RWB-400K

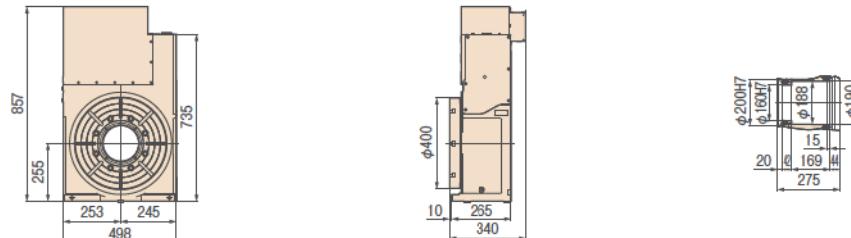

## RWB-500K

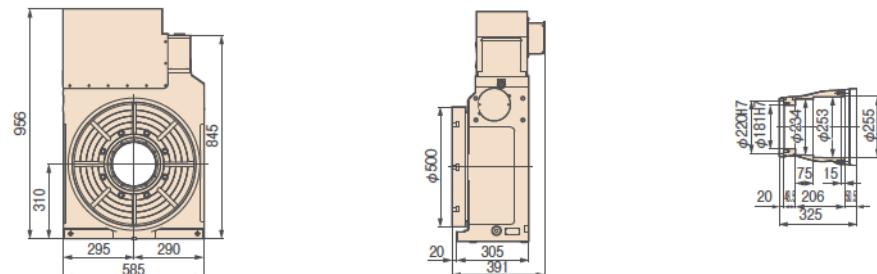

## RNCK-631

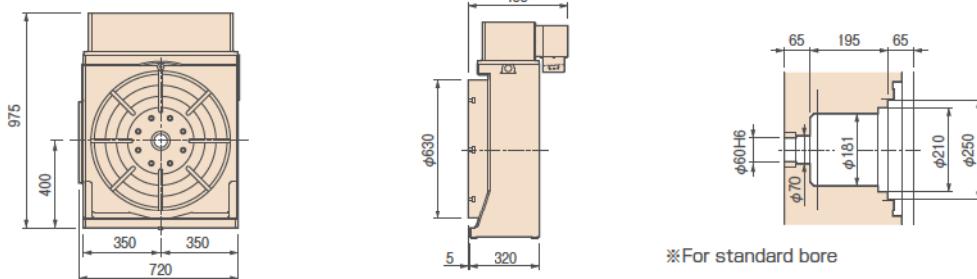

\*For standard bore


Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt


	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RWB-250K	I	4	50 to 125	18	25	12	80	12	33	35	22	21	11	65	40	28	16
RWB-320K	I	4	73 to 162	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-400K	I	4	73 to 160	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-500K	I	4	73 to 200	18	40	20	110	18	42	50	25	21	11	70	46	28	16
RNCK-631	II	4	100 to 255	18	40	18	63	18	15	30	58	21	11	105	60	28	16

Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

## Type I



## Type II



RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

Big bore type

# RCB RCB-350•450•550

Main spindle with highly rigid bearings and table with high overall rigidity enable machining of hard materials such as aircraft components. Machining at a position closer to the face plate is made possible by inserting the workpiece through the large bore.



RCB-550

Unit: mm

## Specifications

		RCB-350	RCB-450	RCB-550
Handedness	R	○	○	○
	L	—	—	—
	K	○	○	○
Table diameter		φ350	φ450	φ550
Center height		255	310	350
Center bore	Nose diameter	φ245H7	φ295H7	φ345H7
	Through-bore	φ216	φ265	φ315
Table T-slot width		14H7	14H7	18H7
Guide block width		18h7	18h7	18h7
Servo motors (for FANUC)		αiF12	αiF22	αiF22
Inertia converted into motor shaft $\times 10^{-3}\text{kg}\cdot\text{m}^2$		3.48	6.14	5.84
Net weight	kg	330	520	720
Speed reduction ratio		1/90	1/90	1/120
Table max. rpm $\text{min}^{-1}$ (Motor rpm: 2,000min $^{-1}$ )		22.2	22.2	16.6
Indexing accuracy (the sum)	sec	15	15	15
Clamp system		Hydraulic	Hydraulic	Hydraulic
Clamp torque /hydraulic pressure 3.5MPa	N·m	3,300	4,700	6,500
Strength of worm gears	N·m	1,942	3,276	4,716
Allowable work weight ( ):with tailstock	Vertical setting kg	400 (800)	700 (1,400)	1,000 (2,000)
Allowable load (when table is clamped)	F N	50,000	85,000	150,000
	F×L N·m	3,300	4,700	6,500
	F×L N·m	3,600	7,300	15,000
Allowable work inertia	$J = \frac{W \cdot D^2}{8}$ kg·m $^2$	6.1	17.7	37.8


Tech.info. Servo motors of other manufacturers P.68 When assembling a faceplate or a fixture with the main spindle P.79

Option Air-hydraulic Booster P.67


## Dimensions

Unit: mm


## RCB-350R

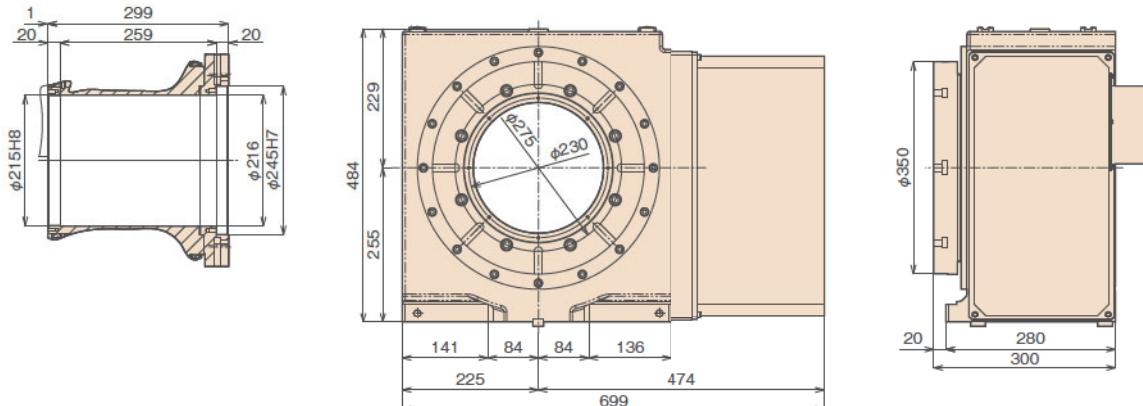

## RCB-450R

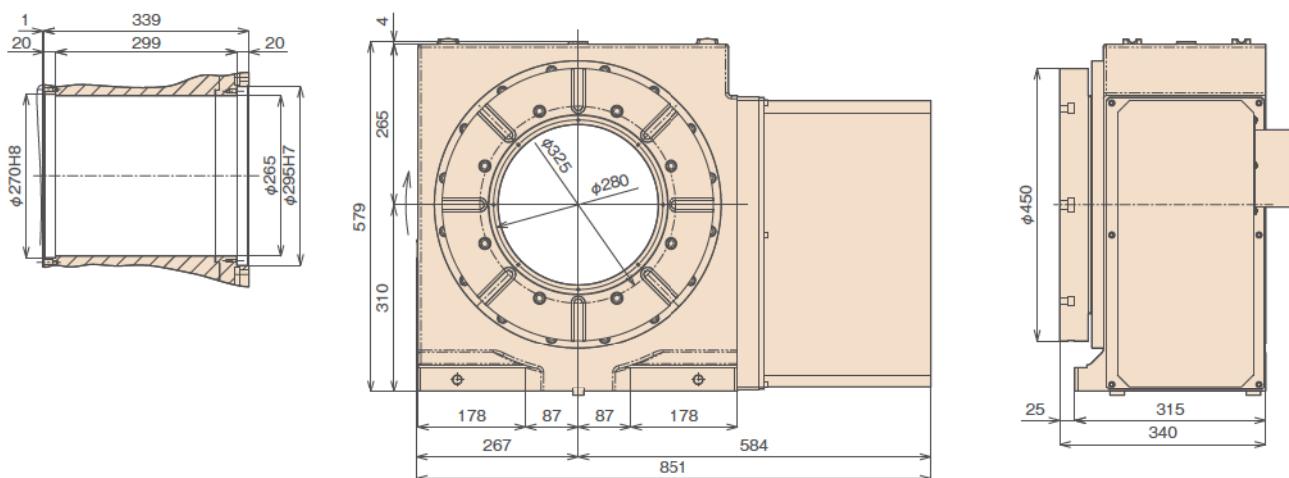

## RCB-550R

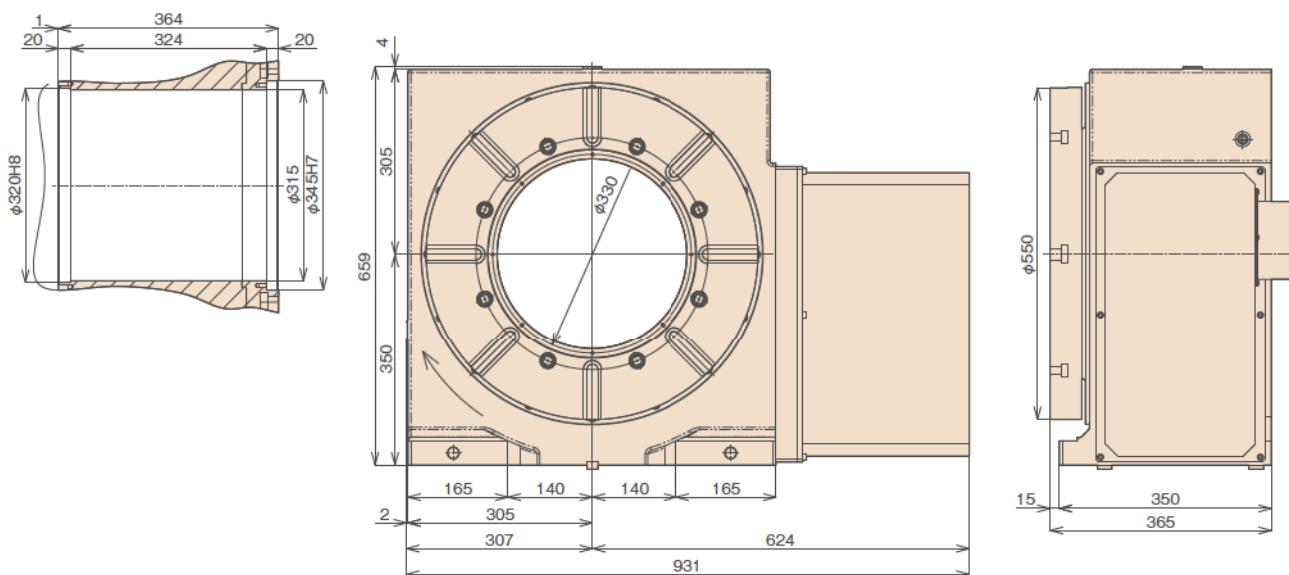


Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt

Unit: mm

	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RCB-350	I	4	107 to 197	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RCB-450	I	4	113 to 242	18	40	20	110	18	42	50	25	21	11	70	46	28	16
RCB-550	I	4	163 to 282	18	40	20	110	18	42	50	25	21	11	70	46	28	16



Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories


Options

Technical  
Information

For horizontal setting

# RCH RCH-800•1000•1250

# RNC RNC-1501•2001

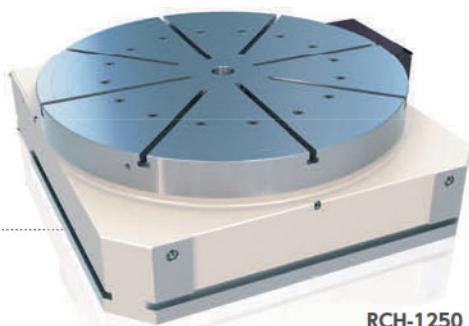

RCH-1250

Horizontal large-capacity model with high rigidity is good for machining heavy workpieces with large size double column and 5-face M/C.

## Specifications

Unit: mm

		RCH-800	RCH-1000	RCH-1250	RNC-1501	RNC-2001
<b>RWB</b>	Table diameter ( ):option	φ800(φ1,000)	φ1,000(φ1,200)	φ1,250(φ1,500)	φ1,500	φ2,000
<b>RWB-K RNCK</b>	Table height	320	330	410	400	620
<b>RCB</b>	Center bore Nose diameter	φ75H7×30	φ75H7×30	φ75H7×30	φ75H7	φ225H7
<b>RCH RNC</b>	Table T-slot width	18H7	22H7	22H7	28H7	28H7
<b>RCV</b>	Guide block width	22h7	22h7	22h7	—	—
<b>RWM</b>	Servo motors(for FANUC)	αiF12	αiF22	αiF22	αiF22	αiF30
	Inertia converted into motor shaft $\times 10^{-3} \text{kg}\cdot\text{m}^2$	4.72	8.24	5.04	5.6	17.2
<b>TWA/TN</b>	Net weight kg	1,150	1,700	3,100	3,600	8,000
<b>TWB TTNC</b>	Speed reduction ratio	1/360	1/360	1/720	1/720	1/720
<b>TWM</b>	Table max. rpm $\text{min}^{-1}$ (Motor rpm: 2,000 $\text{min}^{-1}$ )	5.5	5.5	2.7	2.7	2.7
<b>TDS TDB</b>	Indexing accuracy(the sum) sec	15	15	15	15	15
<b>RDS</b>	Clamp system	Hydraulic or air-hydraulic(Option)				
<b>RTV RTT</b>	Clamp torque Hydraulic pressure 3.5Mpa N·m	16,000	20,000	33,000	9,800	19,600
<b>TDS TDB</b>	Strength of worm gears N·m	7,840	13,230	25,000	21,560	49,000
<b>RTV RTT</b>	Allowable work weight kg	4,000	7,000	14,000	8,000	10,000
<b>TDS TDB</b>	F N	100,000	185,000	383,000	49,000	58,800
<b>NC Controllers</b>	Allowable load (when table is clamped) N·m	16,000	20,000	33,000	9,800	19,600
<b>Accessories</b>	F×L N·m	11,600	22,900	56,700	24,500	34,300
<b>Options</b>	Allowable work inertia $J = \frac{\phi D^2}{8} \cdot \frac{W}{W}$ $\text{kg}\cdot\text{m}^2$	320	874	2,734	2,255	4,900
<b>Technical Information</b>						



## CE correspondence model(excluding RNC)

(Tech.info.) Servo motors of other manufacturers P.68




(Option) High-precision Spec. P.64 Air-hydraulic Booster P.67

## Dimensions



Unit: mm

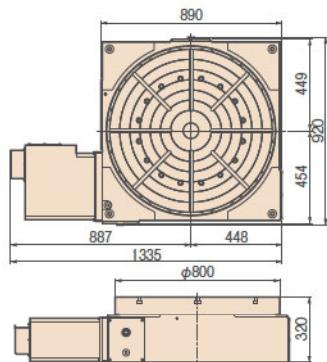**RCH-800****RNC-2001**

Large NC rotary table with a diameter of 2,000mm.  
Used for the position detecting device for controlling the posture of artificial satellites and other devices.  
Indexing accuracy: ±3 sec  
Minimal angular indication: 0.5 sec

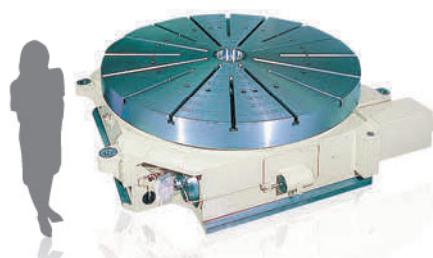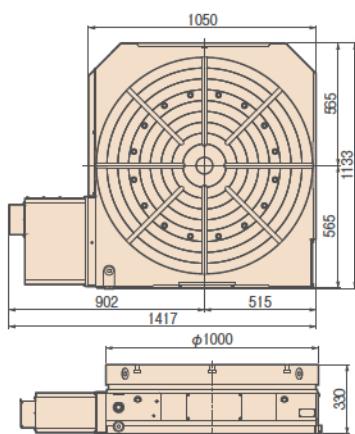**RCH-1000****RTH-911**

Large NC rotary table with a faceplate diameter of 2,000 mm

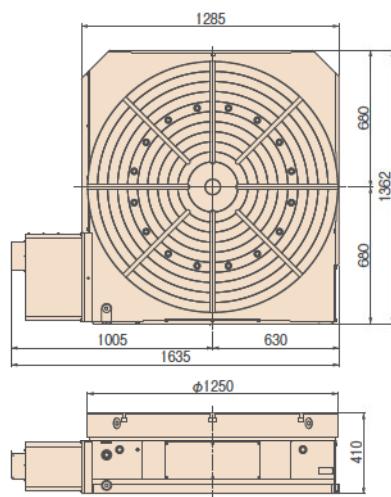**RCH-1250**



Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

**Clamping block and bolt**

Unit: mm

	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
<b>RCH-800</b>	II	4	80 to 400	22	40	20	85	24	20	41	60	27	13	115	80	32	20
<b>RCH-1000</b>	II	4 to 8	80 to 320	22	40	20	85	24	20	41	60	27	13	115	80	32	20
<b>RCH-1250</b>	II	4 to 8	80 to 450	22	50	20	74	20	18	36	70	27	13	130	70	32	20
<b>RNC-1501</b>	IV	4 to 8	80 to 255	28	50	20	74	20	18	36	77	15	17.5	120	70	41.3	24

Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

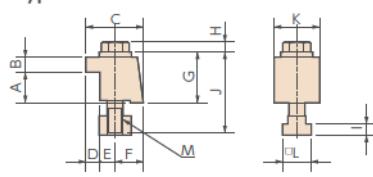**Type II****Type IV****RBS****RBH****Multi-Spindle  
RBM****TBS****RWE/RWA  
RN****RWH****RWA-B  
RNCV-B****RWB****RWB-K  
RNCK****RCB****RCH  
RNC****RCV****Multi-Spindle  
RWM****TWA/TN****TWB  
TTNC****Multi-Spindle  
TWM****RDS****RTV  
RTT****TDS  
TDB****NC Controllers****Accessories****Options****Technical  
Information**

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories


Options

Technical  
Information

## Horizontal motor mounting type

**RCV RCV- 800•1000•  
1250•1600**

Standard model with the motor mounted horizontally onto the side of the body. A powerful hydraulic clamping mechanism is also equipped with this model.

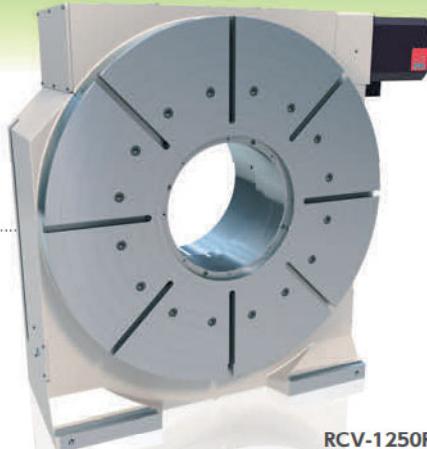

RCV-1250R

## Specifications

Unit: mm

		RCV-800	RCV-1000	RCV-1250	RCV-1600
Handedness	R	○	○	○	○
	L	—	—	—	—
	K	○	○	○	○
Table diameter ( ):option		φ800(φ1,000)	φ1,000(φ1,200)	φ1,250(φ1,500)	φ1,600
Center height		530	625	775	950
Center bore	Nose diameter	φ360H7×45	φ410H7×75	φ500H7×25	φ67H7
	Through-bore	φ310	φ360	φ450	—
Table T-slot width		18H7	22H7	22H7	28H7
Guide block width		22h7	22h7	22h7	22h7
Servo motors (for FANUC)		αiF12	αiF22	αiF22	αiF22
Inertia converted into motor shaft ×10 <sup>-3</sup> kg·m <sup>2</sup>		4.89	8.24	5.04	6.14
Net weight kg		1,350	2,500	4,200	7,200
Speed reduction ratio		1/360	1/360	1/720	1/720
Table max. rpm min <sup>-1</sup> (Motor rpm: 2,000min <sup>-1</sup> )		5.5	5.5	2.7	2.7
Indexing accuracy(the sum) sec		15	15	15	15
Clamp system		Hydraulic or air-hydraulic(Option)	Hydraulic or air-hydraulic(Option)	Hydraulic or air-hydraulic(Option)	Hydraulic
Clamp torque /Hydraulic pressure 3.5Mpa N·m		16,000	20,000	33,000	41,000
Strength of worm gears N·m		7,840	13,230	25,000	25,000
Allowable work weight kg ( ):with tailstock	Vertical setting	2,000 (4,000)	3,500 (7,000)	7,000 (14,000)	10,000 (20,000)
	Horizontal setting	4,000	7,000	14,000	20,000
Allowable load (when table is clamped) N·m	F	100,000	185,000	383,000	754,000
	FxL	16,000	20,000	33,000	41,000
Allowable work inertia J= $\frac{W \cdot D^2}{8}$ kg·m <sup>2</sup>	FxL	11,600	22,900	56,700	153,000
	J= $\frac{W \cdot D^2}{8}$ kg·m <sup>2</sup>	320	874	2,734	6,400

## CE correspondence model


(Tech.info.) Servo motors of other manufacturers P.68

(Option) High-precision Spec. P.64 Air-hydraulic Booster P.67


## Dimensions

Unit: mm


## RCV-800R

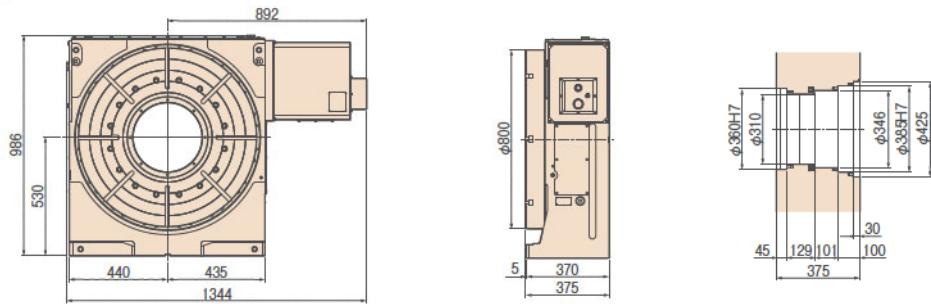

## RCV-1000R

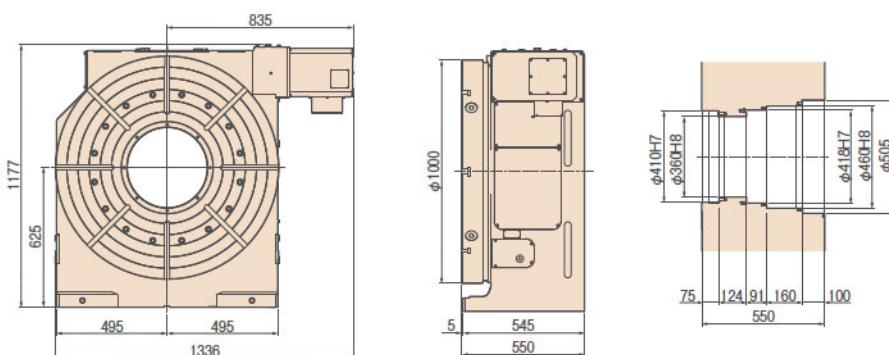

## RCV-1250R

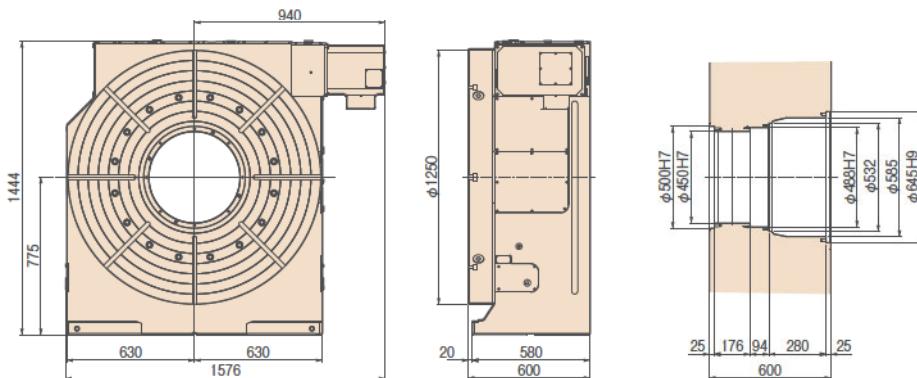

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.


## Clamping block and bolt

Unit: mm


	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RCV-800	II	4	80 to 350	22	60	28	95	29	16	50	88	27	13	145	100	32	20
RCV-1000	II	4	80 to 400	22	60	28	95	29	16	50	88	27	13	145	100	32	20
RCV-1250	II	8	—	22	60	28	95	29	16	50	88	27	13	145	100	32	20
RCV-1600	III	10	—	22													See below

Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Type II



Type III

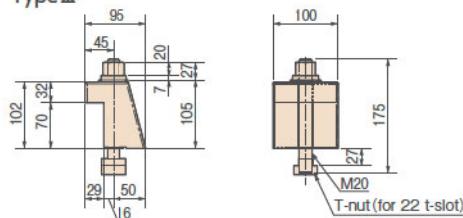

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## Specialty rotary table

Largest Vertical NC Rotary Table

Table diameter :  $\phi$  2,000 mmAllowable work weight : 30 t  
(with support spindle)

Indexing accuracy : 15 sec



## Multi-spindle Type

**RWM****RWM-160-2/3/4****RWM-200-2/3/4****RWM-250-2/3/4****RWM-320-2/3/4**

RWM-160R-2,PS

High-productivity model for multi-piece/multi-face machining. The RWM-160, the smallest of the RN-series, assures the fastest operation and meets the requirements for drilling and tapping machines.

## Specifications

Unit: mm

		RWM-160			RWM-200			RWM-250			RWM-320		
RWB-K RNCK	Handedness	R	○		○		○		○		○		
		L	○		○		○		○		○		
RCB	Spindle diameter		$\phi 100\text{h7}$		$\phi 120\text{h7}$		$\phi 140\text{h7}$		$\phi 180\text{h7}$				
RCH RNC	Table diameter		$\phi 160, \phi 200$ (Option)		$\phi 200, \phi 250$ (Option)		$\phi 250$ (Option)		$\phi 320$ (Option)				
RCV	Distance between spindles		215 or 250		250 or 320		320 or 400		400 or 500				
Multi-Spindle RWM	Center height		135		160		160		210				
	Center bore	Nose diameter	$\phi 55\text{H7}$		$\phi 65\text{H7}$		$\phi 80\text{H7}$		$\phi 115\text{H7}$				
TWA/TN	Through-bore		$\phi 40$		$\phi 45$		$\phi 50$		$\phi 85$				
TWB TTNC	Guide block width		$14\text{h7}$		$18\text{h7}$		$18\text{h7}$		$18\text{h7}$				
Multi-Spindle TWM	Servo motors (for FANUC)		$\alpha iF4$		$\alpha iF8$		$\alpha iF8$		$\alpha iF8$				
	Number of axis	2-axis	3-axis	4-axis	2-axis	3-axis	4-axis	2-axis	3-axis	4-axis	2-axis	3-axis	4-axis
RDS	Inertia converted into motor shaft $\times 10^{-3}\text{kg}\cdot\text{m}^2$ (When spindle pitch is minimum)	0.31	0.43	0.56	0.46	0.64	0.85	0.55	0.82	1.09	1.07	1.61	2.15
	Net weight (When spindle pitch is minimum) kg	105	150	200	155	225	295	210	310	435	380	600	880
RTV RTT	Speed reduction ratio	1/72			1/72			1/120			1/120		
	Table max. rpm min <sup>-1</sup> (Motor rpm: 3,000min <sup>-1</sup> )	41.6			41.6			16.6			16.6		
TDS TDB	Clamp system	Pneumatic			Pneumatic			Pneumatic			Pneumatic		
	Clamp torque /pneumatic pressure 0.49MPa N·m	500			800			1,000			1,500		
NC Controllers	Indexing accuracy (the sum) sec	25			20			20			20		
	Strength of worm gears N·m	206			288			596			939		
Options	Allowable work weight Vertical setting kg/axis ( ): with tailstock	100 (200)			125 (250)			125 (250)			175 (350)		
	F N	10,800			14,400			14,400			24,800		
Technical Information	Allowable load (when table is clamped) FxL N·m	500			800			1,000			1,500		
	FxL N·m	780			1,900			1,900			4,700		
Allowable work inertia (per single-axis) $J = \frac{W \cdot D^2}{8}$		0.64			1.25			1.95			4.48		




CE correspondence model

(Tech.info.) Servo motors of other manufacturers P.68




(Option) Rotary Joint P.66

## Dimensions




Unit: mm

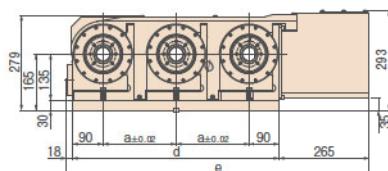**RWM-160R-2/3/4**






	a	b	c	d	e	f	g
PS	215	395	623	610	893	825	1,108
PL	250	430	658	680	963	930	1,213

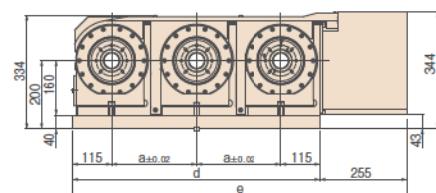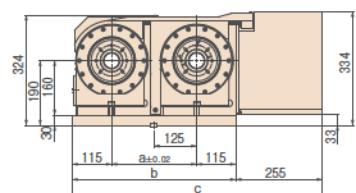**RWM-200R-2/3/4**

	a	b	c	d	e	f	g
PS	250	480	735	730	985	980	1,235
PL	320	550	805	870	1,125	1,190	1,445

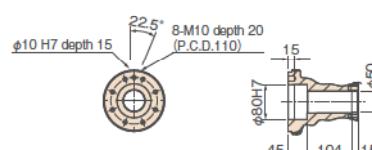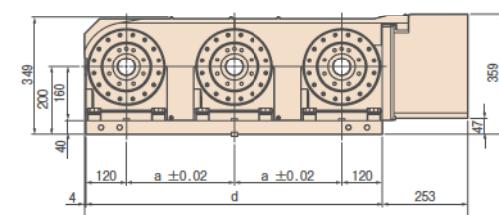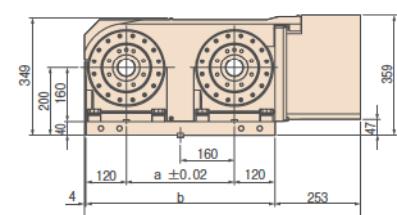**RWM-250R-2/3/4**

	a	b	c	d	e	f	g
PS	320	560	817	880	1,137	1,200	1,457
PL	400	640	897	1,040	1,297	1,440	1,697

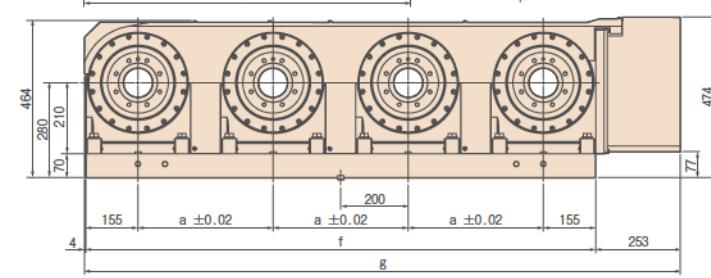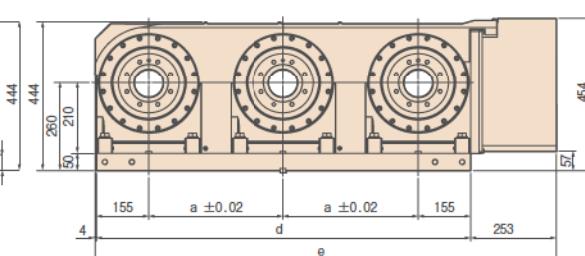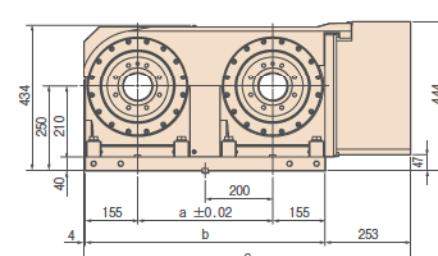**RWM-320R-2/3/4**

	a	b	c	d	e	f	g
PS	400	710	967	1,110	1,367	1,510	1,767
PL	500	810	1,067	1,310	1,567	1,810	2,067

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

RBS

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

Standard type

# TWA/TN

**TWA-100•130•160•200  
TN-320•450**

Compact tables for speedy and powerful five-axis machining.  
TWA-100 and TWA-130 are the most suitable models for drilling and tapping machines.



TWA-130

## Specifications

Unit: mm

	<b>TWA-100</b>	<b>TWA-130</b>	<b>TWA-160</b>	<b>TWA-200</b>	<b>TN-320</b>	<b>TN-450</b>
Tilt range	-17° to +107°	-17° to +107°	-30° to +110°	-30° to +110°	-30° to +110°	-10° to +95°
Spindle diameter	φ86h7	φ90h7	φ100h7	φ120h7	—	—
Table diameter	φ135 (Option)	φ135 (Option)	φ160 or 200 (Option)	φ200 or 250 (Option)	φ320	φ450
Table height at 0° position	180 (205 w/face plate)	210 (235 w/face plate)	235 (260 w/face plate)	270 (300 w/face plate)	355	425
Center height at 90° position	135	150	180	210	255	425
Center bore	Nose diameter (φ40H7 w/face plate)	φ55H7 (φ40H7 w/face plate)	φ55H7 (φ50H7 w/face plate)	φ65H7 (φ60H7 w/face plate)	φ105H7	φ170H7
Through-bore	φ35	φ37	φ40	φ45	φ102	φ136
Table T-slot width	12H8 (w/face plate)	12H8 (w/face plate)	12H8 (w/face plate)	12H8 (w/face plate)	14H7	14H7
Guide block width	14 h 7	14 h 7	18 h 7	18 h 7	18 h 7	18 h 7
Servo motors (for FANUC)	Rotary axis αiS2	Tilt axis αiS2	Rotary axis αiS2	Tilt axis αiS2	Rotary axis αiF4	Tilt axis αiF4
Inertia converted into motor shaft $\times 10^{-3} \text{kg}\cdot\text{m}^2$	0.072	0.078	0.074	0.072	0.17	0.38
Speed reduction ratio	1/60	1/120	1/60	1/120	1/72	1/120
Table max. rpm (Motor rpm: 2,000min⁻¹)	41.6 (Motor rpm: 2,500min⁻¹)	16.6	41.6 (Motor rpm: 2,500min⁻¹)	16.6	27.7	16.6
Clamp system Supplied pressure	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Clamp torque /pneumatic pressure 0.49MPa-hydraulic pressure 3.5MPa N·m	200	300	500	500	800	800
Indexing accuracy (the sum) arc sec	40	—	40	—	30	—
Tilting accuracy Tilt 0° to 90° arc sec	—	45	—	45	—	45
Net weight kg	75	85	135	195	440	1,200
Strength of worm gears (Rotary axis) N·m	152	152	200	450	931	1,940
Allowable work weight 0° (Horizontal) kg	35	35	60	120	150	500
Allowable work weight 0° to 90° (Tilting) kg	20	20	40	70	100	300
Allowable work moment W×L N·m	24	24	39.2	53.7	163.3	288.2
Allowable load F N	3,920	3,920	7,840	13,720	19,600	39,200
Allowable load F×L N·m	200	500	500	800	2,200	3,700
Allowable load F×L N·m	300	500	800	1,000	2,200	7,400
Allowable work inertia $J = \frac{W \cdot D^2}{8}$ kg·m²	0.08	0.08	0.19	0.59	1.53	9.38

CE correspondence model (excluding TN)

(Tech.Info.) Servo motors of other manufacturers P.68

When assembling a faceplate or a fixture with the main spindle P.79
















(Option) High-precision Spec. P.64

Pull Stud P.66




Rotary Joint P.66

## Dimensions

Unit: mm

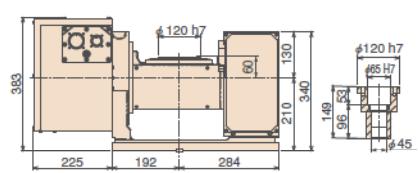**TWA-100****TWA-130****TWA-160****TWA-200****TN-320**

TN-450

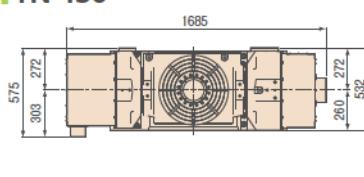**TN-450**

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

**Clamping block and bolt**

Unit: mm

Type	Q'ty	Layout	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M	
TWA-100	I	4	a b	40 to 160 *	14	20	12	70	10	35	25	20	12	8	50	35	23	12
TWA-130	I	4	a b	40 to 190 *	14	20	12	70	10	35	25	20	17	8	55	35	23	12
TWA-160	I	4	a b	78 to 150 63 to 117	18	20	12	70	10	35	25	17	15	11	55	35	28	16
TWA-200	I	4	a b	80 to 180 78 to 125	18	25	12	80	12	33	35	22	21	11	65	40	28	16
TN-320	I	4	a b	140 to 190 95 to 180	18	25	12	80	12	33	35	22	21	11	65	40	28	16
TN-450	IV	4	a b	80 to 250 *	18	50	20	74	20	18	36	75	10	11	105	70	28	16

Note 1: \*In the case of layout b, contact us for the details about mounting.

Note 2: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)


Layout a




Layout b



Type I



Type IV

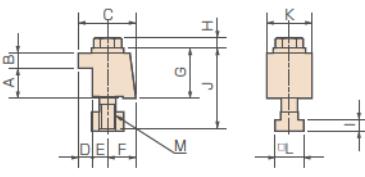


Standard type

# **TWB**

## **TWB-320・630・1000**

# **TTNC**

## **TTNC-1500**

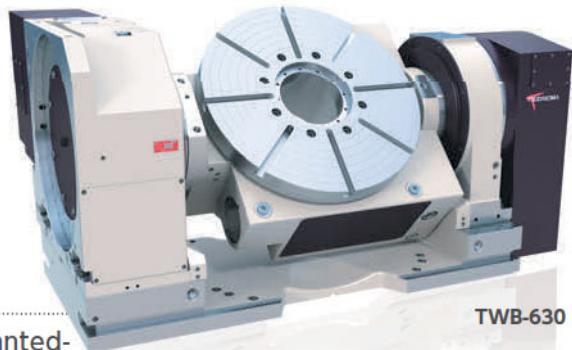

TWB-630

Large tilting models that enable 5-face machining and slanted-hole machining with single chucking of workpiece. Suitable for machining of component parts for heavy industries such as aircraft, power generator and construction machine industry.

## Specifications

Unit: mm

RWB		<b>TWB-320</b>	<b>TWB-630</b>	<b>TWB-1000</b>	<b>TTNC-1500*</b>
<b>RWB-K RNCK</b>	Tilt range	−30° to +110°	−110° to +110°	−30° to +110°	−5° to +95°
<b>RCB</b>	Table diameter	φ320	φ630	φ1,000	φ1,500
<b>RCH RNC</b>	Table height at 0° position	355	585	650	1,155
<b>RCV</b>	Center height at 90° position	255	450	650	1,055
<b>RWM</b>	Center bore	Nose diameter Through-bore	φ105H7 φ80	φ220H7 φ181	φ360H7 φ310
<b>TWA/TN</b>	Table T-slot width	14H7	18H7	18H7	28H7
<b>TWB TTNC</b>	Guide block width	18h7	18h7	—	—
<b>TWM</b>	Servo motors (for FANUC)	Rotary axis αiF8	Tilt axis αiF12	Rotary axis αiF12	Tilt axis αiF12
<b>RDS</b>	Inertia converted into motor shaft	×10 <sup>3</sup> kg·m <sup>2</sup>	1.8	2.95	3.45
<b>RTV RTT</b>	Speed reduction ratio	1/90	1/120	1/180	1/360
<b>TDS TDB</b>	Table max. rpm min <sup>-1</sup>	22.2 (Motor rpm: 2,000min <sup>-1</sup> )	16.6	16.6 (Motor rpm: 3,000min <sup>-1</sup> )	8.3 (Motor rpm: 3,000min <sup>-1</sup> )
<b>NC Controllers</b>	Clamp system Supplied pressure	Hydraulic or air-hydraulic (Option)	Hydraulic or air-hydraulic (Option)	Hydraulic or air-hydraulic (Option)	Hydraulic or air-hydraulic (Option)
<b>Accessories</b>	Clamp torque N·m	2,200(3.5MPa) 3,000(4.9MPa)	3,100(3.5MPa) 4,700(4.9MPa)	7,600 (3.5MPa)	13,100 (3.5MPa)
<b>Options</b>	Indexing accuracy(the sum) arc sec	20	—	15	—
<b>Technical Information</b>	Tilting accuracy Tilt 0° to 90° arc sec	—	60	—	60
	Net weight kg	470	1,750	6,000	12,000
	Strength of worm gears (Rotary axis) N·m	1,011	5,601	7,840	21,560
	Allowable work weight 0° (Horizontal) kg	350	1,000	4,000	2,500
	Allowable work weight 0° to 90° (Tilting) kg	175	500	2,000	1,500
	Allowable work moment W×L N·m	190	2,000	5,360	7,840
	Allowable load (when table is clamped) F N·m	35,000	34,000	100,000	49,000
	Allowable load (when table is clamped) F×L N·m	2,200(3.5MPa) 3,000(4.9MPa)	7,600	16,000	12,000
	Allowable work inertia J= $\frac{W \cdot D^2}{8}$ kg·m <sup>2</sup>	2	50	320	2,255

## CE correspondence model(excluding TTNC)

\* 1 Above specifications are for one of experienced production. Those might be changed depending on use conditions.

Servo motors of other manufacturers **P.68**


Option

High-precision Spec. **P.64**  
Rotary Joint **P.66**



Pull Stud **P.66**  
Air-hydraulic Booster **P.67**

## Dimensions



Unit: mm

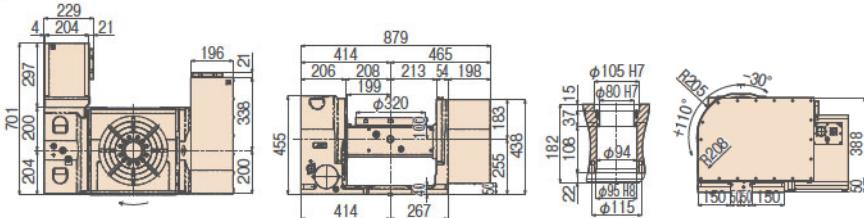**TWB-320**


TWB-320

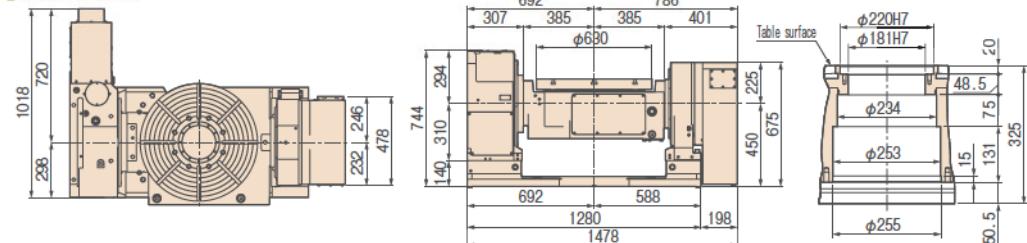**TWB-630**

TWB-630

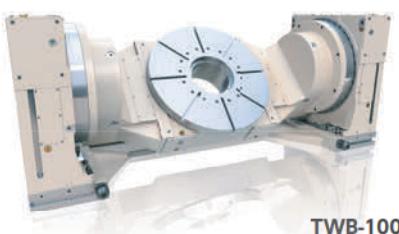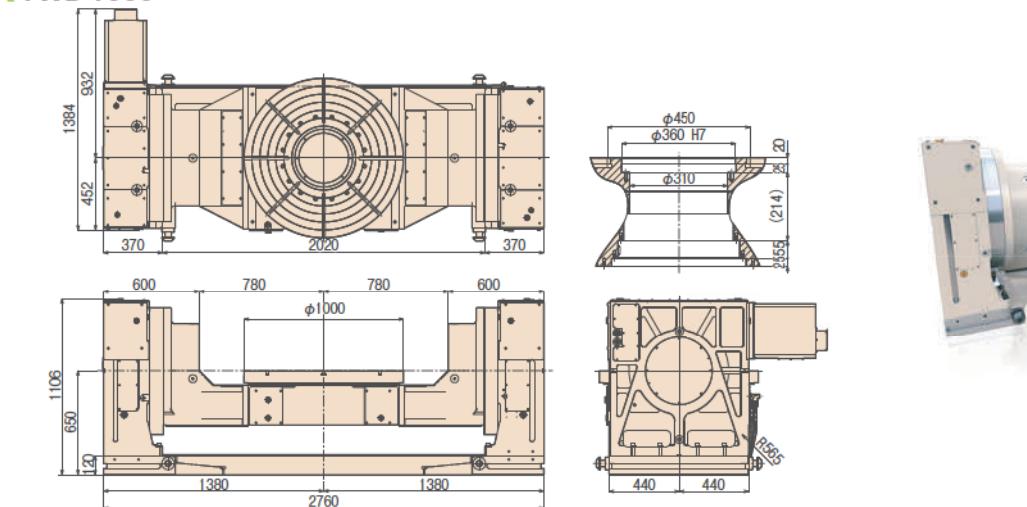**TWB-1000**

TWB-1000

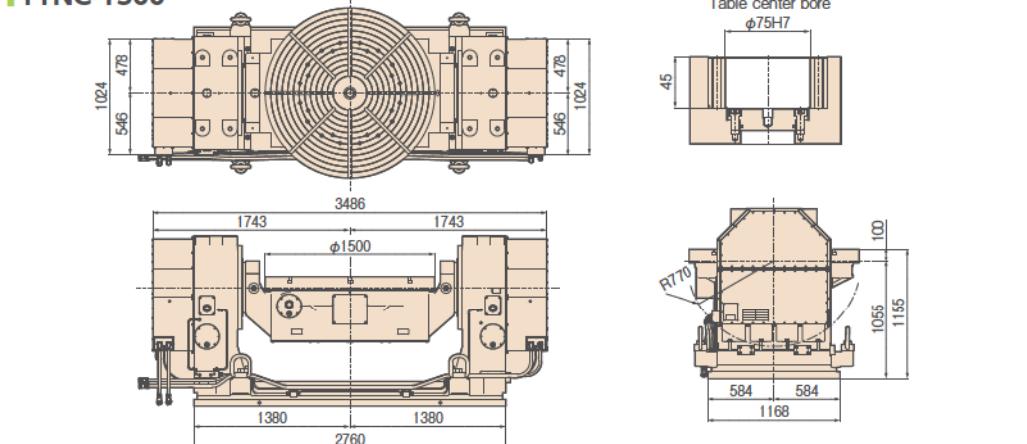
**TTNC-1500**

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

## Clamping block and bolt

	Type	Q'ty	Layout	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
TWB-320	I	4	a b	140 to 190 70 to 150	18	25	12	80	12	33	35	22	21	11	65	40	28	16
TWB-630	I	4	a b	168 to 450 80 to 267	18	40	20	110	18	42	50	25	21	11	70	46	28	16
TWB-1000	IV	8	—	—	24	40	18	63	18	15	30	58	20	14	105	60	38.2	20
TTNC-1500	II	10	—	—	28	60	28	95	29	16	50	95	22	17.5	146	100	41.3	24

Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

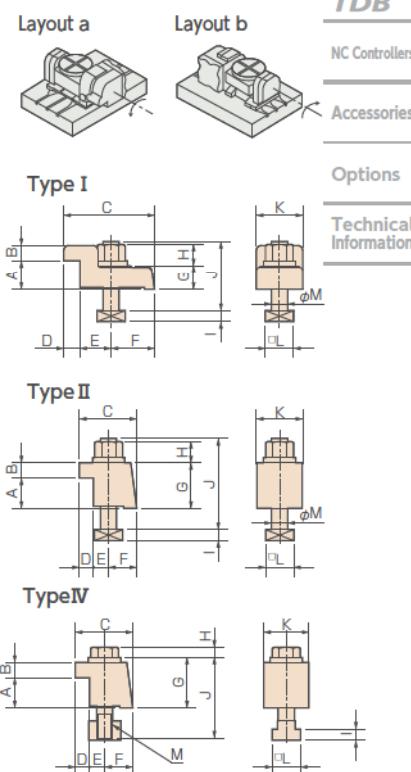

## Multi-spindle Type

**TWM****TWM-100•160•250**

Tilt type multi-spindle enables highly productive machining.  
Simultaneous machining of multiple workpieces with complex shapes and 5-face machining is possible.



TWM-160, PS

## Specifications

Unit: mm

		<b>TWM-100,PS</b>	<b>TWM-160</b>	<b>TWM-250</b>	
<b>RWA-B</b>	Tilt range	−17° to +107°	−30° to +110°	−30° to +110°	
<b>RNCV-B</b>	Spindle diameter	φ90h7	φ100h7	φ140h7	
<b>RWB</b>	Table diameter	φ135 (Option)	φ160 or φ200 (Option)	φ250 (Option)	
<b>RWB-K</b>	Distance between spindles	140	250 or 320	320 or 400	
<b>RNCK</b>	Table height at 0° position	220 (245 w/face plate)	250 (280 w/face plate)	325 (355 w/face plate)	
<b>RCB</b>	Center height at 90° position	160	190	260	
<b>RCH</b>	Center bore	Nose diameter	φ55H7	φ80H7	
		Through-bore	φ40	φ50	
<b>RNC</b>	Guide block width	14h7	18h7	18h7	
<b>RCV</b>	Servo motors (for FANUC)	Rotary axis	Tilt axis	Rotary axis	Tilt axis
	Inertia converted into motor shaft $\times 10^{-3} \text{kg}\cdot\text{m}^2$	αiF2	αiF2	αiF4	αiF8
	Speed reduction ratio	0.13	0.14	0.52	0.50
<b>RWM</b>	Table max. rpm $\text{min}^{-1}$ (Motor rpm: 3,000min $^{-1}$ )	1/60	1/120	1/60	1/90
<b>TWA/TN</b>	Clamp system Supplied pressure	50	25	50	33.3
<b>TWB</b>	Clamp torque N·m	Pneumatic 0.49MPa	Pneumatic 0.49MPa	Pneumatic 0.49MPa	Pneumatic 0.49MPa
<b>TTNC</b>	Clamp torque N·m	200	500	500	1,000
<b>TWM</b>	Indexing accuracy(the sum) arc sec	40	—	30	—
<b>RDS</b>	Tilting accuracy Tilt 0° to 90° arc sec	—	45	—	60
	Tilt −30° to 90° arc sec	—	—	75	—
<b>RTV</b>	Net weight kg	110	240 (PS) 260 (PL)	550 (PS) 595 (PL)	
	Strength of worm gears (Rotary axis) N·m				
<b>RTT</b>	0° (Horizontal) kg/axis	35	40	100	
	Allowable work weight 0° to 90° (Tilting) kg/axis	20	40	100	
<b>TDS</b>	Allowable work moment W×L N·m	24	55.8	347.4	
	F N	3,920	10,800	14,400	
<b>TDB</b>	Allowable load (when table is clamped) F×L N·m	200	500	1,000	
	F×L F N	500	1,000	3,100	
<b>NC Controllers</b>	Allowable work inertia (per single-axis) $J = \frac{W \cdot D^2}{8}$ kg·m $^2$	0.05	0.13	0.9	
<b>Accessories</b>					
<b>Options</b>					
<b>Technical Information</b>					






## CE correspondence model

(Tech.info.) Servo motors of other manufacturers P.68

(Option) Rotary Joint P.66

## Dimensions

Unit: mm

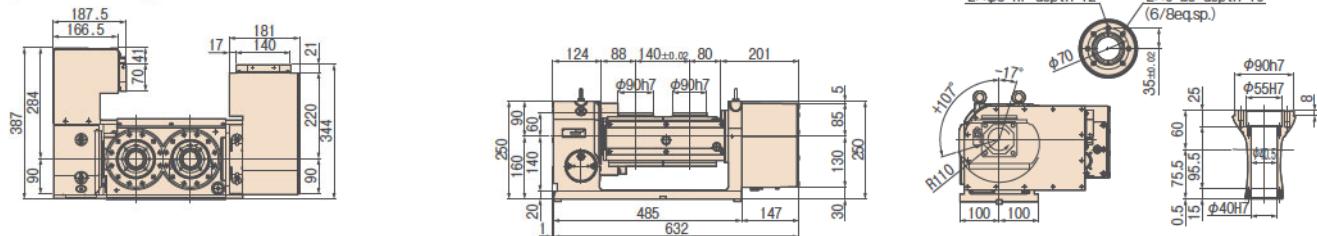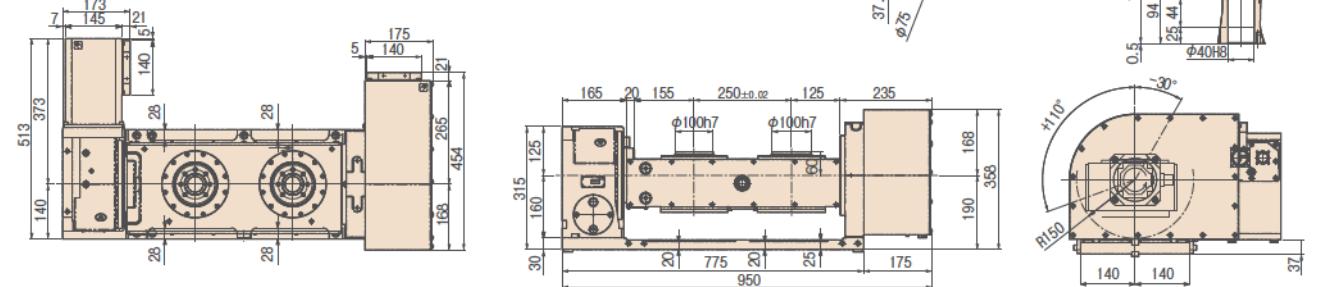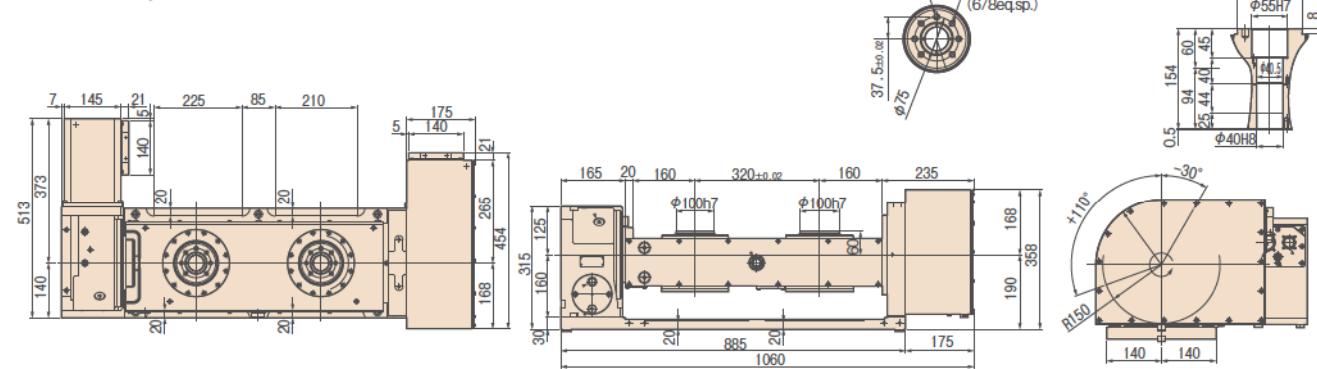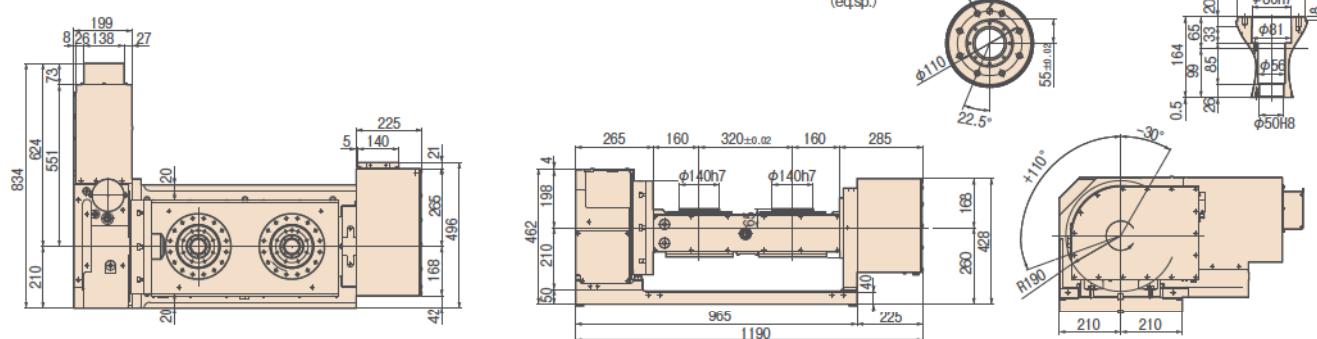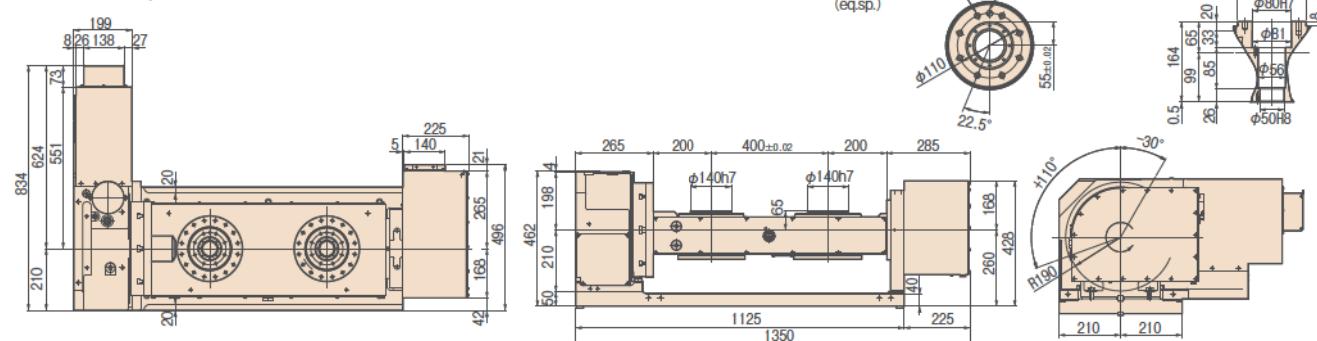**TWM-100,PS****TWM-160,PS****TWM-160,PL****TWM-250,PS****TWM-250,PL**

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

# RDS RDS-200

Smart slim body provides full use of machining area with various features of DD motor including high speed rotation. This is the best model for mass-production of automobile and computer parts at small machining centers. Additional axis control is possible with FANUC and Mitsubishi-controlled machines.

The RDS dedicated single axis controller (TPC-DD\*) can be used with the M signal of the machining center.



RDS-200

## Specifications

Init: mm

		RDS-200
Spindle diameter	mm	φ83
Center height	mm	160
Center bore	Nose diameter	φ55
	Through-bore	φ45
Motor type		TSUDA-02
Net weight	kg	65
Speed reduction ratio		1/1
Indexing accuracy(the sum)	sec	20※
Clamp system		Pneumatic
Clamp torque /pneumatic pressure 0.49MPa	N·m	600
Clamp torque /Pneumatic pressure interception	N·m	40
Table max. rpm	Steady rotation	min <sup>-1</sup>
	Max rotation	min <sup>-1</sup>
Allowable work weight	kg	100
		6,860
Allowable load (when table is clamped)	F×L	N·m
		600
		350

## CE correspondence model


\*Pitch error corrected

\*Please contact us for more information about TPC-DD.

## Dimensions

| Init-mm

| RDS-200

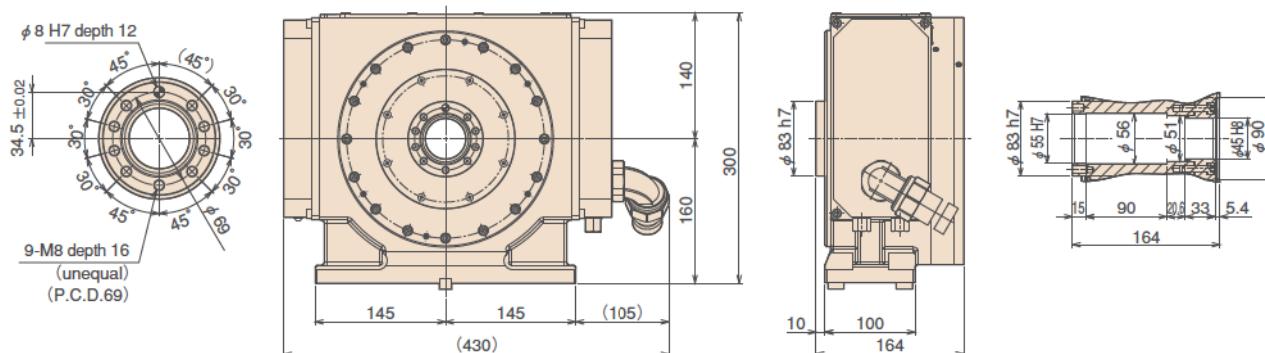

Specialty rotary table

**RTV·RTT****RTV-202  
RTT-112**

DD (Direct Drive) motors realize high speed, high acceleration and no backlash operation.

Most suitable for high speed and high quality machining for various impellers, blades and medical equipment, and for high speed indexing operation for automotive parts.

We provide optimum ideas of products and various applications based on our great experiences.

## Specifications

Unit: mm

		RTV-202	RTT-112
Controll axis		1-axis	2-axis
Table diameter (Spindle diameter)	mm	Vertical setting only ( $\phi 120$ )	Rotary axis $\phi 100$
Servo motors (for FANUC)		Dis260/300	Dis60/400
Type of scale		$\alpha iCZ512A$	$\alpha iCZ512A$
Table max. rpm	$min^{-1}$	150	150
Clamp torque	N·m	300 (Pneumatic pressure 0.49MPa)	—
Center height	mm	190	280
Rotary joint		—	—
Allowable work weight	kg	50	30
Net weight	kg	90	190

\* Contact us for the following models.  
 Vertical type DD Table       $\phi 100$  to  $\phi 500$   
 Tilting type DD Table       $\phi 100$  to  $\phi 630$

\* Applicable for various kinds of DD motors which depend upon the type of controllers. Contact us for details.




RTV-202


## Dimensions

Unit:mm

## RTV-202

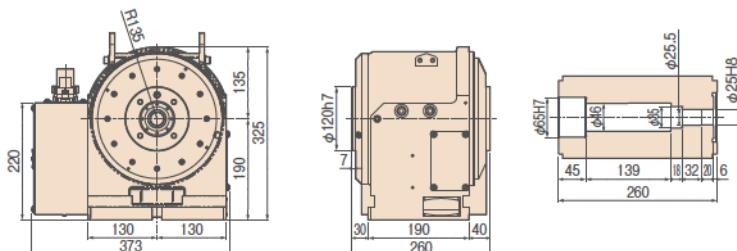

## RTT-112

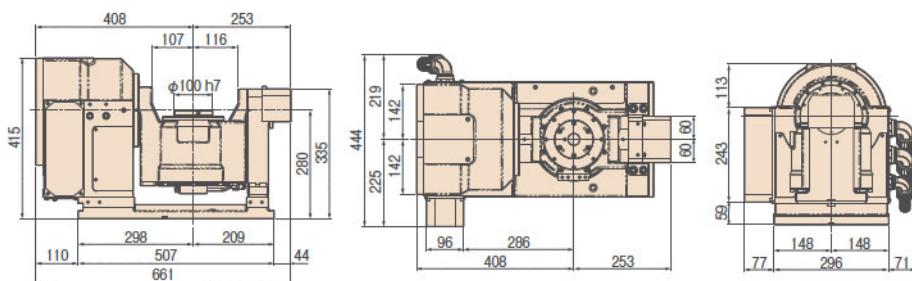

RTT-112

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

# Direct Drive NC Tilting Rotary Tables

Milling and Turning Model

## TDS TDS-200 TDB TDB-200

Achieves both turning at a maximum of 3,000 min<sup>-1</sup> and milling by positioning in one chucking. Contributes to labor savings, automation, and improved processing efficiency.



TDS-200

### Specifications

Unit: mm

	TDS-200		TDB-200R,F	
Tilt range	−100° to +10°		−100° to +10°	
Table diameter	φ90		φ90	
Table height at 0° position	325		325	
Center height at 90° position	225		225	
Center bore	Nose diameter	φ20	φ20	
	Through-bore	—	—	
Motor type	Rotary axis TSUDA-01		Rotary axis TSUDA-01	Tilt axis (BallDrive)
Type of scale	αiCZ512A		αiCZ512A	αis4
Speed reduction ratio	1/1		1/1	1/60
Table max. rpm	min <sup>-1</sup>	3,000	100	3,000 (Motor rpm:3,000 min <sup>-1</sup> )
Clamp system	Pneumatic			
Clamp torque /pneumatic pressure 0.49MPa	N·m	400	500	400
Net weight	kg	195		180
Allowable work weight	0° (Horizontal) 	kg/axis	50	50
	0° to 90° (Tilting) 	kg/axis	50	50
Allowable work moment	W×L 	N·m	—	57
	F 	N	2,940	2,940
Allowable load (when table is clamped)	F×L 	N·m	400	400
	F×L 	N·m	500	500
Allowable work inertia	$J = \frac{W \cdot D^2}{8}$ 	kg·m <sup>2</sup>	0.3	0.3


CE correspondence model

Note: Customers are required to prepare oil cooling unit for installation.




TDB-200R,F

| TDS-200

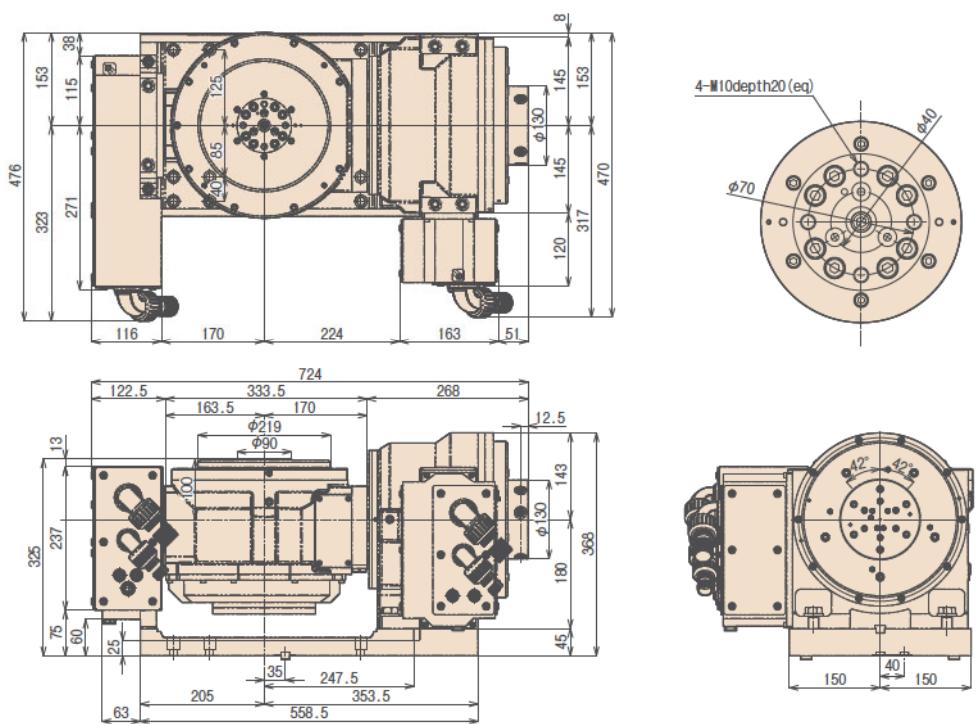

| TDB-200R,F

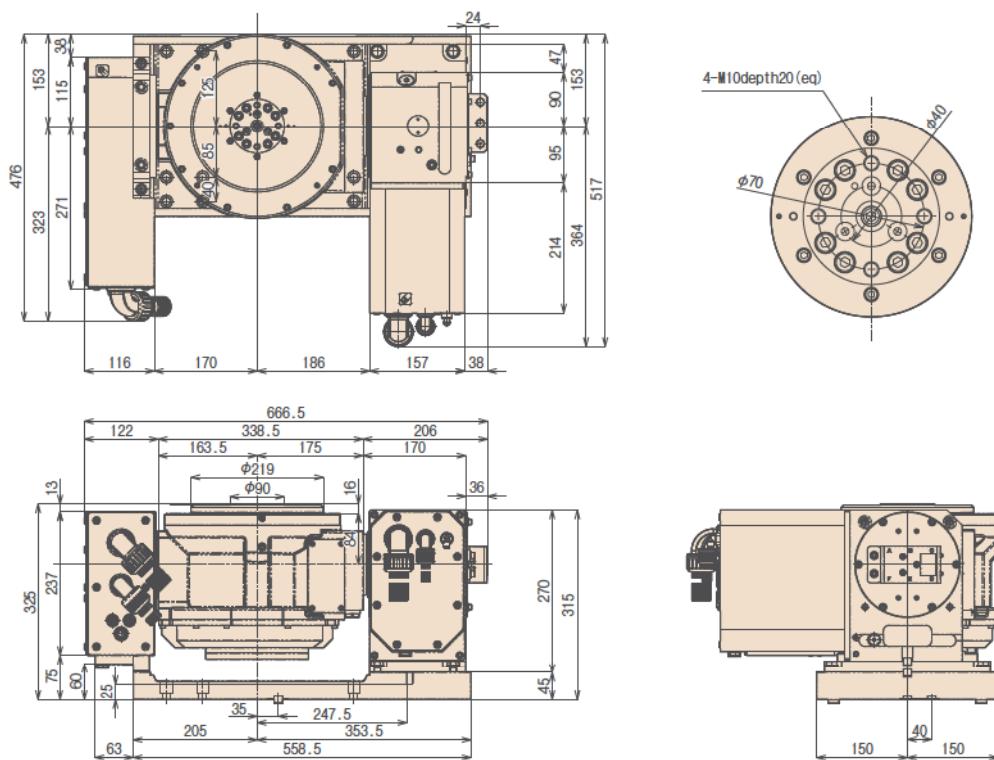

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

**RBS****RBH****Multi-Spindle  
RBM****TBS****RWE/RWA  
RN****RWH****RWA-B  
RNCV-B****RWB****RWB-K  
RNCK****RCB****RCH  
RNC****RCV****Multi-Spindle  
RWM****TWA/TN****TWB  
TTNC****Multi-Spindle  
TWM****RDS****RTV  
RTT****TDS  
TDB****NC Controllers****Accessories****Options****Technical  
Information**

## Single axis NC controllers equipped with advanced functions for M-signal

Single axis NC table controllers that operate by means of M-signals from the machining center. Operation can be programmed by machining center under "Remote mode + M" specification.

For small-sized rotary tables

### **TPC-Jr K2/K3**



Single axis NC controllers that operate small-sized TSUDAKOMA NC rotary tables by means of M-signals from machining center.

TSUDAKOMA rotary tables equipped with super-compact AC servo motors are the most compact among similar models.

Operation can be programmed by machining center.

**With "Remote mode + M" specification**

(Parameter change) P.52


\*Corresponding to Cable option

#### Applicable models

	K2	K3
RN-100	●	
RWE/RWA-160	●	
RWE/RWA-200		●
RWA-250*		●
RWA-320*		●
TWA-100	●	
TWA-130	●	
TWA-160	●	
TWA-200		●
TWM-100*	●	
TWM-160*		●
TBS-130	●	
TBS-160	●(R)	●(T)
TDB-200		●(T)


\* Table maximum rotation speed is limited.

#### Dimensions


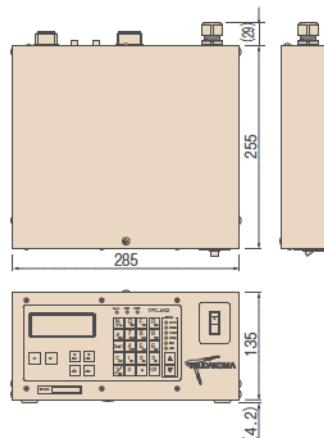


#### Cables


3P plug (with earth)  
Single phase 200V/220V



Interlocking connector  
(To a machining tool)



**TPC-Jr**

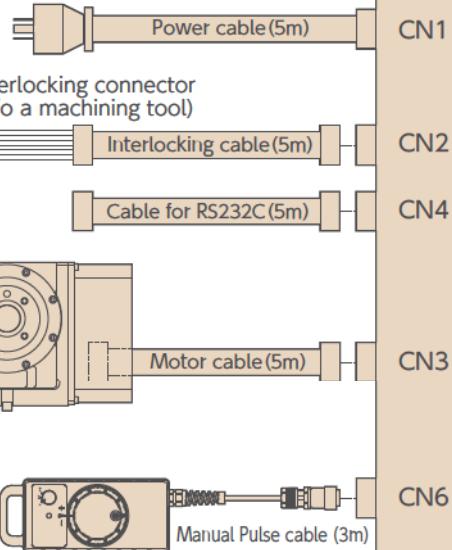

Note: The cable for RS232C is an optional item.  
Note: Manual pulse generator is an optional item.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

# TPC-Jr FUNCTIONS



## OPERATION MODE

- AUTO** AUTO : Automatic operation by an M signal from the machining center.
- SINGLE** SINGLE : Single operation of TPC-Jr. By pressing **ST**, positioning is performed once.
- CHECK** CHECK : Block number call, program check and self-diagnosis.
- PROG** Program mode : For inputting and editing the program.
- MDI** MDI mode : For setup operation. Ten blocks of programs can be carried out.
- JOG** JOG mode : For manual feed and step feed.
- HANDLE** Handle mode : Manual pulse operation.

## Program edit keys

- N** w No. Workpiece No. (Program No.) 0000 to 9999  
100 programs registerable
- N** w No. Block No. 000 to 999
- G** PRO Operation command G0 to G4: Movement command  
G5 to G9: Assistance function
- F** FOS Feed rate select command F0: Rapid positioning speed  
F1 to F9: Cutting feed rate
- R** ADM Assistance code for codes
- θ** DGN Travel distance command (angle, divided number)  
Block No./Sub-program No.

G-code		R-code		θ -code	
No.	Command	No.	Command	Command	Setting
G0	Direct angle command	001 to 999	Number of Repetition (INC command)	Command angle	±000.001° to 999.999°
		000	(ABS command)	Command angle	±000.000° to 360.000°
G1	Direct indexing number command	001 to 999	Number of repetitions	Number of divisions for 360°	±1 to 999999div.
G2	Arc-indexing number command	001 to 999	Number of divisions, Number of repetitions	Arc-angle indexed	±000.001° to 360.000°
G3	Lead cutting command	000 to 100	Number of table rotations	Command angle	±0° to 360.000°
G4	Zero point return command	000	1st zero point return (mechanical zero point)	Not required	
		001	2nd zero point return		
		002	3rd zero point return		
G5	Sub-program call command	001 to 999	Number of repetitions	Sub-program No.	0000 to 9999
G6	Subprogram return command		Not required		Not required
G7	Program end command		Not required	Target address	000 to 999
G8	Workpiece coordinate system setting command		Not required	Reference coordinate	±0° to 360.000°
G9	Declaration command	000	No operation	Not required	
		001/002	Clamp OFF/ON		
		003/004	Dowel OFF/ON	Dwell time	000 to 999 (×10m sec)
		005/006	Indexing group control OFF/ON	Not required	
		007/008	Directional positioning OFF/ON		
		009/010	Completion signal control command OFF/ON	Completion signal selection	
		011	Program display selection command	Not required	
		012	Current position display selection command		
		013	Remaining angle display selection command		

# Single-axis NC Controllers

For large-sized tables

## TPC5 SR6/SR12/SR30

Single axis NC controllers automatically start large-sized TSUDAKOMA NC rotary tables by receiving M-signals from machining center.

Easy programming by simple input of the interactive system.

In increments of 0.001° (standard), 0.0001° or 1 sec.

Ready to set optional functions easily.

- With an optional function of B signal, the workpiece number, block number and tilting angle command can be entered from machining center.

- Operation can be programmed by machining center.  
**With "remote mode + M" specification**

(Parameter change) P.52

※Corresponding to Cable option



MDI unit



TPC5 control unit


### Applicable models

	SR6	SR12	SR30
RWB-250	●		
RWB-320,400,500		●	
RWM-160	●		
RWM-200/250/320-2	●		
RCH/RCV-800		●	
RCH/RCV-1000,1250			●
RCV-1600		●	●
RNC-2001,1501			●
TN-320	●		
TN-450			●
TWB-320	●(R)	●(T)	
TWB-630		●	
TWM-250*	●(R)	●(T)	
RBS/RBH-160	●		
RBS/RBH-250	●		
RBS/RBH-320			●
RBM-160 *	●		
TBS-250	●		


\* Table maximum rotation speed is limited.

RBH requires special TPC5.

### Cables

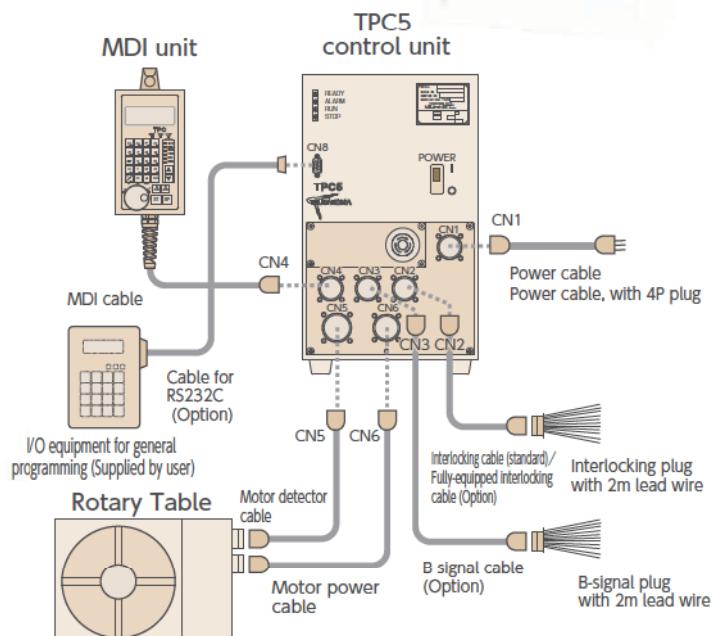

### Dimensions

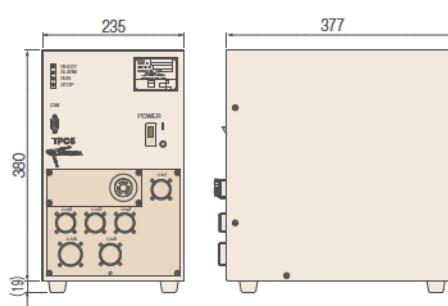

# TPC5 FUNCTIONS

## Operation panel



## OPERATION MODE

- **AUTO** AUTO : Automatic operation interlocked with machining center
- **SINGLE** SINGLE : Single operation of TPC5
- **CHECK** CHECK : Program check and self-diagnosis
- **PROG** PROG : Program mode : Program entry
- **MDI** MDI mode : Setup operation
- **HANDLE** HANDLE mode : Manual pulse operation/jog mode

### Indicator

Indicator  
 RDY W0000 S9999 ABS  
 N000 GO F0 R0000  
 (5)POS θ+000° 00'00"  
 OT OVR150% MZRN

← Status display line  
 ← Program display line  
 ← Program/Current position  
 ← Control display line

### Status display line:

① TPC status ② Workpiece number  
 ③ Subprogram number  
 ④ Command system

### Program display line:

TPC5 program in 2 lines  
 ⑤ Current position/remaining (POS/REM)

### Control display line:

⑥ Overtravel  
 ⑦ Override/machine lock/manual interrupt  
 ⑧ Zero point return MZRN/WZRN/TZRN

## Program edit keys

**N** + **W No.** Workpiece No. (Program No.)  
 0000 to 9999  
 100 programs registerable

**N** Block No. 000 to 999

**G** Operation command  
 G0 to G4 : Movement command  
 G5 to G9 : Assistance function

**F** Feed rate select command  
 F0 : Rapid positioning speed  
 F1 to F9 : Cutting feed rate

**R** Assistance code for codes

**θ** Travel distance command  
 (angle, divided number)

G-code		R-code		θ -code	
No.	Command	No.	Command	Command	Setting
G0	Direct angle command	0001 to 9999	Number of Repetition (INC command)	Command angle	±000.001° to 999.999°
		0000	(ABS command)	Command angle	±000.000° to 360.000°
G1	Direct indexing number command	0001 to 9999	Number of repetitions	Number of divisions for 360°	±1 to 999999div.
G2	Arc-indexing number command	0001 to 9999	Number of divisions, Number of repetitions	Arc-angle indexed	±000.001° to 360.000°
G3	Lead cutting command	0000 to 0100	Number of table rotations	Command angle	±0° to 360.000°
G4	Zero point return command	0000	1st zero point return (mechanical zero point)	Not required	
		0001	2nd zero point return		
		0002	3rd zero point return		
G5	Sub-program call command	0000 to 9999	Number of repetitions	Sub-program No.	0000(0001) to 9999
G6	Subprogram return command		Not required		Not required
G7	Program end command		Not required	Target address	000 to 999
G8	Workpiece coordinate system setting command		Not required	Reference coordinate	±0° to 360.000°
G9	Declaration command	0000	No operation	Not required	
		0001/0002	Clamp OFF/ON		
		0003/0004	Dowel OFF/ON	Dwell time	001 to 999 (×10m sec)
		0005/0006	Indexing group control OFF/ON		Not required
		0007/0008	Directional positioning OFF/ON		
		0009/0010	Completion signal control OFF/ON	Completion signal selection	
		0011	Program display selection command	Not required	
		0012	Current position display selection command		
		0013	Remaining angle display selection command		

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

# Single-axis NC Controllers

## Specifications of TPC

	TPC-Jr		TPC5	
Control axis	1 axis			
Servo motor	AC servo: ABS detector			
Command unit	0.001°(Decimal)		1 sec,0.001°,0.0001°(Decimal)	
Indexing number	Direct indexing Arc-indexing	1 to 999999 even indexing	1 to 9999 even indexing	
Max. command angle	±999.999°		±999°59'59",±999.999,±999.9999°	
Command system	INC, ABS, Shortcut ABS, INC/ABS mixed system			
Input system	MDI			
Program control	Workpiece No. (W0000 to 9999)			
Program capacity	1,000 blocks (Total of main and sub programs)		2,000 blocks (Total of main and sub programs)	
Positioning speed	Max. motor rotation speed: 3,000rpm		Max. motor rotation speed: 2,000rpm	
Operation Mode	AUTO: Operation interlocked with a machining center SINGLE: Single operation of TPC CHECK: Program check and call PROG: Program edit MDI: Setup operation JOG: Manual feed, step feed HANDLE: Manual pulse operation		AUTO: Operation interlocked with a machining center SINGLE: Single operation of TPC CHECK: Program check and call PROG: Program edit MDI: Setup operation JOG: Manual feed, step feed HANDLE: Manual pulse operation	
Display	OLED 20 figures×4lines		Liquid crystal display 20 figures×4lines	
Direct indexing number command	Move angle is directly commanded			
Repetition	Command of number of move amount repetitions 999(TPC-Jr) 1 to 9999(TPC5)			
Direct indexing number command	Indexing number of six digits for 360 degrees			
Arc-indexing number command	Command of arbitrary 3-digit angle (TPC-Jr) or 4-digit angle (TPC5)			
Lead cutting command	Interlocked operation with one axis of the machining center in the open loop status			
Zero point return command	Allows return to the first, second or third-zero point			
Feedrate command	F0: positioning speed F1 to 9: cutting feedrate			
Feedrate setting	1. By radius and surface speed setting 2. By move amount per second			
Sub-program	Up to eight levels of nesting are possible			
Workpiece coordinate system setting	Allows a workpiece coordinate to be set at any point			
Dwell	Allows output of a positioning completion signal to be delayed			
Single directional positioning	Allows positioning in one direction			
Backlash compensation	In increments of 0.001°		Setting by command unit	
Soft limit function	Sets a soft limit measured from the 1st zero position			
Automatic setting at power ON	1. Mode selection, AUTO/CHECK 2. Workpiece number setting 3. Block number setting			
Edit function	1. Insert 2. Delete 3. COPY			
Alarm	1. Program format errors 2. Program memory errors 3. Communication errors 4. Soft limit alarms 5. Overtavel 6. Servo motor alarms 7. Overheat in the cabinet (TPC5)			
Override function	×	5 to 200% 5% steps		
JOG/HANDLE feeding	Manual pulse feed, Jog feed, step feed		Manual pulse feed, jog feed	
Overtravel	The rotation range of the rotary table can be limited by limit switches. (Standard tilting axis)			
Manual 2nd zero setting	Enables the 2nd zero position to be set and changed at any point in the JOG(HANDLE) mode			
Input/output signal check	○			
Power	1φ200/220V±10% 50/60Hz	3φ200/220V±10% 50/60Hz		
Earth (less than 100 ohm earth resistance)	Model Power capacity Fuse rating	Model Power capacity Fuse rating		
	Jr K2 1.2KVA 10A	TPC5-SR6 2.3KVA 10A		
	Jr K3 1.9KVA 15A	TPC5-SR12 4.0KVA 15A		
		TPC5-SR30 5.9KVA 20A		
Environmental conditions	Ambient temperature: 0-40 degree Relative humidity: 20-80%(no condensation) Vibration: 0.3G or less, Non corrosive gas			
Weight	Jr K2 unit Weight: 7.0kg 285mm(W)×255mm(D)×135mm(H) Jr K3 unit Weight: 7.6kg 285mm(W)×255mm(D)×135mm(H)	Control unit Weight: 15kg 235mm(W)×377mm(D)×380mm(H) MDI unit Weight: 0.5kg 111mm(W)×30mm(D)×199mm(H)		
External output signal	From TPC to machining center Contact ratings: DC24V, 0.1A or less			

	TPC-Jr		TPC5	
FIN1	Positioning completion signal during interlocking operation		●	●
FIN2	Output of G7 completion or workpiece number setting completion (selectable by parameters)		●(AUTO mode)	◇
FIN3	Output of G7 completion or workpiece number setting completion (selectable by parameters)		×	◇
FIN4	Output of zero position (selectable by parameters)		×	◇
Workpiece number setting completion	Output at workpiece number setting completion (selectable by parameters)		●	◇
In AUTO mode	Output in AUTO mode		×	◇
LEVEL	Output during positioning (selectable by parameters)		●(Rotary table zero position)	◇
ALARM	Output in when alarm detected		●	◇
External input signal	From machining center to TPC (External power DC24V is also available.)			
START	Positioning start signal during interlocking operation (M-signal)		●	●
STOP	Input to stop rotary table		●	●
INTERLOCK	Input to interlock rotary table		×	◇
Selection of outer program	Workpiece number can be set externally		●	◇
BF (Strobe signal)	Strobe signal for setting workpiece number externally		●	◇
M-signal	M signal data fixed input system		●(6 points)	◇(16 points)
MDI lock	Input for locking MDI key operation		×	◇
Zero point return	1st zero return command		●	◇
Manual pulse generator	Manual operation can be performed with a manual pulse generator			
	Movement magnification: ×1, ×10, ×100			
Full-closed feedback control	Enable full-closed control (highly precise) with the Inductosyn or rotary encoder		×	
MP scale	Detecting unit 0.0001°(360poles) or 0.00005°(720poles)		×	◆
Encoder	Detecting unit 0.0001° or 0.00005°		×	◆
Serial channel	TPC program, feed rate and parameters can be stored in an external device			
	I-format: ISO		I-format: ISO	
	◆(RS232C)		◆(RS232C)	
Cable supplied (standard)	Between rotary table and TPC-Jr(1 pc) For Motor: 5m		Between rotary table and TPC5(2 pcs) For motor power supply: 5m For motor detector: 5m	
	—		Between TPC5 and MDI unit: 7m	
	Power cable: 5m		Power cable: 5m	
	Interlocking cable: 5m		Interlocking cable: 5m	
Cable supplied (Option)	Cables of different length are available			
	RS232C cable: 5m		Interlocking cable: 5m	
	Manual pulse generator (cable) 3m		B signal cable: 5m	
	—		RS232C cable: 5m	

●:Standard

◇:Optional interlocking cables are supplied

◆:Optional units and parts are supplied

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories


Options

Technical  
Information

## TPC Option

### TPC5 Full-featured interlocking cable

P.55




Required for the following functions:

- Stop or interlock input signal
- Positioning completion 2,3,4
- AUTO mode
- Positioning
- Alarm signal

● Full-featured interlocking cable  
(Standard length: 5m)

### TPC5 B signal cable



Required for the following functions:

- External input of workpiece numbers
  - External input of angles
  - Fixed data input through M-signal
- \* For using B signal cable, internal harness shall be added.

● B signal cable  
(Standard length: 5m)

### TPC-Jr RS232C cable

TPC5




Input and output of program, parameter and feed data for TPC5 and TPC-Jr, and data printout are carried out through external equipment, which is to be prepared by the customer. Also, the cables can be arranged by the customer.

● RS232C cable  
(Standard length: 5m)

### TPC5 High resolution capability Rotary Encoder type

P.64



Fully-closed loop control is possible by the feed-back from the rotary encoder.

- Rotary encoders
- IBV unit  
(by HEIDENHAIN)
- TPC5 RE

### TPC5 High resolution capability MP Scale type

P.64



Fully-closed loop control is possible by the feed-back from the MP scale.

- MP scale
- A/D converter  
(NIDEC MACHINE TOOL CORPORATION)
- TPC5 RI

### TPC-Jr "Remote Mode" specification

TPC5



Available for measuring system construction. To be connected with a personal computer using serial channel.

● RS232C cable

### TPC-Jr "Remote Mode + M" specification

P.52



To unify the program to start the rotary table by M-signal, by feeding a command for the indexing angle from the RS232C port at the NC controller of the machining center.

Note: This function may not be available for some machining centers. For details, ask the M/C manufacturer.

● RS232C cable

### TPC-Jr Manual pulse generator

Handle feed is available by turning the dial of a manual pulse generator. A dial rotation can feed 100 pulse and the magnification of step feeding angle can be selected among x1, x10 and x100.

● Manual pulse generator  
(Cable length 3m)

## TPC Machining Program Examples by TPC Controller

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB


NC Controllers

Accessories

Options

Technical  
Information

Direct angle command : G0




**N<sub>W<sub>NS</sub></sub> 000 G<sub>PRO</sub> 0 F<sub>POS</sub> 0 R<sub>RESD</sub> 002 θ<sub>DOD</sub> 90.000 CR**  
**N<sub>W<sub>NS</sub></sub> 001 G<sub>PRO</sub> 7 θ<sub>DOD</sub> 000 CR**

Quick Number of Repetition Indexing angle/time  
End of program

Positioning at 90° twice

Return to N<sub>W<sub>NS</sub></sub> 000 at the program end

Direct indexing number command(even indexing) : G1



**N<sub>W<sub>NS</sub></sub> 000 G<sub>PRO</sub> 1 F<sub>POS</sub> 0 R<sub>RESD</sub> 004 θ<sub>DOD</sub> 000004d CR**


360° is divided into quarters

**N<sub>W<sub>NS</sub></sub> 001 G<sub>PRO</sub> 7 θ<sub>DOD</sub> 000 CR**

Dividing 360° by 4, four times

Return to N<sub>W<sub>NS</sub></sub> 000 at the program end

Arc-indexing number command(even indexing by an arbitrarily-set angle) : G2



**N<sub>W<sub>NS</sub></sub> 000 G<sub>PRO</sub> 2 F<sub>POS</sub> 0 R<sub>RESD</sub> 005 θ<sub>DOD</sub> 120.000 CR**

Indexing number Angle for indexing

**N<sub>W<sub>NS</sub></sub> 001 G<sub>PRO</sub> 7 θ<sub>DOD</sub> 000 CR**

Dividing 120° by 5, five times

Return to N<sub>W<sub>NS</sub></sub> 000 at the program end

Uneven indexing



**N<sub>W<sub>NS</sub></sub> 000 G<sub>PRO</sub> 0 F<sub>POS</sub> 0 R<sub>RESD</sub> 001 θ<sub>DOD</sub> 70.000 CR**

**N<sub>W<sub>NS</sub></sub> 001 G<sub>PRO</sub> 0 F<sub>POS</sub> 0 R<sub>RESD</sub> 001 θ<sub>DOD</sub> 90.000 CR**

**N<sub>W<sub>NS</sub></sub> 002 G<sub>PRO</sub> 0 F<sub>POS</sub> 0 R<sub>RESD</sub> 001 θ<sub>DOD</sub> 125.365 CR**

**N<sub>W<sub>NS</sub></sub> 003 G<sub>PRO</sub> 0 F<sub>POS</sub> 0 R<sub>RESD</sub> 001 θ<sub>DOD</sub> 74.635 CR**

**N<sub>W<sub>NS</sub></sub> 004 G<sub>PRO</sub> 7 θ<sub>DOD</sub> 000 CR**

Positioning at 70° once


Positioning at 90° once

Positioning at 125.365° once

Positioning at 74.635° once

Return to N<sub>W<sub>NS</sub></sub> 000 at the program end

(-) direction indexing



**N<sub>W<sub>NS</sub></sub> 000 G<sub>PRO</sub> 0 F<sub>POS</sub> 0 R<sub>RESD</sub> 001 θ<sub>DOD</sub> -90.000 CR**


Reverse

**N<sub>W<sub>NS</sub></sub> 001 G<sub>PRO</sub> 7 θ<sub>DOD</sub> 000 CR**

Positioning at -90° once

Return to N<sub>W<sub>NS</sub></sub> 000 at the program end

Zero point return command : G4



**N<sub>W<sub>NS</sub></sub> 000 G<sub>PRO</sub> 4 R<sub>RESD</sub> 000**

Zero return To 1st zero position


Return to 1st zero position


Remote mode + M specification(Parameter change) ※Corresponding to cable option

The rotary table is controlled by TPC with M-signal sent from a machining center through RS232C.


Note: This function may not be available for some machining centers. For details, ask the M/C manufacturer.

Machining center :

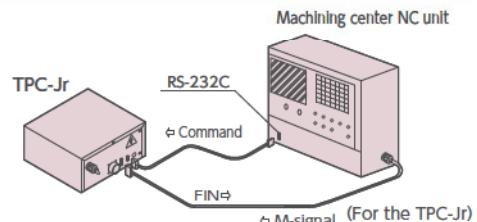


Program using Custom Macro	Necessary equipment	TPC-Jr : Software for remote mode NC unit for a machining tool : RSS232C connector and Custom Macro B (optional) (for FANUC). For details, ask the machine manufacturer.	RS232C/interlock cable, RS232C cross cable
 POOPEN : DPRNT[/MOVA180.] : M70 : GO1Z100.F200 : PCLOS :	DPRNT[/MOVA180.] : M70 : GO1Z100.F200 : PCLOS :	RS232C port opens Command of absolute positioning at 90 is transmitted to TPC Positioning starts Machining center in operation Command of absolute positioning at 180 is transmitted to TPC Positioning starts Machining center in operation RS232C port closes	RS232C port opens Command of absolute positioning at 90 is transmitted to TPC Positioning starts Machining center in operation Command of absolute positioning at 180 is transmitted to TPC Positioning starts Machining center in operation RS232C port closes

# Installation of TPC controller

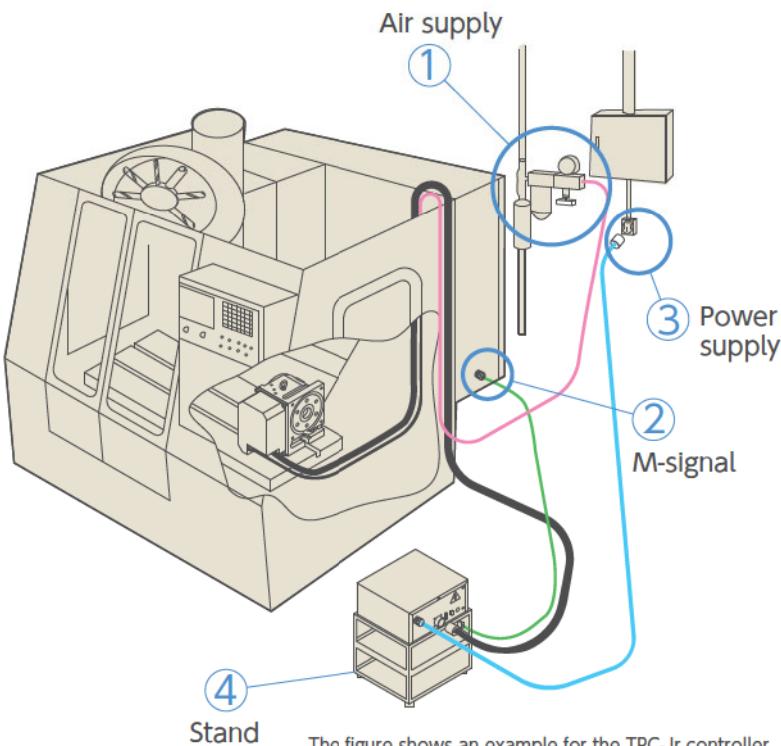

## To be provided by customers

### ① Air supply

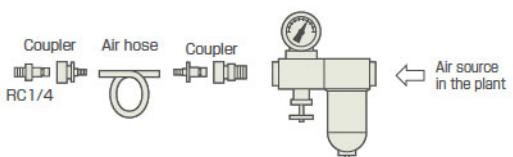


Air supply is necessary for the pneumatic or air-hydraulic clamp system of the NC rotary tables with the TPC5 or TPC-Jr controller.

The following are to be provided by customers:

- Air filter and regulator (Air pressure: 0.49 MPa)
- Air hose or air tube
- Joint coupler (RC 1/4 for the table)

Some models need a 6mm diameter tube for connection.


### ② M-signal



When the machining center controls the rotary table, it uses M-signals. Be sure to confirm with the machine manufacturer that M-signals or M-signal completion signals are transferred to the terminal block of the machine controller. If not, ask the manufacturer to do the required work.

- ☞ For the connection with an interlocking cable, refer to the examples shown on **P.54**

### ③ Power supply



A socket for the TPC controller is necessary. A 3P plug is equipped with the TPC controller, and is recommended. The outlet for the connection is required.

TPC side connector WF4420(Panasonic)

Outer power supply connector WF1420 or the others(Panasonic)

In case of the different type of connector, shall be arranged by the customer.

- ☞ For the power capacity of each controller, refer to **P.50**

Conduct grounding (less than 100 ohm earth resistance)

### ④ Stand

A stand for the TPC controller is to be provided by the customer.

- ☞ For the dimensions and weight of the controller, refer to **P.46 to 48 P.50**

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## TPC Controllers to Interlock with Machining Tools

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNC

Multi-Spindle  
TWM

RDS

RTV  
RTT

TDS  
TDB


NC Controllers

### TPC-Jr


Interlocking cable (Standard length: 5m)




Connector dimension  
(on machining center)



a) When a start signal and an indexing completion signal are used:

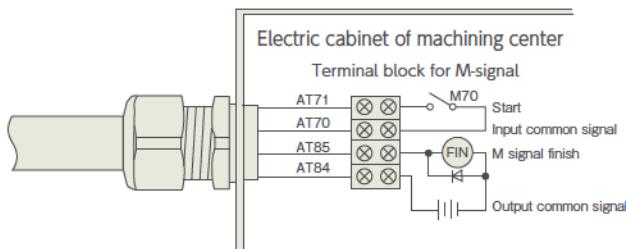

b) When all the signals through interlocking cables are used:

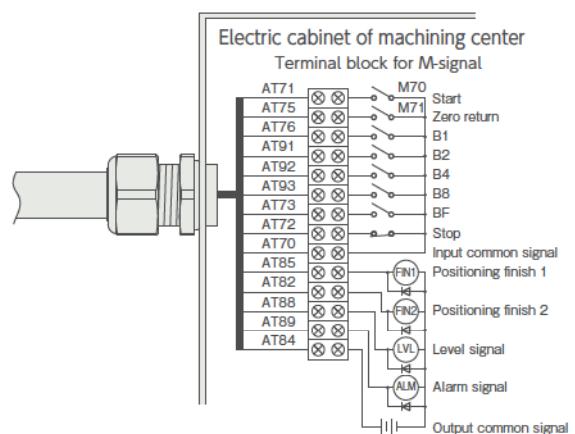


Note 1: When completion signals are received by a relay, the power supply should be 24VDC. Do not apply 100VAC or 200VAC.

Note 2: By changing the switch in the controller, a start signal is also available with the external power supply of 24VDC.

Note 3: Be sure to take countermeasures against electric noise by attaching surge protectors to relays for a machining center.

### TPC5



Interlocking cable(Standard length: 5m)

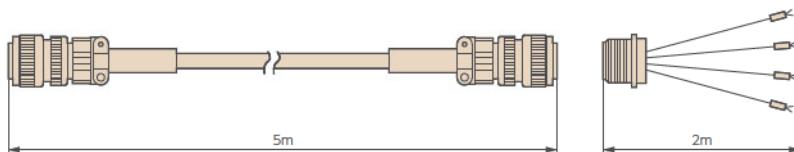

a) Standard interlock cable

For interlocking only with M-signal and the completion signal

Connector dimension  
(To machining center)

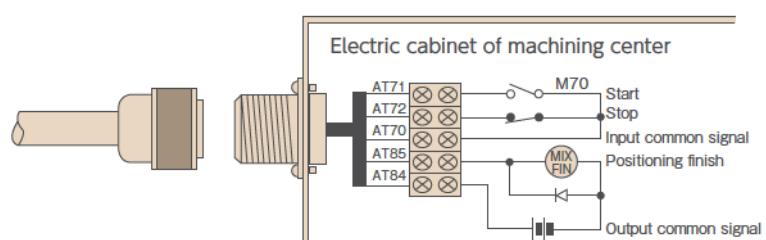

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV

RTT

TDS

TDB

NC Controllers

Accessories

Options

Technical  
Information



## TPC Controllers to Interlock with Machining Tools

### b) Fully-equipped interlocking cable (Option)

A variety of signals such as a stop or interlock input signal and a level or alarm output signal are available with this cable.

B signal cable is required when the setting functions for the workpiece number and angle data are used, or when the fixed indexing angle input system by an M-signal is used.

If you want to see some examples of the connections with this cable, please contact Tsudakoma.

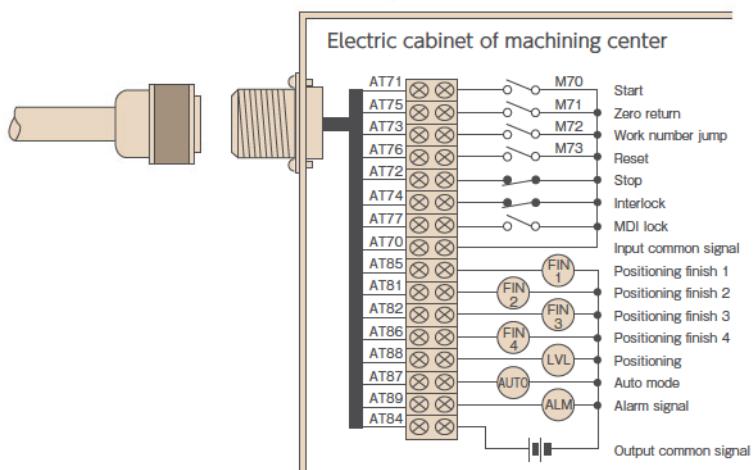


Note 1: When completion signals are received by a relay, the power supply should be 24VDC. Do not apply 100VAC or 200VAC.

Note 2: By changing the switch in the controller, a start signal is also available with the external power supply of 24VDC.

Note 3: Be sure to take countermeasures against electric noise by attaching surge protectors to relays for a machining center.

## Time Chart

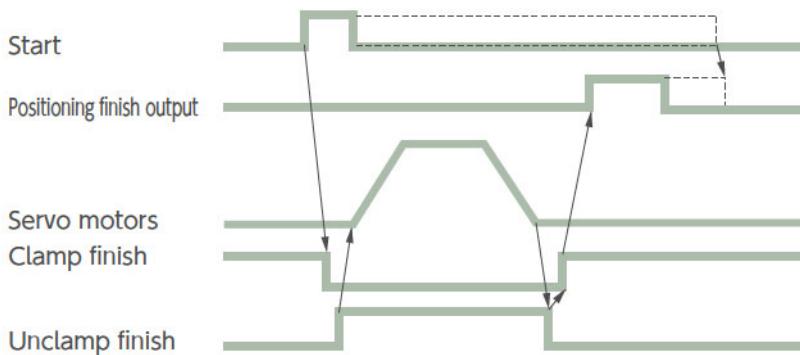

Note 1: A start input signal, in the form of either a pulse signal (of more than 10 msec) or level signal, can be accepted.

Note 2: During the interlocking operation with a machining center carried out through an M-signal, the M-signal should be completed by the positioning completion signal.

## TPC Standard Cable Specifications

The tables below shows the maximum outer diameter and the curved radius of standard cables which are supplied with the rotary tables ready for the TPC5 or TPC-Jr controller.

Unit: mm

	Cable	Order Code	Max. outer diameter	Min. curved radius
TPC5	Motor power cable	NS#20 (SANKEI MANUFACTURING CO.,LTD.)	20	90
	Motor signal cable			
TPC-Jr	Motor cable	NS#25 (SANKEI MANUFACTURING CO.,LTD.)	25	100

Model number, maximum outer diameter and curved radius may differ depending on specifications.

## NC Rotary Tables / TPC-Jr Dimensions and Specifications

## NC Rotary Tables / TPC-Jr

Unit: mm

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV

RTT

TDS

TDB



NC Controllers

Accessories



Options

Technical  
Information



## RN-100R / TPC-JrK2

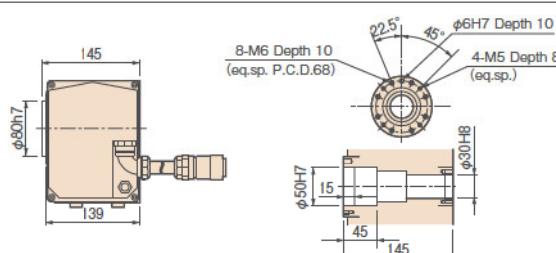



## RWE/RWA-160R / TPC-JrK2

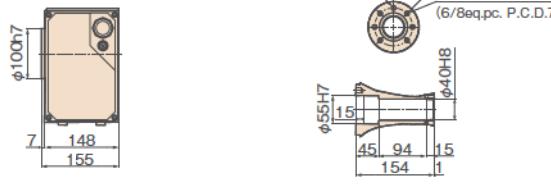



## RWE/RWA-200R / TPC-JrK3

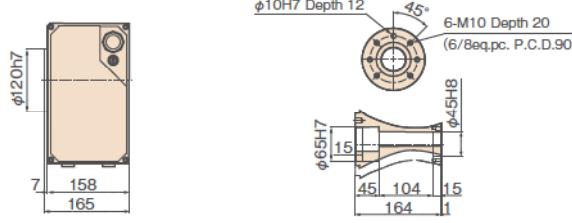

## RWA-250R / TPC-JrK3

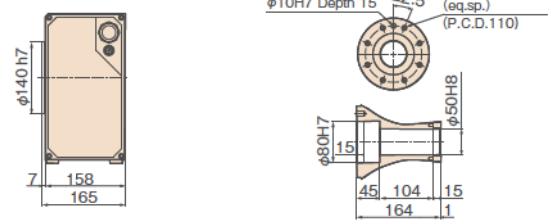

## RWA-320R / TPC-JrK3

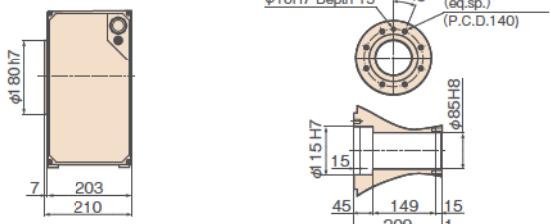

## NC Table Specifications (with TPC-Jr)


	RN-100	RWE/RWA-160	RWE/RWA-200	RWA-250	RWA-320
TPC-Jr	K2	K2	K3	K3	K3
Reduction ratio	1/36	1/72	1/72	1/120	1/180
Max. rpm min <sup>-1</sup>	66.6/ Motor 2,400	41.6/ Motor 3,000	41.6/ Motor 3,000	25/ Motor 3,000	16.6/ Motor 3,000

Note 1: Other specifications [P.18](#)

Note 2: Contact us before an eccentric load is applied to the table due to continuous cutting feed or jigs.

# NC Tilting Rotary Tables / TPC-Jr

Unit: mm

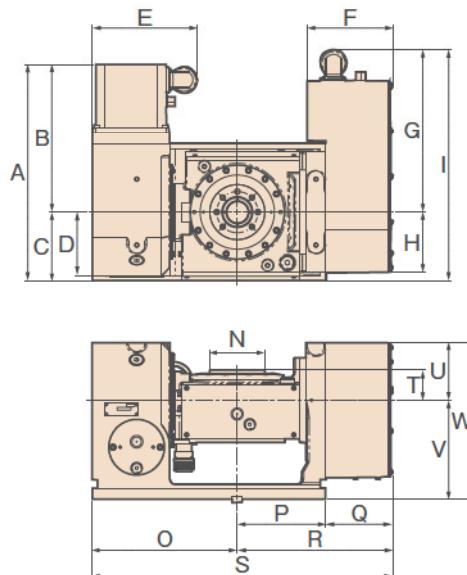

## NC Tilting Tables Specifications (with TPC-Jr)

		TPC	Reduction ratio	Max.rpm min <sup>-1</sup> /Motor rotation condition
TWA-100	Rotary	K2	1/60	41.6/2,500
	Tilt		1/120	16.6/2,000
TWA-130	Rotary	K2	1/60	41.6/2,500
	Tilt		1/120	16.6/2,000
TWA-160	Rotary	K2	1/72	41.6/3,000
	Tilt		1/120	16.6/2,000
TWA-200	Rotary	K3	1/45	44.4/2,000
	Tilt		1/90	22.2/2,000
TBS-130	Rotary	K2	1/48	62.5/3,000
	Tilt		1/60	50/3,000
TBS-160	Rotary	K2	1/60	50/3,000
	Tilt	K3	1/60	50/3,000

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
TWA-100	327	224	103	90	198	145	276	90	379	103	100	100	200	Φ86h7	195	134	111	245	440	45	85	135	220
TWA-130	324	224	100	90	208	145	276	90	379	103	100	100	200	Φ90h7	211	134	111	245	456	60	90	150	240
TWA-160	395	270	125	115	191	156	296	110	421	125	125	125	250	Φ100h7	264	161	122	283	547	55	105	180	285
TWA-200	435	280	155	135	208	157	321	135	476	155	145	145	290	Φ120h7	284	192	157	349	633	60	135	210	345
TBS-130	375	265	110	100	189	150	281	110	391	—	110	110	22	Φ90h7	235	160	92	252	487	65	110	160	270
TBS-160	364	249	115	—	215	168	296	115	421	—	125	125	250	Φ100h7	275	180	118	298	573	70	110	200	310

Note 1: Other specifications **P.16** **P.36**

Note 2: Contact us before an eccentric load is applied to the table due to continuous cutting feed or jigs.



PDF/DXF/3D drawings can be downloaded from the official website.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## Chuck

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB



NC Controllers

Accessories

Options

Technical  
Information

## Scroll Chuck

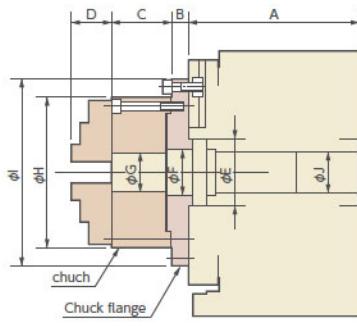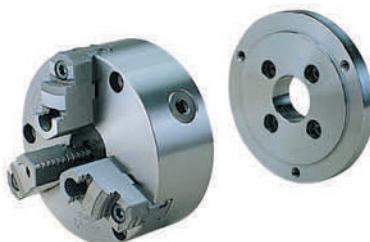

Chuck size (inch)	Chuck type	Outer chucking range(mm)	Inner chucking range(mm)
4	TC110F	2 to 106	36 to 102
5	TC130F	3 to 130	42 to 123
6	TC165F	3 to 156	52 to 148
7	TC190F	3 to 184	56 to 174
9	TC230F	4 to 214	64 to 202
10	TC273F	10 to 246	72 to 230
12	TC310F	10 to 275	82 to 265
15	TC385F	15 to 345	100 to 327
18	TC460F	15 to 410	152 to 436


Note 1: The values in the table above are the dimensions with hardened jaws. (Soft jaws are optional.)

Note 2: Some workpieces, even in the chucking range, may not be chucked due to jaw configuration.

	Chuck size (inch)	A	B	C	D	E	F	G	H	I	J	Unit: mm
RBS/RBH-160	4	170	18	58	31.3	55	45	24	112	112	40	
	5			60	37.3			32	132	132		
	6			66	44.3			44	167	167		
	7			75	46.3			54	192	192		
RBS/RBH-250	5	180	18	60	37.3	80	65	32	132	132	50	
	6			66	44.3			44	167	167		
	7			75	46.3			54	192	192		
	9			82	55.3			70	233	233		
RBS/RBH-320	6	225	18	66	44.3	115	100	44	167	167	85	
	7			75	46.3			54	192	192		
	9			82	55.3			70	233	233		
	10			86	53.3			100	274	274		
RN-100	12	225	18	92	59.3	50	50	110	310	310	30	
	4			58	31.3			24	112	112		
	5			60	37.3			32	132	132		
	4	155	18	58	31.3			24	112	112		
RWE/RWA/RWH-160	5			60	37.3	55	45	32	132	132	40	
	6			66	44.3			44	167	167		
	7			75	46.3			54	192	192		
	5	165	18	60	37.3			32	132	132		
RWE/RWA/RWH-200	6			66	44.3	65	55	44	167	167	45	
	7			75	46.3			54	192	192		
	9			82	55.3			70	233	233		
	5	165	18	60	37.3			32	132	132		
RWA/RWH-250	6			66	44.3	80	65	44	167	167	50	
	7			75	46.3			54	192	192		
	9			82	55.3			70	233	233		
	10			86	53.3			100	274	274		
RWA/RWH-320	12	210	18	92	59.3	115	100	110	310	310	85	
	6			66	44.3			20	75	46.3		
	7			75	46.3			25	82	55.3		
	9			82	55.3			25	92	59.3		
RWB-250	6	180	18	66	44.3	105	105	44	167	208	80	
	7			75	46.3			54	192	236		
	9			82	55.3			70	233	233		
	5	240	18	66	44.3			44	167	216	120	
RWB-320	6			75	46.3	150	101	54	192	246		
	7			82	55.3			70	233	286		
	9			86	53.3			100	274	318		
	10			92	59.3			110	310	318		
RWB-400	7	275	18	20	75	200	151	54	192	286	160	
	9			25	82			70	233	286		
	10			25	86			100	274	336		
	12			25	92			110	310	370		
RWB-500	9	325	18	30	100	220	170	150	385	385	182	
	12			35	114			210	110	310		
	15			35	100			210	150	385		
	18			35	114			210	180	460		

Note 1: The above dimensions refer to power chucks by KOBAYASHI IRON WORKS CO., LTD.

Note 2: The flange type and the method of attaching the flange fixing bolt differ depending on the rotary table and the chuck size.

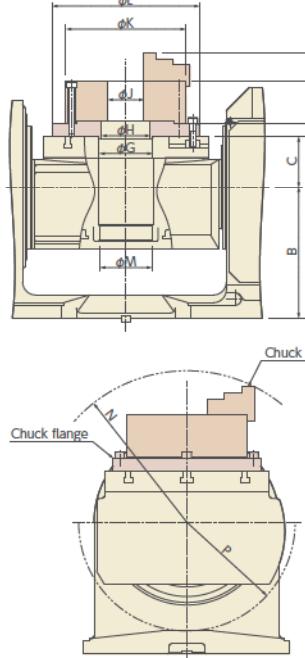


型式	Chuck size (inch)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Unit: mm
TBS-130	5	225	160	65	18	60	37.3	55	45	32	132	132	40	R198	R127	127	
	4					58	31.3	32	112	112	40	R191	127	127	127		
	5					60	37.3	55	45	32	132	132	40	R204			
	6					66	44.3	44	167	167	40	R223					
TBS-160	7					75	46.3	54	192	192	40	R241	160	160	160	160	
	4	180	135	45	15	58	31.3	55	45	24	112	112	35	R164			
	5					60	37.3	32	132	132	35	R177	R106				
	5					60	37.3	32	132	132	35	R193					
TWA-100	5	210	150	60	18	60	37.3	55	45	24	112	112	35	R176	160	160	160
	4					58	31.3	32	132	132	35	R189					
	5					60	37.3	32	132	132	35	R208					
	4					66	44.3	44	167	167	40	R226					
TWA-130	6	235	180	55	18	60	37.3	55	45	32	132	132	35	R200	160	160	160
	5					60	37.3	32	132	132	35	R219					
	6					66	44.3	32	132	132	35	R236					
	7					75	46.3	44	167	167	40	R258					
TWA-200	5	270	210	60	18	60	37.3	65	55	32	132	132	45	R254	160	160	160
	6					66	44.3	54	192</								

## Power chuck



Chuck size (inch)	Chuck type	Outer chucking range (mm)	Hydraulic cylinder type	Pneumatic cylinder type
4	H01MA 4	6 to 110	HH4C 80	H05CH100
5	H01MA 5	15 to 135	HH4C 80	H05CH150
6	H01MA 6	20 to 165	HH4C 80	H05CH175
8	H01MA 8	18 to 210	HH4C100	H05CH250
10	H01MA10	24 to 254	HH4C125	H05CH300



Example of pneumatic power chuck use



### Hydraulic cylinder dimensions

Unit: mm

	Chuck size (inch)	A	B	C	D	E	F	G	H	I
RBS/RBH-160	4	27	52	18	170	50	175	492	110	—
	5	27	52			64		506	135	—
	6	43	72			50		528	165	—
RBS/RBH-250	4	27	52	20	180	67	175	521	110	—
	5	27	52	20		64		518	135	—
	6	44	72	24		64		559	165	—
RBS/RBH-320	6	44	72	24	225	76	175	616	165	—
	8		85	35			190	655	210	—
	10		95	35			197	672	254	—
RWA/RWE/RWH-160	4	27	52	18	155	50	175	477	110	—
	5	27	52			64		491	135	—
	6	43	72			50		513	165	—
RWA/RWE/RWH-200	4	27	52	20	165	50	175	489	110	—
	5	27	52	20		64		503	135	—
	6	43	72	24		50		529	165	—
RWA/RWH-250	4	27	52	20	165	50	175	489	110	—
	5	27	52	20		64		503	135	—
	6	43	72	24		50		529	165	—
RWA/RWH-320	6	43	72	24	210	76	175	600	165	—
	8		85	35			190	639	210	—
	10		95	35			197	656	254	—
RWB-250	4	27	52	20	180	65	175	519	110	185
	5	27	52	20				519	135	185
	6	43	72	24				559	165	205
RWB-320	6	44	72	24	240	65	-15	175	540	165
	8		85	35			-15	190	579	210
	10		95	35			45	197	656	254
RWB-400	8	44	85	35	275	-24	190	605	210	305
	10		95	35			197	622	254	

### Pneumatic cylinder dimensions

Unit: mm

	Chuck size (inch)	A	B	C	D	E	F	G	H
RBS/RBH-160	4	27	52	18	170	50	182	499	110
	5	27	52			64	190	521	135
	6	43	72			64	190	557	165
RBS/RBH-250	4	27	52	20	180	67	182	528	110
	5	27	52			64	190	533	135
	6	44	72			64	190	570	165
RBS/RBH-320	6	44	72	24	225	76	190	631	165
	8		85	35			243	708	210
	10		95	35			258	733	254
RWA/RWE/RWH-160	4	27	52	18	155	50	182	484	110
	5	27	52			64	190	506	135
	6	43	72			64	190	542	165
RWA/RWE/RWH-200	4	27	52	20	165	67	182	513	110
	5	27	52			64	190	518	135
	6	43	72			64	190	554	165
RWA/RWH-250	4	27	52	20	165	67	182	513	110
	5	27	52			64	190	518	135
	6	43	72			64	190	554	165
RWA/RWH-320	6	43	72	24	210	76	190	615	165
	8	43	85	35			243	692	210
	10	43	95	35			258	717	254

Note: The above dimensions refer to power chucks by HOWA MACHINERY, LTD. A front-mounting pneumatic chuck is also available.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWK  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNC

Multi-Spindle  
TWM

RDS

RTV  
RTT

TDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## Tailstock

### Compatible Rotary Tables

Tailstock type	Manual	Hydraulic	Pneumatic
	NC Rotary Table		
RN-100	TL-110M	—	—
RWE/RWA/RWH-160 RWM-160	TL-135M	TLH-135	TLP-135M
RBS/RBH-160 RBH-160 RWE/RWA/RWH-200 RWA/RWH-250 RWB-250 RWM-200/250	TL-160M	TLH-160	TLP-160M
RBS/RBH-250 RWA/RWH-320 RWB-320 RWM-320	TL-210M	TLH-210	—
RBS/RBH-320 RWB-400	TL-255M	TLH-255	—
RWB-500	TL-310M	—	—
RWB-630 RNCK-631	TL-400M	—	—
RCV-800	TL-530M	—	—


### Order Code

T L   - 1 6 0 M

Center height




Alphabet	Type
N/A	Manual
H	Hydraulic
P	Pneumatic

### Example of Pneumatic Tailstock



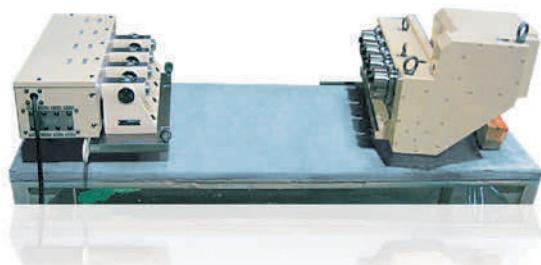


### Manual Tailstock

#### TL-110M,135M

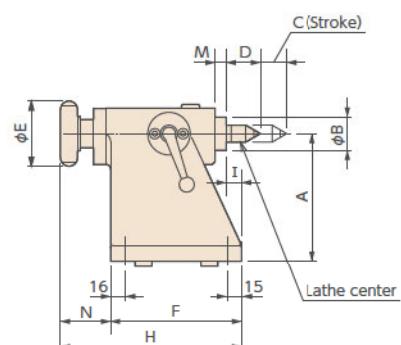

#### TL-□□□M

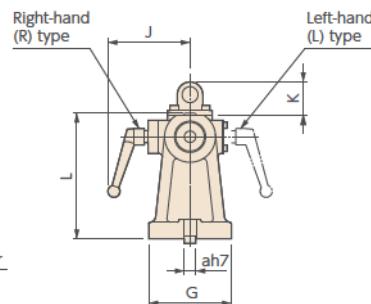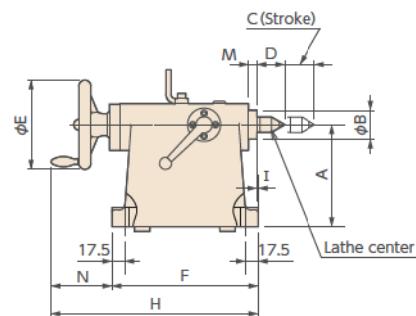

## Dimensions

Order Code	Morse taper	Center height A	Center dia. B	Stroke C	Lathe center D	Handle dia. E	Base dimensions F×G	Unit: mm													
								H	I	J	K	L	M	N	a	b	c	d	e	g	Weight kg
TL-110M	MT2	110	35	28	36	70	139×100	192	16	92	—	141	12	53	14	12	55	8	23	20	8
TL-135M	MT2	135	35	28	36	70	139×100	192	16	92	—	166	12	53	14	12	55	8	23	20	9
TL-160M	MT3	160	45	47	44	140	230×130	328	2	129	53	197	13	98	18	16	75	11	28	30	22
TL-190M	MT3	190	45	47	44	140	230×140	328	2	129	53	227	13	98	18	16	75	11	28	30	24
TL-210M	MT3	210	45	47	44	140	230×146	328	2	129	53	247	13	98	18	16	75	11	28	30	26
TL-235M	MT4	235	50	51	52.5	160	270×160	381	12	132	53	274	8	113	18	16	80	11	28	35	30
TL-255M	MT4	255	50	51	52.5	160	270×170	381	12	132	53	294	8	113	18	16	80	11	28	35	38
TL-310M	MT4	310	60	51	52.5	180	315×220	422	15.5	154	68	354	9.5	107	18	16	85	11	28	40	63
TL-400M	MT4	400	60	51	52.5	180	315×240	422	15.5	154	68	444	9.5	107	18	16	85	11	28	40	76
TL-530M	MT4	530	80	66	52.5	225	410×290	528	29	165	68	594	6	118	22	20	95	13	32	40	138



TLP-135M

## Example




## Hydraulic Tailstock

TLH-□□□



TLH-160

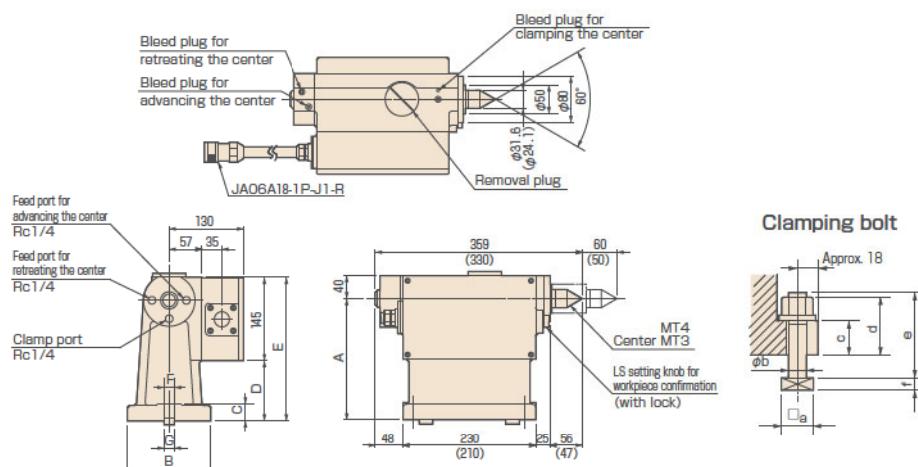

Note 1: Dimensions in parentheses are for the TLH-135.

Note 2: Specify the cable length when placing an order.

## Dimensions and specifications

Order Code	A	B	C	D	E	F	Carbide center	Hydraulic MPa	Center thrust force N	Center clamp torque N	Weight kg	Unit: mm					
												G	a	b	d	e	f
TLH-135	135	110	25	30	175	19	MT3		1,670		28						
TLH-160	160	130	30	55	200	19	MT4		2,352		33						
TLH-210	210	146	30	105	250	19	MT4		2,352		36						
TLH-255	255	170	35	150	295	19	MT4		2,352		40						

\*The table above shows the center thrust force and clamp torque when the hydraulic pressure is 3.5MPa.

Order Code	G	a	b	d	e	f	Unit: mm						
							TLH-135	14	23	12	42	60	8
TLH-160	16	26	16	46	70	10							
TLH-210	18	28	16	46	70	11							
TLH-255	14	23	12	47	65	8							
	16	26	16	51	75	10							
	18	28	16	51	75	11							
	16	26	16	56	75	10							
	18	28	16	56	80	11							
	20	32	18	60	90	11							

## Support Spindle

User friendly renewal allows mounting of compact rotary joint and the top surface design of the spindle is the same as the basic models RWA/RWE/RWA-160.

☞ Rotary joint P.66

### Compatible Rotary Tables

Support spindle type	No clamp	Pneumatic clamp	Hydraulic clamp	Strong hydraulic clamp
NC Rotary Table				
RWE/RWA/RWH-160	SS-135	SE-135	SH-135	—
RWB-K RNCK	SS-160	SE-160	SH-160	SSB-160
RCH RNC	SS-210	SE-210	SH-210	SSB-210
RWB-400	—	—	—	SSB-255
RWB-500	—	—	—	SSB-310

### Order Code

S S - 1 3 5  
Center height


Alphabet	Clamp
S	No clamp
E	Pneumatic
H	Hydraulic

S S B - 1 6 0  
Center height



### SS-□□□ (No clamp)



SS-160



Sectional view of Support spindle

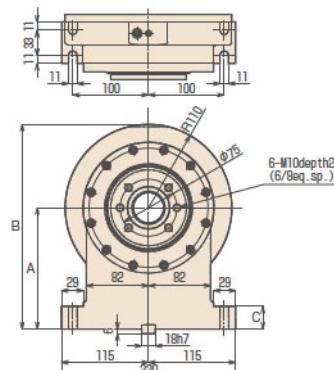


Unit: mm

Order Code	A	B	C	Weight kg
SS-135	135	245	25	19
SS-160	160	270	30	21
SS-210	210	320	30	24



### SE-□□□ (Pneumatic clamp)



SE-160



Sectional view of Support spindle

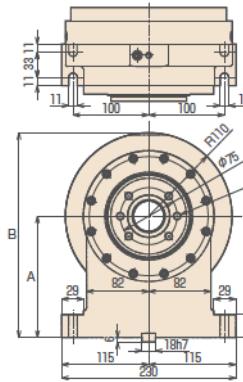

Unit: mm

Order Code	A	B	C	Clamping Torque(N·m) (0.49MPa)	Weight kg
SE-135	135	245	25	400	28
SE-160	160	270	30	400	30
SE-210	210	320	30	400	33

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories


Options

Technical  
Information

## SH-□□□ (Hydraulic clamp)



SH-160

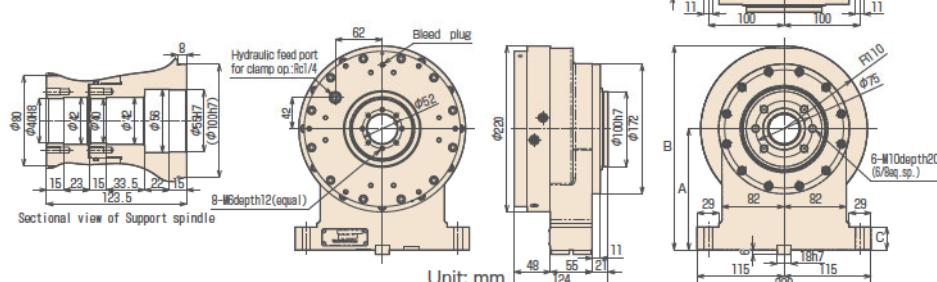


Order Code	A	B	C	Clamping Torque (N·m) (3.5MPa)	Weight kg
SH-135	135	245	25		28
SH-160	160	270	30	800	30
SH-210	210	320	30		33

## SSB-□□□





SSB-255

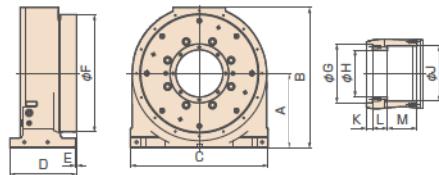


Order Code	A	B	C	D	E	F	G	H	J	K	L	M	Clamping Torque (N·m) (3.5MPa)	Weight kg
SSB-160	160	303	290	175	5	250	105H7	80H7	95H8	15	42	66	1,300	2,000
SSB-210	210	396	380	210	5	320	150H7	120H7	145H8	15	50	90	3,100	4,700
SSB-255	255	480	470	230	5	400	200H7	160H7	190H8	20	52	100	5,500	8,000
SSB-310	310	560	470	230	5	500	200H7	160H7	190H8	20	52	100	5,500	8,000

## Face Plate

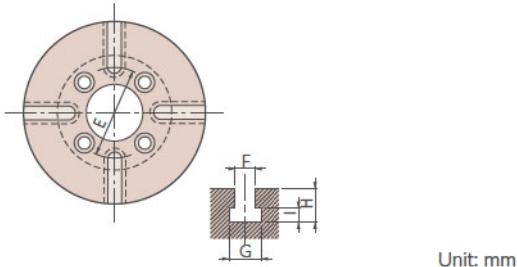

Mount by fitting  
inner dia.  
of the spindle.



Mount by fitting  
outer dia.  
of the spindle.  
For RN-100 only

	A Face plate diameter	B	C	D	E	F	G	H	I
RN-100	φ135	25	φ50H7	5	(#50 through T-slot)	10H8	16 <sup>+2</sup> <sub>0</sub>	17	7 <sup>+1</sup> <sub>0</sub>
TBS-130 TWA-100/130 TWM-100	φ135	25	φ40H7	5	φ70	12H8	19 <sup>+2</sup> <sub>0</sub>	19	8 <sup>+1</sup> <sub>0</sub>
RBS/RBH-160 RWA/RWE/RWH-160 RWM-160	φ160	30	φ50H7	3	φ80	12H8	19 <sup>+2</sup> <sub>0</sub>	19	8 <sup>+1</sup> <sub>0</sub>
TBS-160 TWA-160 TWM-160	φ200	30	φ50H7	3	φ80	12H8	19 <sup>+2</sup> <sub>0</sub>	19	8 <sup>+1</sup> <sub>0</sub>
RWA/RWE/RWH-200 RWM-200 TWA-200	φ200	30	φ60H7	3	φ90	12H8	19 <sup>+2</sup> <sub>0</sub>	19	8 <sup>+1</sup> <sub>0</sub>
RBS/RBH-250 RWA/RWE/RWH-250 RWM-250	φ250	30	φ60H7	3	φ90	12H8	19 <sup>+2</sup> <sub>0</sub>	19	8 <sup>+1</sup> <sub>0</sub>
TBS-250 TWM-250									
RBS/RBH-320 RWA/RWE/RWH-320 RWM-320	φ320	40	φ110H7	5	φ180	14H8	23 <sup>+2</sup> <sub>0</sub>	23	9 <sup>+2</sup> <sub>0</sub>

\* Only face plate for RN-100 is mounted by fitting outer diameter of the spindle.

\* TSUDAKOMA recommends the face plate to fit inner diameter of the spindle.

TWA-160/TBS-160 also has a face plate for fitting outer diameter of the spindle, so please check the face plate of your existing machine when purchasing a repeat unit.

## Example



## High-precision Specification by Rotary Encoders or MP Scales

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories


Options

Technical  
Information


Indexing accuracy can be upgraded by attaching a rotary encoder or MP scale to the spindle of the rotary table. The sum of the cumulative indexing accuracy of the rotary encoder or the MP scale and electrically divided errors of the pre-amplifier or the waveform shaping unit is referred to as the indexing accuracy of the rotary tables with scales. The indexing accuracy is guaranteed by TSUDAKOMA.

### Model Description


"RWB-□□□R,□□"




Example of measurement indexing accuracy with scale

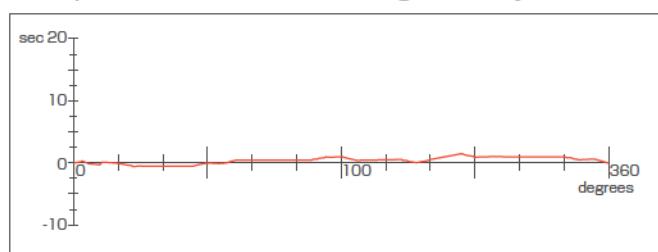

Rotary encoder



MP scale

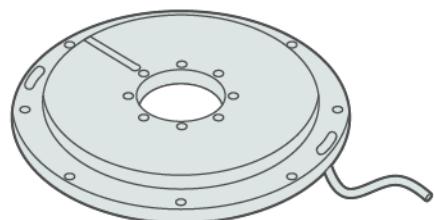

### Indexing accuracy with scale



		Rotary encoders		MP scales	
		Order Code	Accuracy with scale	Order Code	Accuracy with scale
RN-100	Rotary axis	RCN23*1, RCN25*1	15sec	—	—
RBS/RBH-160 RWE/RWA/RWH-160,200	Rotary axis	RCN23*1 or RU77-4096A	15sec	MPI 536A	15sec
RBS/RBH-250,320 RWA/RWH-250,320	Rotary axis	RCN83*1, RCN85*1 or RS97-1024	10sec/RCN83*1, RS97-1024 6sec/RCN85*1	MPI 736B	10sec
RWB-250	Rotary axis	RCN83*1, RCN85*1 or RS97-1024	10sec/RCN83*1, RS97-1024 6sec/RCN85*1	MPI 736B	10sec
RWB-320	Rotary axis			MPI 1072B	8sec
RWB-400,500,630 RNCK-631 RCH-800,1000,1250 RCV-800,1000,1250,1600	Rotary axis			MPI 1272B	8sec
TWA-130 TWA-160 TWA-200	Rotary axis* Tilt axis			MPI 536A	15sec
TBS-130 TBS-160	Rotary axis* Tilt axis	RCN23*1 or RU77-4096A	15sec	MPI 736B	10sec
TBS-250	Rotary axis			MPI 1272B	8sec
TN-320 TN-450	Rotary axis Tilt axis	RCN83*1, RCN85*1 or RS97-1024	10sec/RCN83*1, RS97-1024 6sec/RCN85*1	MPI 736B	10sec
TWB-320	Rotary axis Tilt axis			MPI 1072B	8sec
TWB-630	Rotary axis Tilt axis	RCN23*1,RCN25*1 RCN83*1,RCN85*1	15sec/RCN23*1 10sec/RCN83*1 6sec/RCN85*1	MPI 736B	10sec
TWB-1000	Rotary axis Tilt axis			MPI 1072B	15sec
		RCN83*1,RCN85*1	10sec/RCN83*1 6sec/RCN85*1	MPI 1272B	8sec
				MPI 1272B	15sec

For other accuracy standard. [from P.74](#)

Accuracy differs depending on the specifications of the tables. Ask us for further information.

\*Rotary encoders are unavailable.

## Specifications of rotary encoders

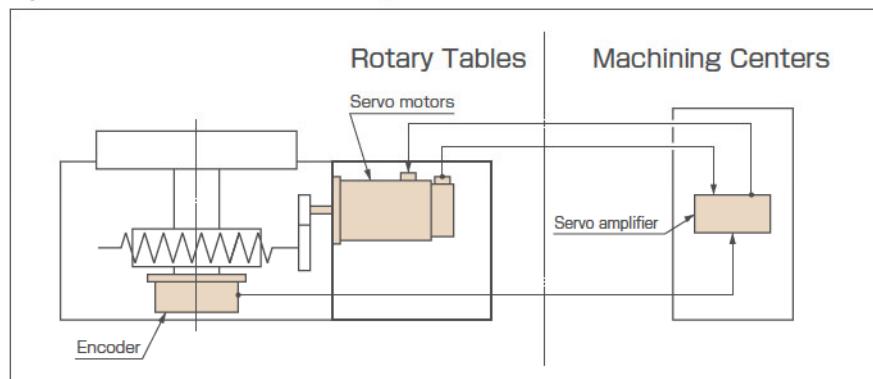

### HEIDENHAIN

Rotary Encoders	RON886	RCN23*1	RCN83*1	RCN85*1
Interface unit	IBV102	Not required	Not required	Not required
Recommended resolution	0.0005°	26bit ABS	29bit ABS	29bit ABS

### Magnescale

Rotary Encoders	RU77-4096A	RS97-1024
Recommended resolution	23bit ABS	23bit ABS

### Model RU77 and corresponding Interface

**RU77-4096A** G



Interface	★
FANUC	A
MITSUBISHI ELECTRIC	D
YASKAWA ELECTRIC	F

### Model RS97 and corresponding Interface

**RS97-1024EG**

Interface	★
FANUC	A
MITSUBISHI ELECTRIC	D

## Specifications of MP scales (by NIDEC MACHINE TOOL CORPORATION)

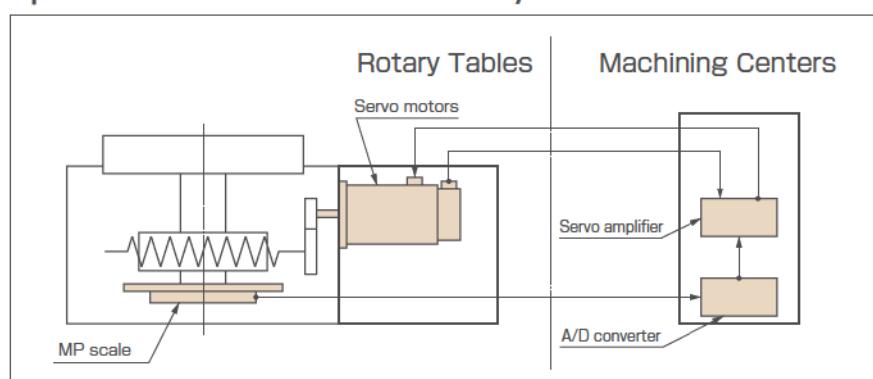

MP scale	MPI 536A	MPI 736B	MPI 1072B	MPI 1272B
Recommended resolution	0.0001°	0.0001°	0.00005°	0.00005°
A/D converter	ADB-20J10:A/B/Z phase square wave ADB-20J60:Serial I/F ADB-K60F:FANUC serial I/F ADB-K60M:Mitsubishi Electric Serial I/F			

Note 1:AD converter (corresponding to the serial output interface) is necessary in the MPRZ series.


Note 2:Preamplifiers are necessary for MPR-series.

Note 3:When using preamplifiers for MPR-series other than those of NIDEC MACHINE TOOL CORPORATION, please consult us.

- RBS
- RBH
- Multi-Spindle RBM
- TBS
- RWE/RWA RN
- RWH
- RWA-B RNCV-B
- RWB
- RWB-K RNCK
- RCB
- RCH RNC
- RCV
- Multi-Spindle RWM
- TWA/TN
- TWB TTNC
- RTV RTT
- TDS TDB
- NC Controllers
- Accessories
- Options
- Technical Information

## Pull Stud

A unit to position and fix a fixture and a workpiece on the rotary table by using the taper shank with a pull stud. This unit can be combined with a robot or a work loader to create an unmanned machining system.

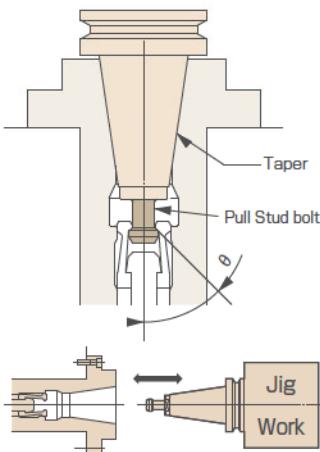

\* With clamp/unclamp confirmation switch

### Applicable models and specifications

		Unit: mm	
Order Code	Taper shank	Order Code	Taper shank
RWB-250	BT-50	TWA-160	BT-40
RWB-320		TWA-200	
RWB-400		TBS-250	BT-50
RWB-500		TN-320	
		TWB-320	BT-40
			BT-50

Specify the pull stud type.

Taper	Pull stud type
BT-50	$\theta$
BT-40	45° I
	60° II
	90° Others


## Rotary Joint

A rotary joint unit to supply hydraulic or pneumatic pressure to workpieces or actuators mounted on the rotary tables. Automatic loading and unloading of workpieces are possible.


### Applicable models and specifications

Order Code	Size	Max. number of ports		Rated supplied pressure MPa
		Internal mount type	External mount type	
RBS/RBH/RBM/ RWE/RWA/ RWH/RWM	160/200/250	6	6+1	Standard:6.9 High pressure:21.0
	320	6	8+1	
	250	10+1	—	
	320	12+1	—	
RWB	400/500/600	16+1	—	Standard:6.9 High pressure:21.0
	200	6	—	
	130/160/200/250	6	—	
TWS	320	8+1	—	
	630/1000	12+1	—	
TWM	100	3	—	
	160/250	6	—	

External mount type



Internal mount type




Example of use

\*Please contact us for models not listed.

\*The maximum number of ports "6" are all Compact Rotary Joints with a maximum input pressure of 21 MPa.

## Compact Rotary Joint

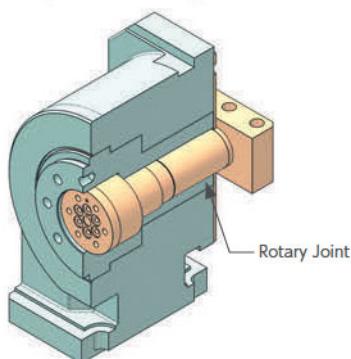

### [Specifications]

Max. number of ports: 6 port  
Rated supplied pressure: 21.0MPa

### [Applicable models]


Compatible with models with center hole  $\Phi 40$  mm (through hole) or larger.

RBS/RBH/RBM, RWE/RWA/RWH/RWM, TBS, TWA/TWM series, SS/SE/SH series.

\*Please contact us for more information about TWM.

## Pallet Clamp

An NC rotary table with a built-in pallet clamp is available. This type of rotary table enables fast and highly accurate positioning of workpieces at any angle. Attachment of an auto-coupler makes it possible to apply hydraulic or pneumatic pressure to the top surface of pallets. By combining with a pallet-changer, setup, transfer and exchange can be carried out automatically.

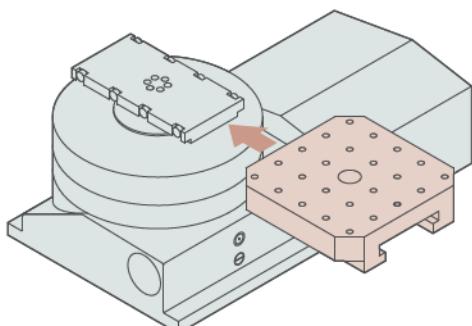


## Air-hydraulic Booster

Air-hydraulic boosters are available for machines without a hydraulic source, which convert pneumatic pressure into hydraulic pressure for clamping.

Type	Applicable model	Dimensions
TB-80	RWB-250 RWB-250 + SSB-160 RWB-320 RWB-400 RCB-350 RCB-450 TWB-320	
TB-100	RWB-320 + SSB-210 RWB-400 + SSB-255 RWB-500 RWB-500 + SSB-310 RWB-630 RWB-630 + SSB-310 RCB-550 TWB-630	

Type	Applicable model	Dimensions
TB-115	RCH/RCV-800 RCH/RCV-1000 RCH/RCV-1250	

### Mounting position

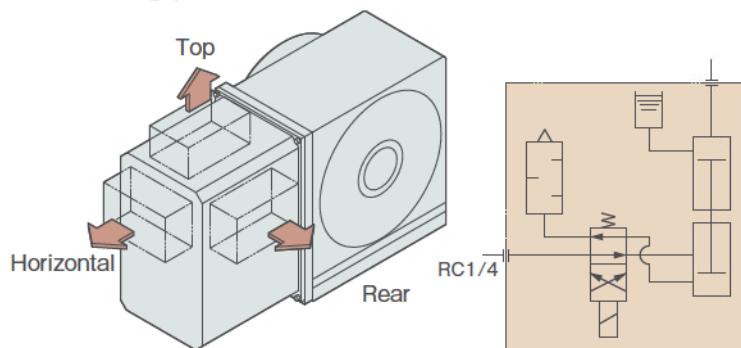

### Please specify the following items:

1. Mounting position of the Air-hydraulic booster
2. Control voltage for the solenoid of the Air-hydraulic unit: 100VAC or 24VDC (This voltage depends on the machine to be attached)

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV

RTT

TDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## Applicable Servo Motors

FANUC  $\alpha$ i type servo motors are specified for each NC table model in the specifications table. The table below shows other servo motors, which have equivalent capacity to those of FANUC  $\alpha$ i motors.


	FANUC	$\alpha$ iF2/5000 ( $\alpha$ iS2/5000)	$\alpha$ iF4/5000 ( $\alpha$ iS4/5000)	$\alpha$ iF8/3000 ( $\alpha$ iS8/4000)	$\alpha$ iF12/4000 ( $\alpha$ iS12/4000)	$\alpha$ iF22/3000 ( $\alpha$ iS22/4000)
MITSUBISHI	HG75T	HG54T	HG104T	HG204S	HG354S	
YASKAWA	SGM7P-04	SGM7G-05	SGM7G-09	SGM7G-20	SGM7G-30	
OKUMA	BL-ME24M	BL-MT40M	BL-MT80M	BL-MT150M	BL-MT200M	
SIEMENS	1FK7042	1FK7060	1FK7063	1FK7083	1FK7101	
HEIDENHAIN	QSY96A	QSY116C	QSY116E	QSY155B	QSY155D	

Note 1: Some motors have speed reduction ratio (max rpm) or outline dimensions different from those of FANUC motors.

Note 2: The motors shown above are classified according to motor torque capacity. The motor which is suitable for your machines depends on the specifications of your machine NC controllers. Contact the machine manufacturer about motor selection.

## Applicable Cable Connectors

All cable plugs and connectors for Tsudakoma's NC rotary tables should be waterproof. Refer to the table below.

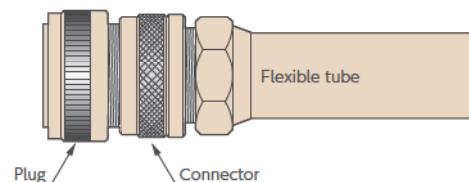

### Example of cable plug connectors

		Rotary table receptacle	Cable plug	Connector	Flexible tube
For signal cable	Fanuc	N/MS3102A20-29PW (Japan Aviation Electronics Industry, Ltd.)	JA06A20-29SW-J1-R (Japan Aviation Electronics Industry, Ltd.)	KMKD22-20 (SANKEI MANUFACTURING CO.,LTD.)	KPF-22 (SANKEI MANUFACTURING CO.,LTD.)
	MITSUBISHI ELECTRIC	N/MS3102A22-14P (Japan Aviation Electronics Industry, Ltd.)	JA06A22-14S-J1-R (Japan Aviation Electronics Industry, Ltd.)	KMKD22-22 (SANKEI MANUFACTURING CO.,LTD.)	
For power cable		N/MS3102A28-11P (Japan Aviation Electronics Industry, Ltd.)	JA06A28-11S-J1-R (Japan Aviation Electronics Industry, Ltd.)	KMKD28-28 (SANKEI MANUFACTURING CO.,LTD.)	KPF-28 (SANKEI MANUFACTURING CO.,LTD.)

### Example of cable plug connectors (with a FANUC $\alpha$ iF motor)

		Rotary table receptacle	Cable plug	Connector	Flexible tube
For signal cable		N/MS3102A20-29PW (Japan Aviation Electronics Industry, Ltd.)	JA06A20-29SW-J1-R (Japan Aviation Electronics Industry, Ltd.)	NBKD-20-20 (SANKEI MANUFACTURING CO.,LTD.)	NSBS #20 (SANKEI MANUFACTURING CO.,LTD.)
For power cable		JL04V-2A28-11PE-R (Japan Aviation Electronics Industry, Ltd.)	JL04V-6A28-11SE-R (Japan Aviation Electronics Industry, Ltd.)	NBKD-32-28 (SANKEI MANUFACTURING CO.,LTD.)	NSBS #32 (SANKEI MANUFACTURING CO.,LTD.)

Note: JA06A□□ plug is waterproof when the plug is inserted.

## Flow Chart of Control System


It is recommended to control with the servo ON for semi-closed loops in principle. In case of fully-closed loop, control with servo OFF. A recommended example is shown on the right.

Note 1: In a semi-closed loop control operation, do not turn the Servo motor OFF even when the rotary table is clamped.


Note 2: In a semi-closed operation, when the eccentric load increases in size, and a large current (70% or more of the rated current) is being applied, turn the Servo motor OFF and follow the steps for the full-closed loop control.

Note 3: Delay time is our recommended time. Parameters may differ depending on the specifications. Ask us for further information.

### a) Semi-closed loop control

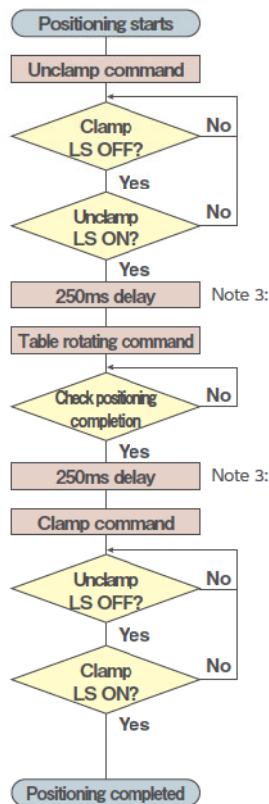

### b) Fully-closed loop control

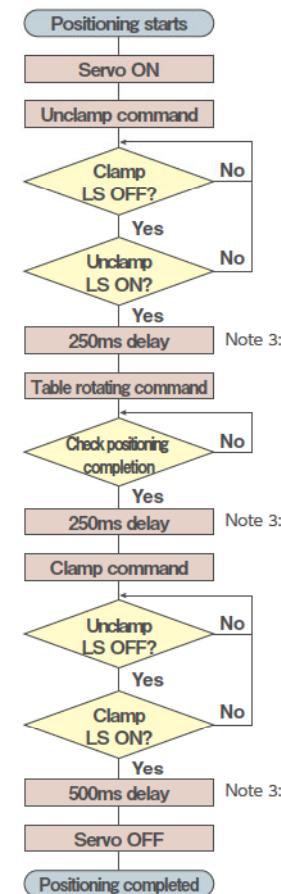

## Indexing Cycle Time

The graphs below show the required indexing time which includes the time for the control command for the machine tools. This information helps you examine the cycle time of your process with the rotary table. Table rotation speed and acceleration and deceleration constants may differ depending on the model of the rotary table. If any data other than that shown below is required, please ask us.

**A** : Without clamp command

**B** : For hydraulic clamp (0.4Sec)

**C** : For pneumatic clamp (0.6Sec)

**D** : For air-hydraulic clamp (1.05Sec)

\* ( ) shows Clamp & Un-clamp required time

Table rpm 8000deg/min (22.2min<sup>-1</sup>)

Acceleration/deceleration constant : 150ms


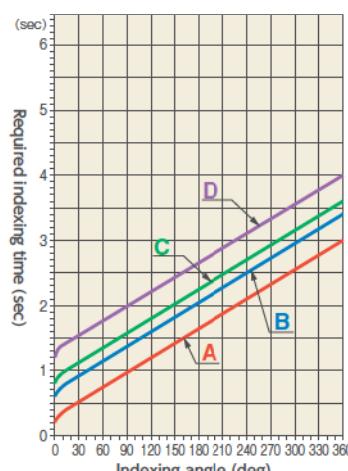


Table rpm 12000deg/min (33.3min<sup>-1</sup>)

Acceleration/deceleration constant : 150ms

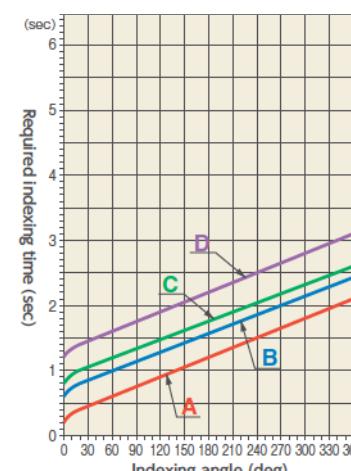

Note: For the above B and C cases, the indexing time includes the time to respond to the clamp and unclamp confirmation signals.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNC

Multi-Spindle  
TWM

RDS

RTV  
RTT

TDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## Workpiece mounting space for tilting rotary tables

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNC

Multi-Spindle  
TWM

RDS

RTV

RTT

TDS

TDB

NC Controllers

Accessories

Options

Technical  
Information

TBS-130		
0 to +90°	0 to +110°	-30° to 0
TBS-160		
0 to +90°	0 to +110°	-30° to 0
TBS-250		
0 to +90°	0 to +110°	-30° to 0
TWA-100		
0 to +90°	0 to +107°	-17° to 0
TWA-130		
0 to +90°	0 to +107°	-17° to 0
TWA-160		
0 to +90°	0 to +110°	-30° to 0
TWA-200		
0 to +90°	0 to +110°	-30° to 0
TN-320		
0 to +90°	0 to +110°	-30° to 0

TN-450	
-10° to +95°	-15° to +100°
※Emergency stop angle Loading area is set taking the inertia of 10° from the emergency stop position into consideration.	

TWM-100,PS	
-17° to +90°	0 to +107°
TWM-160,PS	
-30° to +90°	0 to +100°
TWM-160,PL	
-30° to +90°	0 to +100°
TWM-250,PS	
-30° to +90°	0 to +100°
TWM-250,PL	
-30° to +90°	0 to +100°
TWB-630	
-110° to +110°	-90° to +90°

TWB-320			TDB-200/TDS-200	
0 to +90°	0 to +110°	-30° to 0	-100° to +10°	

Note 1: If the tilting angle is over the above range or the table stops by emergency stop, check the unit.

Note 2: Be sure to remove the eye bolts used for lifting before using the rotary table.


## Explanation of Technical Terms

In order to help you understand Tsudakoma's products, here are some explanations about the main specifications.

### Indexing Accuracy

After indexing one rotation of the table equally according to the tooth number of the worm gear, obtain the difference between the theoretical turning angle and the measured angle. The indexing accuracy is the sum of the maximum difference in positive values and that in negative values (absolute values).

Table Turning Angle and Indexing Measurement Data

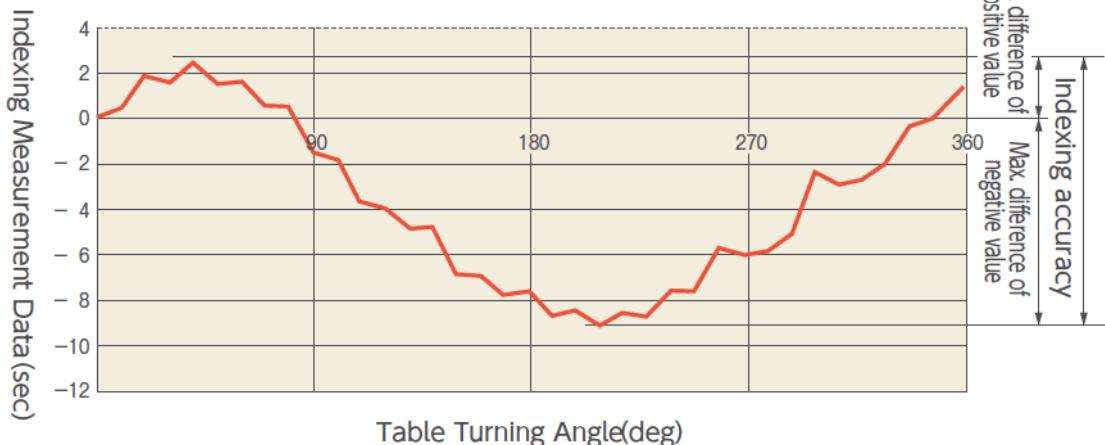

### Clamp Torque

Clamp torque is only the force of the clamping mechanism, which does not include force caused by self-locking of a worm gear. The clamp torque shown in the catalog is the figure obtained when the rated pressure (3.5 MPa for hydraulic pressure, and 0.49 MPa for pneumatic pressure) is supplied to the working fluid. When a larger clamp torque is required, increase the pressure gradually up to the maximum allowable pressure (4.9 MPa for hydraulic pressure, 0.69 MPa for pneumatic pressure) to increase the clamp torque.

### Worm Gear Strength

Worm gear strength is the allowable wheel torque when table rpm is 1 min-1. The allowable torque for the worm wheel is calculated according to the standards stipulated by the Japan Gear Manufacturers Association.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers





Accessories

Options






Technical  
Information

## To make the best use of TSUDAKOMA NC rotary tables


**1** First of all, determine the NC controller system that best controls the NC rotary tables.

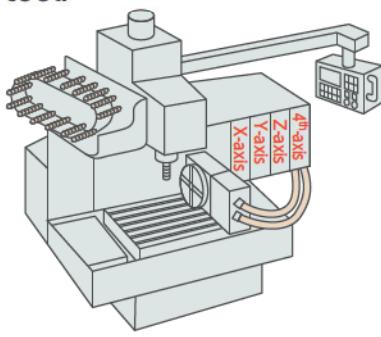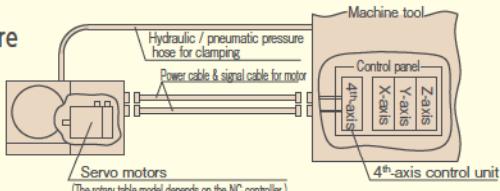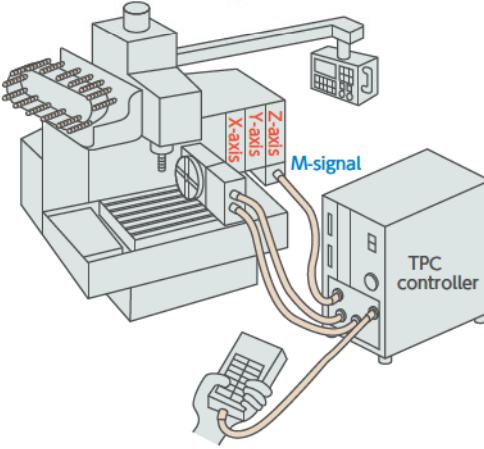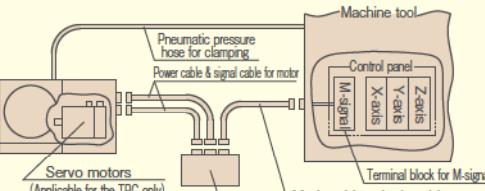NC control system 1	NC control system 2
<p>A control unit for the 4<sup>th</sup> axis (or 5<sup>th</sup> axis) should be installed in the NC controller of the machine tool.</p>  <p><b>Structure</b></p>  <p><b>Features</b></p> <ul style="list-style-type: none"> <li>Simultaneous and continuous circular cutting on the X, Y, and Z-axes is possible depending on the specifications of the machine tool.</li> <li>The program of the rotary table should be input at the machine tool.</li> </ul>	<p>The TPC single axis NC controller of TSUDAKOMA is applied, receiving an M-signal from the machine tool.</p>  <p><b>Structure</b></p>  <p><b>Features</b></p> <ul style="list-style-type: none"> <li>Even if the 4<sup>th</sup> (or 5<sup>th</sup>) axis cannot be installed on a machine tool, the TPC controller can be used with an M-signal.</li> <li>Basically, this control system is only for indexing.</li> <li>Program for a rotary table should be input directly to the TPC. At the machine tool, an M-signal is input as a start command.</li> </ul>


**2** Please select the most suitable model of NC rotary tables, depending on the workpiece and cutting conditions.

● Workpiece diameter	● Workpiece weight	● Workpiece positioning	● When an eccentric load is applied:	● Workpiece of larger diameter, but lighter weight
				

**3** Please select the handedness of the NC rotary tables.

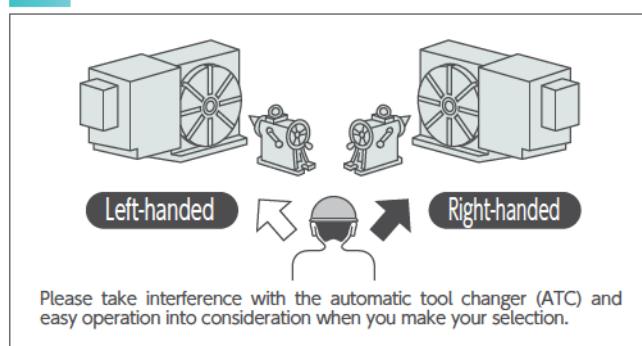

**4** Please take interference with a machining center into consideration when selecting a table.

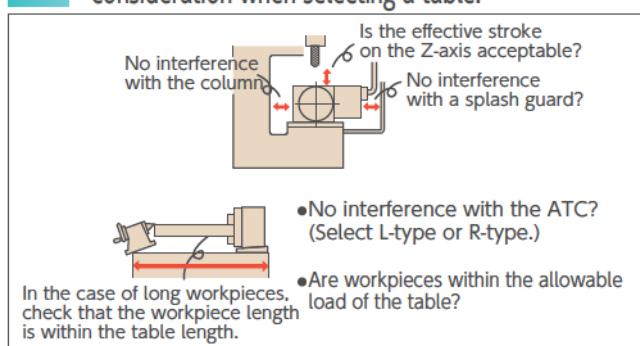


## If you need our help to select the best model for you:

Inform TSUDAKOMA of the information below, and TSUDAKOMA will suggest the best model for you.

Fill in this page and send it to a local distributor or TSUDAKOMA. Fax : +81-76-294-5157

1. Customer \_\_\_\_\_ Tel \_\_\_\_\_
2. Model considering \_\_\_\_\_ Unit \_\_\_\_\_
3. Machine Manufacturer \_\_\_\_\_  
Model \_\_\_\_\_ (New • Installed)  
NC controller \_\_\_\_\_
4. Coolant oil Not used Used (Oil • Water) (Normal • High Pressure)
5. Workpiece Kind \_\_\_\_\_ Material \_\_\_\_\_ Weight \_\_\_\_\_  
Dimensions Height (\_\_\_\_\_) × Length (\_\_\_\_\_) × Width (\_\_\_\_\_) mm  
Inner dia (\_\_\_\_\_) × Outer dia (\_\_\_\_\_) × Length (\_\_\_\_\_) mm
6. Layout of workpiece and fixture (Write the detailed dimensions from the top surface or the center of the face plate)

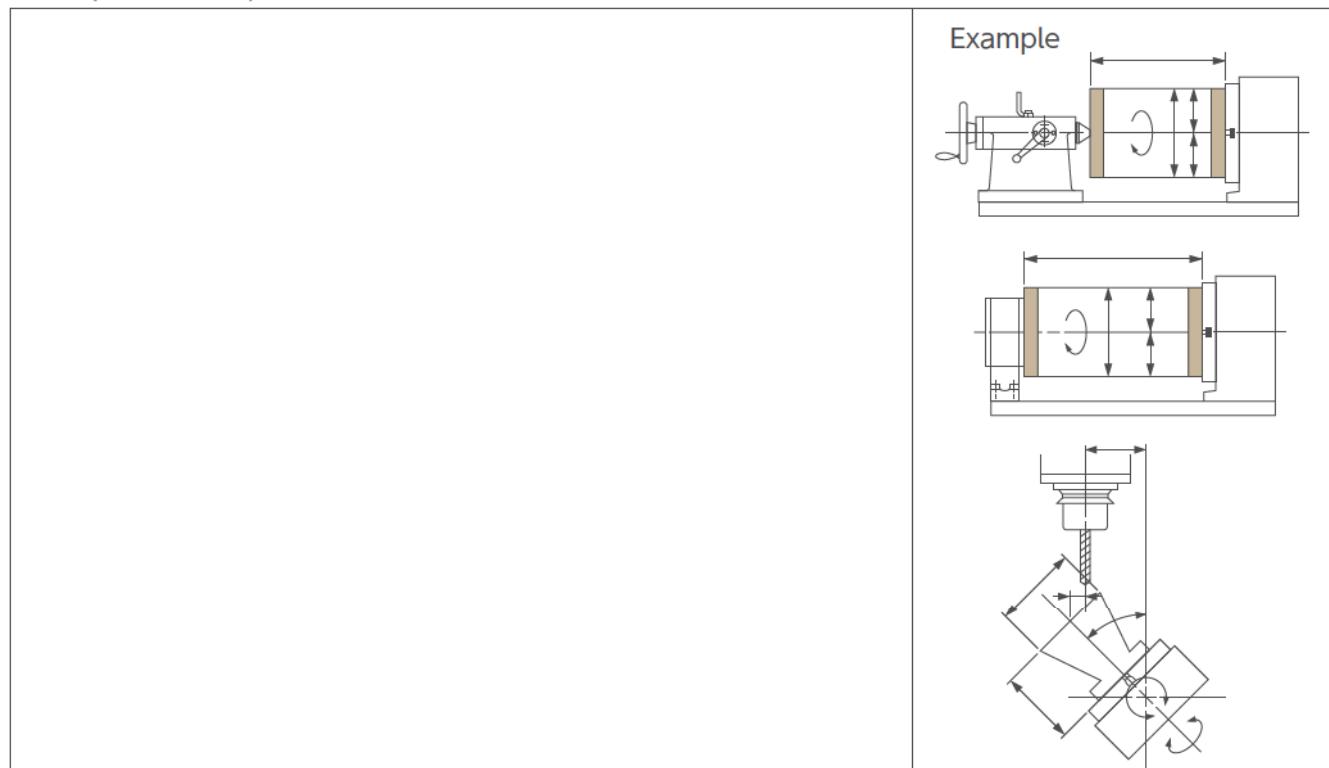

### 7. Cutting conditions

Cutting point	Cutter / teeth number	Cutting speed (V)	Cutting feed rate mm/min	Cutting depth mm/time	Cutting process (Indexing or continuous cutting)
a					
b					
c					
d					

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers


Accessories

Options

Technical  
Information

## Inspection Standard

### NC Rotary Tables

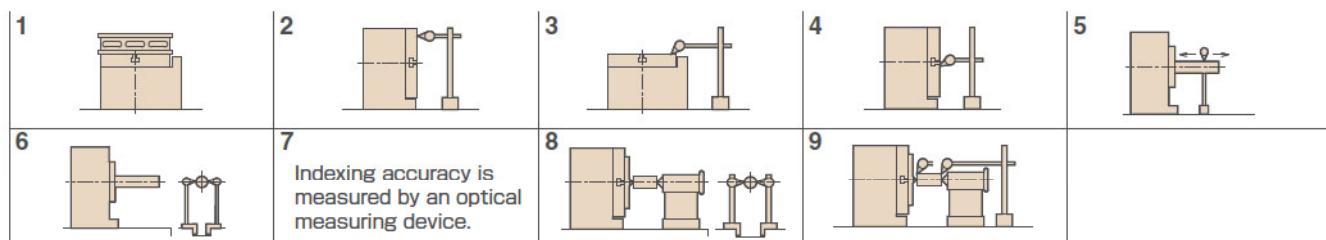

### RBS/RBH

No.	Inspection items	Tolerance					
		RBS/RBH-160		RBS/RBH-250		RBS/RBH-320	
	Standard	With a scale	Standard	With a scale	Standard	With a scale	
2	Spindle top runout	—	—	0.01	0.01	0.01	0.01
3	Parallelism top to frame bottom	Per 200mm	Horizontal	0.02	0.02	0.02	0.02
4	Center bore runout	Spindle nose	—	0.01	0.01	0.01	0.01
5	Parallelism of rotary axis center line to frame bottom	Per 200mm	Vertical	0.02	0.02	0.02	0.02
6	Parallelism of rotary axis center line to guide blocks	Per overall length	Vertical	0.02	0.02	0.02	0.02
7	Indexing accuracy(arc sec.)	Cumulative	—	15   15	15   10	15   10	15   10
8	Parallelism of center line between rotary table and tailstock to frame bottom guide blocks	Per 300mm	Vertical	0.02	0.02	0.02	0.02
9	Height difference of both center lines of rotary table and tailstock	—	Vertical	0.02	0.02	0.02	0.02

Note: The indexing accuracy above is for tables with MP scales. See P.64 for indexing accuracy of HEIDENHAIN rotary encoders.

### RWE/RWA/RWH

No.	Inspection items	Tolerance					
		RWE/RWA/RWH-160		RWE/RWA/RWH-200		RWA/RWH-250,320	
	Standard	With a scale	Standard	With a scale	Standard	With a scale	
2	Spindle top runout	—	—	0.01	0.01	0.01	0.01
3	Parallelism top to frame bottom	Per 200mm	Horizontal	0.02	0.02	0.02	0.02
4	Center bore runout	Spindle nose	—	0.01	0.01	0.01	0.01
5	Parallelism of rotary axis center line to frame bottom	Per 200mm	Vertical	0.02	0.02	0.02	0.02
6	Parallelism of rotary axis center line to guide blocks	Per overall length	Vertical	0.02	0.02	0.02	0.02
7	Indexing accuracy(arc sec.)	Cumulative	—	25   15	20   15	20   10	20   10
8	Parallelism of center line between rotary table and tailstock to frame bottom guide blocks	Per 300mm	Vertical	0.02	0.02	0.02	0.02
9	Height difference of both center lines of rotary table and tailstock	—	Vertical	0.03	0.03	0.03	0.03

Note: The indexing accuracy above is for tables with MP scales. See P.64 for indexing accuracy of HEIDENHAIN rotary encoders.

### RWB

No.	Inspection items	Tolerance					
		RWB-250,320		RWB-400,500		RWB-630	
	Standard	With a scale	Standard	With a scale	Standard	With a scale	
1	Table top flatness(concave)	Per overall length	—	0.01	0.01	0.02	0.01
2	Table top runout	—	—	0.015	0.01	0.015	0.02
3	Parallelism of table top to frame bottom	Per overall length	Horizontal	0.02	0.01	0.02	0.03
4	Center bore runout	Spindle nose	—	0.01	0.005	0.01	0.005
5	Parallelism of rotary axis center line to frame bottom	Per 300mm	Vertical	0.02	0.01	0.015	0.01
6	Parallelism of rotary axis center line to guide blocks	Per 300mm	Vertical	0.02	0.01	0.015	0.015
7	Indexing accuracy(arc sec.)	Cumulative	—	14	8	14	8
8	Parallelism of center line between rotary table and tailstock to frame bottom guide blocks	Per 300mm	Vertical	0.02	0.01	0.02	0.01
9	Height difference of both center lines of rotary table and tailstock (tailstock center line should be higher)	—	Vertical	0.02	0.01	0.02	0.02

Note1: The indexing accuracy above is for tables with MP scales. See P.64 for indexing accuracy of HEIDENHAIN rotary encoders.

Note2: For RWB-K, No.3 is not required.

**RCV**

Unit: mm

No.	Inspection items	Tolerance								
		RCV-800	RCV-1000	RCV-1250	RCV-1600	Standard	With a scale	Standard	With a scale	Standard
1	Table top flatness(concave)	Per overall length	—	0.03	0.02	0.04	0.02	0.04	0.04	0.04
2	Table top runout	—	—	0.02	0.01	0.03	0.02	0.03	0.03	0.03
3	Parallelism of table top to frame bottom	Per overall length	Horizontal	0.03	0.02	0.04	0.02	0.04	0.04	0.04
4	Center bore runout	Spindle nose	—	0.01	0.01	0.01	0.01	0.01	0.01	0.01
5	Parallelism of rotary axis center line to frame bottom	Per overall length	Vertical	0.03	0.02	0.04	0.03	0.04	0.04	0.04
6	Parallelism of rotary axis center line to guide blocks	Per overall length	Vertical	0.03	0.03	0.04	0.03	0.04	0.04	0.04
7	Indexing accuracy(arc sec.)	Cumulative	—	15	8	15	8	15	15	15
8	Parallelism of center line between rotary table and tailstock to frame bottom guide blocks	Per 300mm	Vertical	0.02	0.02	0.02	0.02	0.03	0.03	0.03
9	Height difference of both center lines of rotary table and tailstock (tailstock center line should be higher)	—	Vertical	0.02	0.02	0.02	0.02	0.04	0.04	0.04

Note: The indexing accuracy above is for tables with MP scales. See P.61 for indexing accuracy of HEIDENHAIN rotary encoders.

**RDS-200**

Unit: mm

No.	Inspection items	Tolerance	
		RDS-200	
1	Spindle end flatness(concave)	Per overall length	0.010
2	Spindle end runout	—	0.010
4	Spindle center runout	Spindle nose	0.010
5	Parallelism of rotary axis center line to frame bottom	Per 200mm	0.020
6	Parallelism of rotary axis center line to guide blocks	Per overall length	0.020
7	Indexing accuracy(including pitch error compensation)	Cumulative	20
8	Parallelism of center line between rotary table and tailstock to frame bottom guide blocks	Per 300mm	0.020
9	Height difference of both center lines of rotary table and tailstock (tailstock center line should be higher)	—	±0.030

**RBS****RBH**Multi-Spindle  
**RBM****TBS**RWE/RWA  
**RN****RWH**RWA-B  
RNCV-B**RWB**RWB-K  
RNCK**RCB**RCH  
**RNC****RCV**Multi-Spindle  
**RWM****TWA/TN**TWB  
TTNCMulti-Spindle  
**TWM****RDS**RTV  
RTTTDS  
TDB

NC Controllers


Accessories

Options

Technical  
Information

## Inspection Standard

### NC Rotary Tables

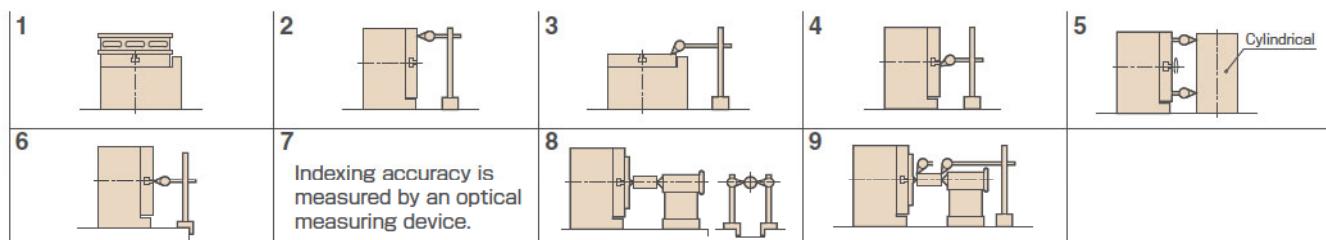

### RN

No.	Inspection items	Tolerance RN-100		
		—	Horizontal	0.01
2	Spindle top runout	—	—	0.01
3	Parallelism top to frame bottom	Per overall length	Horizontal	0.015
4	Center bore runout	Spindle nose	—	0.01
5	Perpendicularity of spindle top to frame bottom	Per overall length	Vertical	0.02
6	Perpendicularity of spindle to frame bottom guide blocks	Per overall length	Vertical	0.02
7	Indexing accuracy (arc sec.)	Cumulative	—	45
9	Height difference of both center lines of rotary table and tailstock	—	Vertical	0.03

### RCB

No.	Inspection items	Tolerance		
		RCB-350	RCB-450	RCB-550
1	Table top flatness (concave)	Per overall length	0.010	0.020
2	Table top runout	—	0.015	0.015
4	Center bore runout	Spindle nose	0.010	0.010
5	Perpendicularity of table top and frame bottom	Per overall length	0.020	0.020
6	Perpendicularity of table top to frame bottom guide blocks	Per overall length	0.020	0.020
7	Indexing accuracy (arc sec.)	Cumulative	15	15
8	Parallelism of center line between rotary table and tailstock to frame bottom guide blocks	Per 300mm	0.020	0.020
9	Height difference of both center lines of rotary table and tailstock (tailstock center line should be higher)	—	0.020	0.020

### RNCK

No.	Inspection items	Tolerance	
		RNCK-631	Standard With a scale
1	Table top flatness (concave)	Per overall length	0.03 0.02
2	Table top runout	—	0.02 0.01
4	Center bore runout	Spindle nose	0.01 0.005
5	Perpendicularity of table top and frame bottom	Per overall length	0.03 0.02
6	Perpendicularity of table top to frame bottom guide blocks	Per overall length	0.03 0.03
7	Indexing accuracy (arc sec.)	Cumulative	15 8
8	Parallelism of center line between rotary table and tailstock to frame bottom guide blocks	Per 300mm	0.02 0.02
9	Height difference of both center lines of rotary table and tailstock (tailstock center line should be higher)	—	0.02 0.02

Note: The indexing accuracy above is for tables with MP scales. See P.61 for indexing accuracy of HEIDENHAIN rotary encoders.

### RCH/RNC

No.	Inspection items	Tolerance					
		RCH-800		RCH-1000,1250 RNC-1501		RNC-2001	
Standard	With a scale	Standard	With a scale	Standard	With a scale	Standard	With a scale
1	Table top flatness (concave)	Per overall length	0.03 0.02	0.04 0.02	0.02 0.04	0.04 0.03	0.03 0.02
2	Table top runout	—	0.02 0.01	0.03 0.02	0.02 0.03	0.03 0.02	0.02 0.02
3	Parallelism of table top to frame bottom	Per overall length	0.03 0.02	0.04 0.02	0.02 0.04	0.04 0.03	0.03 0.02
4	Center bore runout	Spindle nose	0.01 0.01	0.01 0.01	0.01 0.01	0.01 0.01	0.01 0.01
7	Indexing accuracy (arc sec.)	Cumulative	15 8	15 8	8 15	15 8	8 15

Note: The indexing accuracy above is for tables with MP scales.

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV  
RTTTDS  
TDB

NC Controllers

Accessories

Options

Technical  
Information

## NC Tilting Rotary Tables

6 · 7 Tilting angle and indexing accuracy are measured by means of optical equipment.	8				

## TBS

Unit: mm

No.	Inspection items	Tolerance		
		TBS-130	TBS-160	TBS-250
2	Spindle(Table) top runout	—	0.01	0.01
3	Parallelism of spindle(table) top to frame bottom	Per overall length	0.015	0.015
4	Parallelism of tilt axis center to frame bottom	Per overall length	0.02	0.02
5	Center bore runout	Spindle nose	0.01	0.01
6	Tilting accuracy(arc sec.)	Cumulative(0° to +90°)	30	30
7	Indexing accuracy(arc sec.)	Cumulative(−30° to +90°)	40	40
8	Parallelism(Perpendicularity) of rotary axis center line to guide blocks	Per overall length(90 degree)	0.015	0.015

## TWA/TN

Unit: mm

No.	Inspection items	Tolerance					
		TWA-100	TWA-130	TWA-160	TWA-200	TN-320	TN-450
1	Table top flatness(concave)	Per overall length	—	—	—	0.01	0.02
2	Spindle(Table) top runout	—	0.01	0.01	0.01	0.015	0.015
3	Parallelism of spindle(table) top to frame bottom	Per overall length	0.015	0.015	0.015	0.02	0.02
4	Parallelism of tilt axis center to frame bottom	Per overall length	0.02	0.02	0.02	0.02	0.02
5	Center bore runout	Spindle nose	0.015	0.01	0.01	0.01	0.01
6	Tilting accuracy(arc sec.)	Cumulative(0° to +90°)	45	45(15)	45	45	90
7	Indexing accuracy(arc sec.)	Cumulative(−30° to +90°)	—	—	60	60	—
8	Parallelism(Perpendicularity) of rotary axis center line to guide blocks	Per overall length(90 degree)	0.015	0.015	0.015	0.02	0.02

Note 1: For No. 8, values differ depending on the mounting direction of the guide block.

Note 2: For TWA, the "table top" is the "spindle top".

Note 3: Values in ( ) for TWA-130 are accuracy for tables with rotary encoders and MP scales for high precision. (Please see P.61)

## TWB

Unit: mm

No.	Inspection items	Tolerance		
		TWB-320	TWB-630	TWB-1000
1	Table top flatness(concave)	Per overall length	0.010	0.030
2	Table top runout	—	0.015	0.020
3	Parallelism of table top to base bottom	Per overall length	0.020	0.030
4	Parallelism of tilt axis center to base bottom	Per overall length	0.020	0.030
5	Center bore runout	Spindle nose 0° to +90°	0.010 45	0.010 —
6	Tilting accuracy(arc sec.)	−30° to +90° −110° to +110°	60 —	— 60
7	Indexing accuracy(arc sec.)	Cumulative	20	15
8	Parallelism(Perpendicularity) of rotary axis center line to guide blocks	Per overall length(90 degree)	0.020	0.020









## TDS/TDB

Unit: mm

No.	Inspection items	Tolerance	
		TDS-200	TDB-200
2	Spindle top runout	—	0.010
3	Parallelism of Spindle top to base bottom	Per overall length	0.020
4	Parallelism of tilt axis center to base bottom	Per overall length	0.020
5	Center bore runout	Spindle nose	0.010
6	Tilting accuracy(arc sec.)	−100° to +10°	20
7	Indexing accuracy(arc sec.)	Cumulative	20
8	Parallelism(Perpendicularity) of rotary axis center line to guide blocks	Per overall length(90 degree)	0.020

## Inspection Standard

### NC Rotary Tables / Multi-Spindle

### RBM

No.	Inspection items	Tolerance	
		RBM-160	
1	Spindle top runout	—	0.010
2	Center bore runout	Spindle nose	0.010
3	Indexing accuracy(arc sec.)	Cumulative	15
4	Parallelism of rotary axis center to base bottom	Per overall length	0.010
5	Parallelism of rotary axis center to bottom guide blocks(Perpendicularity)	Per overall length	0.020
6	Difference between both center heights	—	0.020
7	Difference of spindle end	—	0.020
8	Height difference of both center lines of rotary table and tailstock	—	0.020











Note 1: If the base has no guide block, "base bottom guide block" in the above instructions (No. 5) should be construed as "base bottom".

### RWM

No.	Inspection items	Tolerance			
		RWM-160	RWM-200	RWM-250	RWM-320
1	Spindle top runout	—	0.01	0.01	0.01
2	Center bore runout	Spindle nose	0.01	0.01	0.01
3	Indexing accuracy(arc sec.)	Cumulative	25	20	20
4	Parallelism of rotary axis center to base bottom	Per overall length	0.02	0.02	0.02
5	Parallelism of rotary axis center to bottom guide blocks(Perpendicularity)	Per overall length	0.02	0.02	0.02
6	Difference between both center heights	—	0.02	0.02	0.02
7	Difference of spindle end	—	0.02	0.02	0.02
8	Height difference of both center lines of rotary table and tailstock	—	0.03	0.03	0.03

Note 1: If the base has no guide block, "base bottom guide block" in the above instructions (No. 5) should be construed as "base bottom".

### NC Tilting Rotary Tables / Multi-Spindle

### TWM

No.	Inspection items	Tolerance		
		TWM-100	TWM-160	TWM-250
1	Spindle top flatness(concave)	Per overall length	0.01	0.01
2	Spindle top runout	—	0.01	0.01
3	Difference between average heights of both spindle tops	0 degree	0.02	0.02
4	Parallelism of spindle top to base bottom	Per overall length	0.015	0.015
5	Parallelism of tilt axis center to base bottom	Per overall length	0.02	0.02
6	Center bore runout	Spindle nose	0.015	0.01
7	Tilting accuracy(arc sec.)	0° to +90°	45	60
8	Indexing Accuracy(arc sec.)	Cumulative	40	30
9	Table center distance	—	±0.02	±0.02
10	Difference between both center heights	90 degree	0.02	0.02
11	Parallelism of tilt axis center to frame bottom guide blocks	Per 300mm (90 degree)	0.015	0.015

RBS

RBH

Multi-Spindle  
RBM

TBS

RWE/RWA  
RN

RWH

RWA-B  
RNCV-B

RWB

RWB-K  
RNCK

RCB

RCH  
RNC

RCV

Multi-Spindle  
RWM

TWA/TN

TWB  
TTNCMulti-Spindle  
TWM

RDS

RTV

RTT

TDS

TDB

NC Controllers

Accessories

Options

Technical  
Information

## NOTES

### OPERATION ENVIRONMENT AND MAINTENANCE RECOMMENDED TO KEEP PERFORMANCE AND FUNCTION

- **Do not use any coolant of chlorine or strong alkaline.**
- Do not use any corrosive gas, water, steam or chemicals damaging sealing parts.
- **Lubricant is indispensable** in order to operate a rotary table smoothly and to maintain its functions for a long time. **Supply a recommended lubricant (in the operation manual) to the rotary table before operation. If a designated brand is listed, use only the designated brand of lubricant. Change all the lubricant periodically.**
- If a lot of cutting chips, (generated by machining.) accumulate on some sections of rotary table, install adequate covers for protection.
- Operate a rotary table within the specified range of temperature.
- Depending upon the operation environment, there is a possibility of dew condensation which may cause a malfunction or a rust problem of electrical components, so provide air-purging inside the motor cover. (Do not close the outlet of exhaust air.) **See Fig. 1.**
- When assembling a faceplate or a fixture with the main spindle, make the inner diameter section as the reference for fitting as shown in **Fig. 2.**
- Keep the clearance with 5mm or more between a Faceplate or a fixture and a Rotary table. Otherwise, cutting chips may impede the rotation of the main spindle or the waterproof capability of the seals. **See Fig. 2.**

Fig. 1


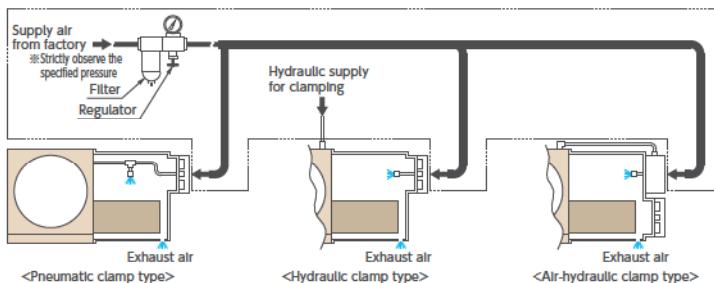


Fig. 2



### SETTING ON MACHINE TOOL AND PREPARATION BEFORE USE

- When moving a rotary table by a hanging method, observe the specified method in the operation manual.
- To fix a rotary table on a machine tool, use the specified fixing parts and follow the specified method.
- Connect each interface cable in accordance with the instructions on the electrical drawing.
- Provide protective measures to avoid adding extraordinary force to any piping or any joint for each interface cable and each connector, to induce any damage, during the operation of a machine tool with a rotary table.
- Each piping is to be connected to the specified input port (connecting port) stated in the outlook drawing.
- Regarding each fluid to be supplied to a rotary table, make sure that **maximum pressure does not exceed the specified pressure** even if there is a pressure variation due to the pressure source or other factors.
- Refer to the recommendable flow chart on Page 69 for the NC control at the time of table clamping.

### DAILY OPERATION, PERIODICAL CHECK AND OTHERS

- Make sure that the weight and size of the workpiece does not exceed the specified value of the workable force during machining.
- In case any abnormality is realized during operation, stop machining immediately.
- When any human work is carried out within the operational area of machine tool, be sure to turn off the power for the machine tool as well as the Tsudakoma controller.
- When restarting from a long stoppage, perform a warm-up operation of the rotary table.
- Do not make any conversion of a rotary table without Tsudakoma's consent.

## Worldwide Sales Contacts

<b>U.S.A.</b>	<b>KOMA PRECISION, INC.</b> Address: 20 Thompson Road, East Windsor, CT 06088 Tel: +1 860 627 7059 Fax: +1 860 623 4132 E-mail: info@komaprecision.com Website: www.komaprecision.com	<b>TÜRKİYE</b>	<b>WOM CNC MAKİNA TEKNOLOJİLERİ</b> Address: Yenişehir Mah. Aral Sk. Özkanca İş Merkezi No:17 K:4 D:4 34779 Ataşehir/İstanbul Tel: +90-536-520-61-24 Fax: +90-533-141-29-49 E-mail: info@wom.com.tr Website: www.wom.com.tr
<b>MEXICO</b>	<b>KOMA PRECISION, INC.</b> Address: Josefa O de Dominguez 222 Int. 02, Quintas Las Manzanas, 52140 Metepec, México. Tel: +52-1-722-394-8432 E-mail: info@komaprecision.com Website : www.komaprecision.com	<b>INDIA</b>	<b>TSUDAKOMA SERVICE INDIA PRIVATE LIMITED</b> Address: 404, Meadows Building, Sahar Plaza Complex, Andheri (EAST) Mumbai-400059, Maharashtra, INDIA Tel: +91-22-46049349, +91-22-46009513
<b>BRASIL</b>	<b>MTMA Brasil Comercio e Representacoes Ltda.</b> Address: Rua Henrique Wiezel, 795-Distrito Industrial CEP13.456-165-Santa Barbara d' Oeste-SP-Brazil Tel: +55 19 99841-1958 E-mail: ortega.rmta@tsudakoma.com.br	<b>KOREA</b>	<b>DAE SUNG HI-TECH CO., LTD.</b> <b>Head Office</b> Address: 10, Techno-daero 2-gil, Hyeonpung-eup, Dalseong-gun, Daegu, 43020, KOREA Tel: +82-53-593-3553 ~ 6 Fax: +82-53-593-3663 Website: www.topdsht.com
<b>ITALY</b>	<b>Tsudakoma Europe S.R.L.</b> Address: Via Palermo 2 20057 Assago Milano Tel: +39 02 50020083 E-mail: info@tsudakomaeurope.com Website: www.tsudakomaeurope.com		<b>Seoul Office</b> Address: # A-1110, 119, Gasan digital 1-ro, Geumcheon-gu, Seoul, 08589, KOREA Tel: +82-2-830-1940 Fax: +82-2-830-1942 E-mail: hs.kim@topdsht.com
	<b>TEOMA S.R.L.</b> Address: Via Giuseppe Verdi, 20 20057 Assago Milano Tel: +39 02 45713787 Fax: +39 02 45705320 E-mail: info@teomasrl.it Website: www.teomasrl.it	<b>TAIWAN</b>	<b>SHIN TONG LONG TRADING CO., LTD.</b> Address: 1F No.9 He Ping Street, Central West District, Tainan City, Taiwan Tel: +886 6 220 6911 Fax: +886 6 229 2900 E-mail: stltn6881@stlco.net Website: www.stlco.net
<b>GERMANY</b>	<b>THD GmbH</b> Address: Spiesheimer Weg 19, 55286 Worrstadt Tel: +49 6732 9379 0 Fax: +49 6732 9379 29 E-mail: info@thdgmbh.de Website: www.thdgmbh.eu	<b>CHINA</b>	<b>TSUDAKOMA (SHANGHAI) CO., LTD.</b> Address: 7F, Room.C, D building, No.2337, Gudai Road, MinhangDistrict, Mapletree Business City Shanghai Shanghai 201100 Tel: +86 21 6432 6538 Fax: +86 21 6432 5579 E-mail: ksales@tsudakoma.co.jp Website: www.tsudakoma.co.jp
<b>FRANCE</b>	<b>DOGA</b> Address:ZA Pariwest-8, avenue Gutenberg-BP53-78311 Maurepas cedex Tel: +33 1 3066 4141 Fax: +33 1 3066 4199 E-mail: doga@doga.fr Website: www.doga.fr	<b>THAILAND</b>	<b>Bestcooper Co., Ltd.</b> Address: 84/160,1 <sup>st</sup> floor, Soi 15, The Living Village, Moo 5, Liapkhlong Rangsit Rd., Tambon Bangpoon Amphoe Mueang Pathumtani, Pathumtani 12000, THAILAND. Tel: +66 2958-8928 Fax: +66 2958-8927 E-mail: sales@bestair.co.th
<b>SPAIN</b>	<b>SERKIDE Integral Services</b> Address: Polígono Industrial de Itziar Parcela M-4 · 3 Apdo. 10 20820 Deba - Itziar (Gipuzkoa) Spain TEL: +34-943-19-92-62 E-mail: accesorios.robotica@serkide.com Website: www.serkide.com	<b>INDONESIA</b>	<b>PT.GANSA TECHNO CENTER, Bandung Indonesia</b> Address: Kopo Plaza G-5, Jl. Peta Lingkar Selatan, Bandung 40233, INDONESIA Tel: +62 22 607 1637-8 Fax: +62 22 607 1639 E-mail: info@gansa-techno.com Website: gansa-techno.com
<b>SWITZERLAND</b>	<b>StuTech AG</b> Address: Sumpfstrasse 28 6312 Steinhausen Schweiz Tel: +41-41-710-82-10 E-mail: info@stutech.com Website: www.stutech.com		

●This catalog includes strategic items prescribed in the Japanese Foreign Exchange and Foreign Trade Act. In order to export such items, permissions must be obtained in accordance with the aforementioned law.

# TSUDAKOMA Corp.

Nonoichi Plant 5-100 Awada, Nonoichi, Ishikawa 921-8529 Japan  
Phone: +81-76-294-5111 Fax: +81-76-294-5157  
www.tsudakoma.co.jp E-mail: ksales@tsudakoma.co.jp



This catalog was printed in vegetable oil ink, using the environmentally friendly waterless offset printing process.